



## Take your fleet management to the next level

The first-choice fleet management device optimises your workflow with broad integration. Equipped with CAN & Bluetooth connectivity and offering I/O interfaces, LINK 740 is designed to improve your fleet's performance, helping your business advance to the next level.

## BENEFITS



## **OPTIMISE YOUR WORKFORCE & BUSINESS PERFORMANCE**

- Improve your fleet performance using precise and up-to-date vehicle data.1
- Reduce your running costs by monitoring real-time and historical fuel usage.1
- · Identify areas of improvement and make effective decisions using our comprehensive reports.



### **GET THE MOST FROM BROAD INTEGRATION**

- Integrate easily with additional hardware, e.g. Webfleet Solutions' PRO Driver Terminals, sensors.
- Access a wide range of business applications through Bluetooth & multiple I/O interfaces.



## TAKE THE STRESS OUT OF YOUR OPERATION

- Stay compliant using remote download support for your digital tachograph data.
- Manage your tax responsibilities using automatic logbook.
- Improve your drivers' performance and safety with driving style analyses.
- Stay on top of maintenance and service schedule with timely reminders.1



## **PUT DATA SECURITY FIRST**

• Ensure data security and privacy with the help of our end-to-end security design.

# **FEATURES**



## SUPPORT FOR TACHOGRAPH SERVICES AND FMS INTERFACE

The LINK 740 sends data from your vehicle's FMS interface and digital tachograph. With Remote Download from Webfleet Tachograph Manager or TachoShare², you get the support to stay compliant with greater ease.



## **BLUETOOTH AND I/O FUNCTIONALITY INTEGRATION**

Your Driver Terminals can connect with Bluetooth. And with 1-wire interface and up to 5 in/output connections simultaneously, you're offered a large variety of different uses.



## **FEATURES**



### **TRACK & TRACE**

View driving times, mileage and locations of your fleet in real-time or over a chosen time period.



### REPORTING ON FLEET PERFORMANCE

Get 24/7 access to comprehensive, customisable vehicle and driver insight reports.



### **CHOOSE 3-WIRE OR NON-INTRUSIVE INSTALLATION**

The optional LINK CAN Sensor 100 enables the LINK 740 to read CAN bus information via a contactless connection.



### MILEAGE OVERVIEW AND LOGBOOK FUNCTIONALITY

Mileage and trip data can be analysed per group or fleet. Logbook with real vehicle odometer<sup>1</sup> allows precise sorting of private & business trip.



### **CRASH DETECTION & DRIVING BEHAVIOUR**

Get notified when an accident is detected. OptiDrive 360 provides driving style insights on up to 8<sup>3</sup> performance indicators.<sup>1</sup>




### **FUEL CONSUMPTION & CHARGING STATUS**

Read real-time and historical insights on your fleet's fuel usage, and battery charging status of your electrical vehicles.1



### MAINTENANCE AND SERVICE REMINDERS

Plan maintenance and service tasks based on real-time mileage. Get automatic notifications<sup>1</sup> about vehicle malfunctions.

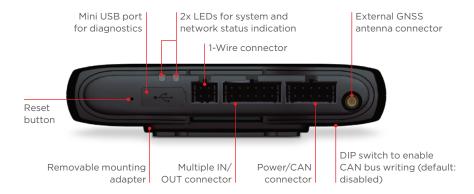

- <sup>1.</sup> The above features are available when a LINK 740 is used with a Webfleet subscription. <sup>2.</sup> FMS or CAN connection required and subject to vehicle/model.
- Additional feature subscription required.

  Speeding, constant speed, driving events, coasting, idling, green speed, fuel consumption and gear shifting.

(w/o mounting holder)

Weight: 96 g (w/o mounting holder)

Supply voltage: 12 V / 24 V (min 9 V to max 30 V)

Temperature: Operation -30°C to +70 °C

Protection class: IP20

Integrated mobile network module with LTE-M and GPRS technology

Integrated GNSS antenna and GNSS receiver - connector for optional external antenna

Acceleration sensor: 3-axis sensor  $(\pm 2 g / \pm 4 g / \pm 8 g)$ 

Current / power consumption (average values):

Δ† 1Δ \/·

Typically < 50 mA / < 0.7 WDuring data transmission < 150 mA / < 2.1 W.

At 28 V:

Typically < 30 mA / < 0.84 W During data transmission < 100 mA / < 2.8 W.

Standby: < 1.5 mA / < 0.05 W.

Mounting: Holder for self-tapping screws or sticky pad.

