

WEBFLEET.connect

1.56.0

Reference Guide



Contents

What's new?	7
Welcome.	9
Terminology.....	10
WEBFLEET components.....	11
WEBFLEET.....	11
LINK.....	11
Connected Driver Terminals.....	11
Non-connected Driver Terminals.....	11
Remote LINK.....	12
LINK 105/ecoPLUS.....	12
Object.....	13
Tracking and tracing.....	14
Tracking.....	14
Tracing.....	14
Trip.....	15
Trip with LINK device.....	15
Trip with navigation device only.....	15
Standstill.....	16
Idle time.....	17
Event.....	18
Driving event.....	19
Order.....	20
Working time.....	21
Working time reporting across vehicles or devices.....	21
Vehicle maintenance.....	22
Maintenance schedule.....	22
Maintenance task.....	22
Additional features.....	23
Programming Guide.....	24
Introduction to WEBFLEET.connect.....	25
Preparing for WEBFLEET.connect.....	26
Access to WEBFLEET.connect with API Key.....	26
Checking requirements.....	26
Creating a user and assigning rights using WEBFLEET.....	26
Making requests to WEBFLEET.connect.....	28
Making HTTP requests.....	28
Getting started with HTTP requests.....	30
HTTP request encoding.....	31
Making SOAP requests.....	32
Getting started with SOAP requests.....	34
SOAP parameters.....	36
Request limits.....	38
Common parameters.....	39
Authentication parameters.....	39
General parameters.....	39
Date range filter parameters.....	41
Reference.....	43

Message queues.....	44
Overview of queues.....	44
createQueueExtern.....	44
deleteQueueExtern.....	45
popQueueMessagesExtern.....	46
ackQueueMessagesExtern.....	56
Message types.....	58
JSON objects.....	70
Parameters specific to acc_events.....	70
Parameters specific to app_data_in.....	71
Parameters specific to app_data_out_status.....	71
Parameters specific to aux_device_data_quota.....	72
Parameters specific to app_data_quota.....	72
Parameters specific to app_data_reference.....	72
Parameters specific to aux_device_data_in.....	72
Parameters specific to aux_device_data_out_status.....	72
Parameters specific to aux_device_data_reference.....	73
Parameters specific to ep_paireddata.....	73
Parameters specific to ep_snapshotdata.....	73
Parameters specific to aux_device_data_in.....	73
Parameters specific to fms_fuel_difference.....	74
Parameters specific to fms_snapshotdata.....	74
Parameters specific to fms_tripdata.....	74
Parameters specific to troublecodes.....	74
Parameters specific to er_tripdata.....	74
Objects.....	76
showObjectReportExtern.....	76
showVehicleReportExtern.....	82
showNearestVehicles.....	85
showContracts.....	88
updateVehicle.....	90
showObjectGroups.....	95
showObjectGroupObjects.....	96
attachObjectToGroup.....	97
detachObjectFromGroup.....	98
insertObjectGroup.....	98
deleteObjectGroup.....	99
updateObjectGroup.....	99
switchOutput.....	100
showWakeupTimers.....	101
updateWakeupTimers.....	102
getObjectFeatures.....	104
updateContractInfo.....	106
getObjectCanSignals.....	107
getObjectCanMalfunctions.....	109
getElectricVehicleData.....	111
getActiveAssetCouplings.....	112
Orders.....	114
sendOrderExtern.....	114
sendDestinationOrderExtern.....	115
updateOrderExtern.....	123
updateDestinationOrderExtern.....	125
insertDestinationOrderExtern.....	129
cancelOrderExtern.....	133
assignOrderExtern.....	134
reassignOrderExtern.....	135
deleteOrderExtern.....	136
clearOrdersExtern.....	137
showOrderReportExtern.....	138
showOrderWaypoints.....	143

Parameters in wp.....	145
Messages.....	146
sendTextMessageExtern.....	146
clearTextMessagesExtern.....	146
showMessages.....	147
sendBinaryMessage.....	149
resetBinaryMessages.....	150
clearBinaryMessages.....	151
Drivers.....	153
Synchronising driver lists.....	153
showDriverReportExtern.....	153
insertDriverExtern.....	157
updateDriverExtern.....	160
deleteDriverExtern.....	163
showOptiDriveIndicator.....	163
showDriverGroups.....	167
showDriverGroupDrivers.....	168
attachDriverToGroup.....	169
detachDriverFromGroup.....	169
insertDriverGroup.....	170
deleteDriverGroup.....	171
updateDriverGroup.....	171
attachDriverToVehicle.....	172
detachDriverFromVehicle.....	173
getDriverRdtRules.....	174
updateDriverRdtRules.....	176
Addresses.....	181
showAddressReportExtern.....	181
showAddressGroupReportExtern.....	183
showAddressGroupAddressReportExtern.....	184
insertAddressExtern.....	185
updateAddressExtern.....	187
deleteAddressExtern.....	190
attachAddressToGroupExtern.....	190
detachAddressFromGroupExtern.....	191
insertAddressGroupExtern.....	191
deleteAddressGroupExtern.....	192
Events.....	194
showEventReportExtern.....	194
acknowledgeEventExtern.....	196
resolveEventExtern.....	197
getEventForwardConfigs.....	197
getEventForwardConfigRecipients.....	199
insertEventForwardConfig.....	200
updateEventForwardConfig.....	201
deleteEventForwardConfig.....	203
Trips and working times.....	204
showTripReportExtern.....	204
showTripSummaryReportExtern.....	209
showTracks.....	210
updateLogbook.....	212
showLogbook.....	213
showLogbookHistory.....	217
updateLogbookMode.....	218
updateLogbookDriver.....	219
showWorkingTimes.....	220
showStandStills.....	223
showIdleExceptions.....	225
getObjectKPIs.....	228
getDriverKPIs.....	230

getRemainingDrivingTimesEU.....	232
KPI names.....	237
Miscellaneous reports.....	240
showIORReportExtern.....	240
showAccelerationEvents.....	241
showSpeedingEvents.....	245
showDigitalInputStateMileage.....	248
Geocoding and routing.....	250
geocodeAddress.....	250
calcRouteSimpleExtern.....	252
Configuration and security.....	256
showSettings.....	256
createSession.....	259
terminateSession.....	260
showAccountOrderStates.....	260
updateAccountOrderState.....	263
showAccountOrderAutomations.....	265
updateAccountOrderAutomation.....	266
getAccountStatusMessages.....	267
getStatusMessages.....	268
setVehicleConfig.....	269
getVehicleConfig.....	270
setStatusMessages.....	271
setAccountStatusMessages.....	273
User management.....	275
showUsers.....	275
changePassword.....	277
insertUser.....	277
Profile and interface style.....	279
updateUser.....	280
deleteUser.....	282
getUserRights.....	282
setUserRight.....	283
resetUserRights.....	284
removeUserRight.....	285
Supported right levels.....	286
Vehicle Maintenance.....	288
insertMaintenanceSchedule.....	288
updateMaintenanceSchedule.....	291
deleteMaintenanceSchedule.....	294
showMaintenanceSchedules.....	294
showMaintenanceTasks.....	297
resolveMaintenanceTask.....	301
Reporting.....	303
getArchivedReportList.....	303
getArchivedReport.....	304
deleteArchivedReport.....	304
getReportList.....	305
createReport.....	305
sendReportViaMail.....	307
Areas.....	309
getAreas.....	309
insertArea.....	311
deleteArea.....	314
updateArea.....	315
getAreaPoints.....	318
getAreaAssignments.....	320
insertAreaAssignment.....	321
deleteAreaAssignment.....	322
getAreaSchedules.....	323

insertAreaSchedule.....	325
deleteAreaSchedule.....	326
LINK.connect.....	328
API key mandatory.....	328
sendAuxDeviceData.....	328
getLocalAuxDeviceConfig.....	329
configureLocalAuxDevice.....	330
getRemoteAuxDeviceConfig.....	331
configureRemoteAuxDevice.....	333
removeRemoteAuxDeviceConfig.....	334
clearAuxDeviceDataQueue.....	335
resetAuxDeviceData.....	336
Plugins.....	337
insertExternalEvent.....	337
setExternalObjectData.....	338
Appendix A Operation response codes.....	339
Response codes.....	340
Response codes - Queues.....	357
Appendix B: Resources.....	358
WEBFLEET.connect resources.....	359
Other resources.....	360
Appendix C: Superseded functionality.....	361
Appendix D: Solving known issues.....	364
Using WEBFLEET.connect SOAP with Visual Basic.....	365
SOAP message size quota in Visual Studio.....	366
Appendix E: Using MTOM with SOAP.....	367
MTOM in the WEBFLEET.connect SOAP API.....	368
Defining binary data in WS parameters.....	368
Java Client Code Generation.....	368
Activating MTOM depending on data size.....	370
Java – server side.....	370
Java – client side.....	370
.NET.....	370
Testing with soapUI.....	370
Appendix F CAN signal types.....	371
CAN signal types.....	372
Revision history.....	376

What's new?

Here you find an overview of what is new or has changed in WEBFLEET.connect 1.56.0.

Please find the full [revision history](#) at the end of this document.

Drivers

- Added parameter drivergroupuid in result of action [showDriverGroupDrivers](#)

Objects

- Added new parameter accelerationvehicletype for actions [showVehicleReportExtern](#) and [updateVehicle](#)

Trips and working times

- Added new result parameter energy_usage for actions [showTripReportExtern](#), [showTripSummaryReportExtern](#), [showTracks](#) and [showLogbook](#)

Configuration and security

- Added new result parameter energy_consumption for action [showSettings](#)

Documentation

- Message queues - [Message types](#) : documentation extended with Estimated time of arrival types 110000766 and 110000767
- Orders - [insertDestinationOrderExtern](#), [updateDestinationOrderExtern](#) and [sendDestinationOrderExtern](#) now contain supported devices PRO 7350 and PRO 5350.
- Orders - [Parameters in wp](#) use of waypoint parameters notify and visible is discouraged
- Messages - [sendBinaryMessage](#) added note that LINK.connect feature is required to run this action.
- Objects - [showObjectReportExtern](#) extended description of parameter engine_operation_time.
- Objects - [showVehicleReportExtern](#) extended description for parameter identnumber.
- Addresses -[insertAddressExtern](#) and [updateAddressExtern](#) extended description of parameter radius.
- Trips and working times - [showWorkingTimes](#) removed restrictions for filter parameter objectno and driverno.
- Vehicle maintenance - [insertMaintenanceSchedule](#), [updateMaintenanceSchedule](#), [showMaintenanceSchedules](#) and [showMaintenanceTasks](#) now contain maintenance schedule types 25 – Diagnostic trouble code and 26 – CAN warning
- [Response codes](#) Added error code documentation 9500 – Address street parameter invalid to documentation

Miscellaneous

- Various internal improvements and stabilisation

Welcome

Welcome to the WEBFLEET.connect Reference Guide.

This document provides all the information you need to integrate WEBFLEET into your applications using the WEBFLEET.connect interface.

The documentation is divided into the following sections:

- [Terminology](#) – In this chapter you learn understanding terms used in the context of WEBFLEET and WEBFLEET.connect products and features.
- [Programming Guide](#) – The programming guide contains a detailed description of how to submit requests to WEBFLEET.connect and the data that is returned by the service, including an explanation of how to enable access to the service.
- Reference – The Reference is a detailed description of all available operations, including their parameters and the data returned by these operations.

More information

Updated versions of this documentation and other resources are available online at <https://www.webfleet.com/webfleet/partners/integration/developer-resources/>

Terminology

Here is a description of the terms used in the context of fleet management and WEBFLEET.

WEBFLEET components

There are three variations of WEBFLEET solutions:

- WEBFLEET connected to a LINK device.
- WEBFLEET connected to a LINK device and a Driver Terminal.
- WEBFLEET connected to a Driver Terminal.

WEBFLEET

WEBFLEET is Webfleet Solutions' innovative Software as a Service (SaaS) fleet management software solution. It gives you secure access to all the information you need to manage your fleet operation in the most effective way. WEBFLEET is the web-based application for managing vehicles and orders and accessing Webfleet Solutions tracking and tracing functionality.

LINK

The LINK is a black box installed in the vehicle. The LINK is connected to the vehicle's power supply and the ignition. It registers ignition events, vehicle movement, and position information and sends all this information to the office. Connected via GPRS to WEBFLEET, it also enables communication between the office and a Driver Terminal. This device enables tracking and tracing.

Different models of the LINK are supported in WEBFLEET:

- LINK 7xx/6xx
- LINK 5xx/4xx
- LINK 3xx
- LINK (first generation)

Connected Driver Terminals

The term **Connected** refers to all Driver Terminals that come with a built-in GPRS modem. Connected navigation devices do not need to establish a connection to a LINK but directly connect to WEBFLEET instead. There are different generations of connected Driver Terminals currently supported in WEBFLEET:

- TomTom PRO 9150
- TomTom PRO 9100
- TomTom PRO 5150, PRO 5250 (purchase of WEBFLEET-compatibility upgrade required)
- TomTom GO 9000

The connected GO devices are similar to each other but the PRO devices have different software and hence work in a different way.

Non-connected Driver Terminals

The term **Non-connected** refers to all Driver Terminals that need a LINK device for communication with WEBFLEET and the office. There are different generations of non-connected devices currently in use:

- PRO 8375
- TomTom PRO 8275 (TRUCK)
- TomTom PRO 8270 (TRUCK)
- TomTom PRO 7250 (TRUCK)

- TomTom PRO 7150 (TRUCK)
- TomTom PRO 7100 (TRUCK)
- TomTom GO 7000 (TRUCK)
- TomTom GO x20/x30
- TomTom GO x10

The non-connected GO devices are similar to each other but the non-connected PRO devices have different software and hence work in a different way.

Remote LINK

Remote LINK is a remote control. It needs to be connected using Bluetooth® to an associated LINK 510/300/310 installed in a vehicle.

There are two variations:

- Remote LINK Working Time
With Remote LINK Working time multiple employees are able to register their working times via the LINK 5xx/4xx/3xx.
- Remote LINK Logbook
With Remote LINK Logbook, drivers are able to maintain a logbook via the LINK 5xx/4xx/3xx.

LINK 105/ecoPLUS

LINK 105/ecoPLUS™ retrieves fuel consumption information over the vehicle's OBD-II connector and sends this information to WEBFLEET in real time. LINK 105/ecoPLUS works together with the LINK 5xx/4xx using Bluetooth®.

Object

An object is the central entity in WEBFLEET. An object can be a vehicle like a car, truck or trailer. The vehicle or trailer is installed with a Webfleet Solutions unit. The Webfleet Solutions unit delivers all relevant vehicle/trailer-related information to WEBFLEET such as position, time, speed etc. The object is then shown on the map and in the respective lists in WEBFLEET. It is created in the WEBFLEET database as soon as it is activated after a successful installation.

Tracking and tracing

Tracking and tracing is the general term used for tracking the position of an object, either in real time or historically. Usually this includes functionality to communicate with vehicles and their drivers.

Tracking and tracing requires dedicated hardware and software. WEBFLEET uses both built-in and portable devices.

Built-in devices

24/7 monitoring and security is enabled by using built-in [LINK](#) devices.

The LINK device delivers position, movement and ignition information as well as input events, for example engine is running etc., related to the specific vehicle and cannot be switched off.

The LINK device normally sends six positions per minute as long as the vehicle is operated in countries covered by your WEBFLEET subscription. The countries and the position report interval vary per subscription. For details refer to the WEBFLEET contract. Using the application programming interface WEBFLEET.connect one position per minute is standard in these countries. You can extend the position report interval for WEBFLEET.connect integrations to more positions per minute by booking the Additional Service HD Tracking. Additional positions are then available in the 'surplus_data' result parameter as 'hd_trackingpositions' incl. geo coordinates, speed, course and time. For more details how to book this feature please refer to the Additional Service form.

A LINK device installed in the vehicle is required for additional devices such as the following:

- [Non-connected navigation devices](#)
- [Remote LINK](#)
- [LINK 105/ecoPLUS](#)
- Digital tachograph

For compatibility see www.webfleet.com.

These devices have basic functions like sending and accepting orders and messages, reporting working times, logbook-keeping, reporting on driver behaviour, driving times of driver and co-driver and fuel consumption.

Portable devices

Part-time tracking and tracing can be achieved with [Connected navigation devices](#) that directly communicate with WEBFLEET.

Tracking

Tracking is monitoring the position, movement, driving and other events of a vehicle in real time. The vehicle reports its current speed and the direction in which it is moving to WEBFLEET. Additionally you can see if a vehicle is stuck in a traffic jam, if it is parked and/or if it is idling the engine. This kind of information is available in WEBFLEET, for example on the map and in the vehicle details panel.

Tracing

Tracing is the ability to see the vehicles' positions, movements, driving and other events historically. The information is stored to WEBFLEET for up to 90 days, and can be evaluated during this time.

Trip

A trip is a movement of a vehicle from a start position to an end position.

After a trip has ended a trip report is sent to WEBFLEET containing all trip-relevant information such as start time, end time, stand stills, idling times, and fuel consumption.

Trip with LINK device

A trip start is reported when the vehicle's ignition is switched on and the vehicle moves or changes its GPS position for a minimum configured duration (default five min.), retroactive to vehicle ignition time.

The end of a trip is reported when one of the following conditions applies:

- The vehicle's ignition is switched off and remains so for a minimum configured duration (default 15 min.), and the vehicle does not move or change its GPS position.
- The logbook trip mode changes from private trip to business trip or vice versa.
- The driver changes, reported either through the Driver Terminal or the digital tachograph.

Trip with navigation device only

When using a connected navigation device, trips are reported under the following conditions:

The start of a trip is reported when all the following conditions apply to the navigation device:

- It is properly connected to the dock in the vehicle.
- It has GPS reception.
- It changes its GPS position.

The end of a trip is reported when one of the following conditions applies to the navigation device:

- It is removed from the dock.
- It has been switched off.
- It stands still for a minimum of ten minutes.
- The logbook mode has changed from business to private mode or vice versa.
- The driver changes, reported through the Driver Terminal (applicable for GO and PRO navigation devices with the software version 8.390.1916 or higher only).

Standstill

A standstill is reported when the vehicle stops moving or changing its GPS position for minimum configured duration (default five min.). The end of a stand still is determined when the vehicle starts moving or changing its GPS position. The complete standstill interval is reported to WEBFLEET when the standstill has ended.

Idle time

Idle time is the time a vehicle stands still with the engine running or the time the vehicle is moving very slowly. Idling is recorded after five minutes.

Event

Events are incidents recorded on the Driver Terminal that are reported as messages to WEBFLEET. Typical examples include the following:

- Predefined general status messages.
- Predefined order-related status messages.
- Being within geographical zones.
- Information on disconnection of peripherals, undesired functions, digital input events, etc.

Status messages and geo-zone events can be classified as notice, warning or alarm in three levels according to their importance.

Driving event

A driving event is reported to WEBFLEET when a driver exceeds a certain level of acceleration. Acceleration is recorded during braking, cornering and steering and exceptional acceleration, such as car crashes.

Order

An order is a message containing instructions about the job to be done. There are three types of orders:

- Delivery order.
- Pickup order.
- Service order.

An order contains an order number and a free text message up to 500 bytes.

Optionally, the following can be attached to an order:

- A contact.
- A phone number for the contact.
- The planned date of execution.
- A destination address to be displayed to the driver on the Driver Terminal.
- Destination coordinates to be used by the Driver Terminal for route calculation to the job location.
- The desired time of arrival.
- A time tolerance for the start of the execution to generate an alarm message if the tolerance is exceeded.
- A lead time for an arrival message.

The order instructions appear on the navigation device and can be accepted, rejected or simply saved for later. The (co-)driver can accept or refuse an order and start and complete activities on the order by using the corresponding order steps. If the driver rejects or cancels the order, he is asked to type in a reason.

All actions on the order taken by the driver generate messages sent to WEBFLEET.

Working time

Working time can be reported to WEBFLEET using:

- A connected navigation device; the driver can report working time, by identifying himself to the connected navigation device.
- A navigation device in combination with a LINK device; the driver can report working time, by identifying himself to the navigation device.
- A Remote LINK Working Time together with a LINK device; multiple employees can report working time via one installation, as they identify themselves through a personalised ID Key.

The following working time states can be reported to WEBFLEET:

- Commute to work.
- Start break.
- Start work, also indicates end of a break if the last reported status was start break.
- End work, also indicates end of a break if last reported status was start break.

Working time reporting across vehicles or devices

Generally, when reporting working time, the start and the end are performed on the same device, but if drivers and workers use various vehicles and thus devices, the following rules should be considered:

- If a driver moves between PRO navigation devices or Remote LINK devices working times are driver-oriented.
- If a driver moves between GO navigation devices, working times are vehicle-oriented.
- Working sessions have to be closed, with **End work**, before pairing any device with a different device.
- Closing working sessions on a different device than the one with which you have started the working session is only possible, if you use [Remote LINK](#) with an ID Key or PRO navigation devices.

Vehicle maintenance

Maintenance schedule

A maintenance schedule describes a maintenance task that has to be carried out on a vehicle. It defines when the task is scheduled and whether it has to be carried out once at a certain date or vehicle mileage, or if it needs to start at a certain date or vehicle mileage and be repeated at regular intervals.

In accordance with the maintenance schedule, WEBFLEET creates a maintenance task when the task is due. A reminder can also be issued a certain time or distance before the task is due, giving advanced notice of the maintenance task.

Maintenance task

A maintenance task for a vehicle is created from the respective maintenance schedule. The task appears in WEBFLEET when it is due or the task's reminder is issued.

Additional features

WEBFLEET comes with a large variety of features and functionality that help you drive your business out of the box. For industry specific needs Webfleet Solutions offers a range of additional features/additional services. These can be booked on top of your WEBFLEET subscription.

Important! Some of the following additional features/additional services may not be available in your country.

Programming Guide

This programming guide is an introduction to using the WEBFLEET.connect interface, how to access the service and how to interpret the output that is returned.

In order to access the WEBFLEET.connect service you need a WEBFLEET account that has WEBFLEET.connect enabled. Otherwise you will not be able to test the integration for your application.

Please talk to your Webfleet Solutions sales contact if you do not have access to a WEBFLEET.connect-enabled account.

Introduction to WEBFLEET.connect

WEBFLEET.connect is an API that allows you to access the WEBFLEET service through a web-enabled application. These are the primary features accessible through WEBFLEET.connect:

- **Reports** — Retrieve data that correspond to the information contained in the reports generated within WEBFLEET
- **Messaging** — Send text to mobile units and retrieve incoming messages.
See [Message queues](#) and [Orders](#).
- **Addresses** — Insert, update and delete addresses and address groups as well as relations between addresses and address groups.
See [Addresses](#).
- **Orders** — Insert, send, update and delete orders and retrieve order status information.
See [Orders](#).
- **Drivers** — Insert, update and delete drivers and retrieve driver status information.
See [Drivers](#).

Note: As WEBFLEET.connect impersonates as the user that is provided as part of the service request authentication, access restrictions set up within WEBFLEET apply. This affects all elements of the WEBFLEET.connect interface. For instance, addresses can only be updated if the user has the respective access right to do so (for example: "Edit access" for "All addresses").

Preparing for WEBFLEET.connect

WEBFLEET.connect can be made available to every customer with a valid WEBFLEET account. There should be at least one active object to make full use of the functionality offered by WEBFLEET.connect.

Access to WEBFLEET.connect with API Key

To enable API access for your application, obtain an API key by doing the following:

For .connect partners

If you are a .connect partner, you will receive your API key during your partner application process. To request more API keys, complete the online request form on <https://uk.support.webfleet.com/app/ask>.

- In the **Refine search by product model** drop-down menu select **Integration**, then select the desired API.
- In the **Refine search by category** drop-down menu select **API key request**.

For customers

If you are a customer and would like to request an API key, complete the online request form on <https://uk.support.webfleet.com/app/ask>.

- In the **Refine search by product model** drop-down menu select **Integration**, then select the desired API.
- In the **Refine search by category** drop-down menu select **API key request**.

Checking requirements

Geographic coordinates

Some functions require geographic coordinates such as longitude and latitude. This includes inserts and updates of addresses and sending orders.

Make sure that you are able to provide valid coordinates, otherwise you won't be able to fully leverage all functionality that WEBFLEET.connect offers. Geographic coordinates used by WEBFLEET always refer to the [WGS84](#) coordinate system and have different representations.

Creating a user and assigning rights using WEBFLEET

In order to access WEBFLEET.connect, you must first create a user within your WEBFLEET account and give this user the right to use WEBFLEET.connect.

This procedure is outlined below:

1. Select the **Users** icon in the main menu.



2. Click the **New user** button in the lower right.

The **New user** view opens.

3. In the **User data** section enter the user data.

Enter the user's name for **Name**, the WEBFLEET username for the new user under **Username**, and type in a contact email address in the field for **Email**.

Note: Name, Username and Email are required.

4. In the section for **Active time period**, select **Unlimited** or define a period by selecting **Temporary**, and then select a start date and an end date using the date picker.
5. Select a user profile in the **Profile** section.
A good starting point is to use the profile **Standard**.
Based on the user profile that you select, default settings for access rights are used for this user. You can adjust these settings in the following steps.
6. Select **WEBFLEET.connect** in the **Interfaces** section.
7. In the **System rights** section, select the user access rights regarding **Orders**, **Areas**, and **Reports**.
You can choose between **Full access**, **View access**, and **No access** for each module. For **Areas**, you can additionally choose the option **View access**, and for **Reports** the option **Download reports only** is available.
In the following sections you can refine the access rights to specific elements and features within WEBFLEET.
8. Click **Save** to save your changes.

Making requests to WEBFLEET.connect

Making HTTP requests

This section explains how to use [HTTP](#) to issue requests to WEBFLEET.connect.

Important: Only HTTPS requests are accepted. Requests using unencrypted HTTP are rejected.

WEBFLEET.connect generally uses HTTP GET requests as the underlying transport mechanism for requests (POST is supported for few actions only, see below). All requests are made using specific [URLs](#), passing parameter names and values as URL parameters. Responses are returned as character-separated values (CSV). You can experiment with WEBFLEET.connect-specific HTTPS requests by entering the request URL into the browser's address bar and submitting the request.

WEBFLEET.connect uses the standardized transport protocol HTTPS 1.1 for which compliance with [IETF RFC 2616](#) is very important. It includes proper evaluation and handling of all HTTP response header values, e.g. character set, content and transfer encoding including chunked transfer encoding.

The sequence of incoming messages may differ from the sequence of messages sent from the device. Use their timestamp to restore the sequence, if the sequence is significant for the application.

We highly recommend to use [ISO8601](#) for all date and time values even if its use is optional with some functions. Date and time values carry timezone information where appropriate.

Character sets and date/time values need translation to local configurations, for example. UTF-8 to ISO-8859-10, UTC to CET. We do not guarantee the character encoding (currently: UTF-8) and timezone (currently: UTC for queue service, else time zone of the account) of the web service response, as all information to properly convert this to local requirements is provided as per the above mentioned standards.

For details about time zones when using ISO8601 in CSV read [General parameters](#).

Do not use HTTP authentication, neither Basic nor Digest. HTTP authentication is not required by the service as username and password are included in the URL of the requests.

Do not pass parameters with an empty value in a request, if you do not explicitly want to delete the parameter's value.

Note: If the format of the HTTP request is not valid you will get a corresponding error.

The base URL

Every HTTP request to WEBFLEET.connect begins with constant elements for

- *host:*
`csv.webfleet.com`
- *path:*
`extern`

Therefore, the base URL with the https scheme used is:

<https://csv.webfleet.com/extern>

Handling the response

In case of an error, an error message is returned as plain text. The error message has the following layout:

```
id, description
```

`id` is a numeric value and `description` provides a reason text. The message is either in the language defined by the `lang` parameter or in English if no localised translation is available.

All methods that return data, provide the data as quoted character-separated values (CSV) with one record per line. Those methods' names typically contain verbs indicating data retrieval such as `show...` or `pop...`. The Quoting character is '`"`' - if this character is part of the data, it is quoted with `",` appearing as `""`. The ordering of result columns might not always match that of the documentation and is subject to change without notice. It is therefore advisable to use the column names returned in the first response line to identify the data columns by their name. If there is no data to return, an error message is returned, for example:

```
63, document is empty
```

All methods that transmit data, e.g. all `send...` methods, return nothing on successful completion, that is the response is empty.

Error codes and descriptions are also returned in two HTTP response header fields:

- X-WEBFLEET-Errorcode: `<Error code>`
- X-WEBFLEET-Errormessage: `<Error message>`

If there is no error, the header fields are omitted.

Making HTTP POST requests

In addition to GET you can use HTTP POST for the following actions only:

- [sendDestinationOrderExtern](#)
- [insertDestinationOrderExtern](#)
- [updateDestinationOrderExtern](#)

WEBFLEET.connect accepts POST requests with Content-Type "`application/x-www-form-urlencoded`". The parameters and values are transferred in the body of the request. The parameter name is separated from the value by `' = '` and name/value pairs are separated from each other by `' & '`. Special characters have to be encoded like query strings in URLs, see [RFC 1738 - Uniform Resource Locators \(URL\)](#).

The default character set is ISO-8859-1. To use UFT-8, you have to specify the character set in the HTTP header "Content-Type".

Example:

```
Content-Type: application/x-www-form-urlencoded; charset=utf-8
```

Code sample 3-1: Example of a complete POST request

```
POST/extern HTTP/1.1
Host:csv.webfleet.com
Connection:keep-alive
Content-Type:application/x-www-form-urlencoded; charset=UTF-8
Content-Length:177
lang=en&account=wfcdevaccount&username=wfcuser&password=yourpwd&apikey=y-
ourapikey&action=sendDestinationOrder&objectno=0094&orderid=it-
n32&ordertext=Clean%20streets&longitude=12399200&latitude=51364460&w-
p=51363230,12392520,Hamburger%20Str.%2012,1,1
```

Using JSON

To use JSON, add the additional parameter `outputformat=json` to the request URL. This will return JSON instead of CSV. All other parameters and functionality stays the same.

The field names in the JSON output are identical to the column names in the CSV format. The returned JSON is an array with a flat representation of the data, which is not grouped nor structured. But there is one exception from the "flat rule": The `surplus_data` member in the result of [popQueueMessagesExtern](#) is structured JSON.

Empty data is omitted in the result – no "null" members. JSON data types, such as string, number and boolean are used where applicable. If there is no data to return, an empty JSON array is returned.

The HTTP Content-Type is "*application/json; charset=UTF-8*".

Getting started with HTTP requests

For making HTTP requests, you only need a web browser.

Preconditions

- Up-to-date web browser, for example Chrome or Firefox.
- Valid API key and credentials.

Making an HTTP request with a browser

1. Simply type (or copy & paste) the full URL into the web browser address bar.

Here is a simple example URL that will geocode the specified location:

```
https://csv.webfleet.com/extern?lang=en&account=xxx&username=xxx&password=xxx&apikey=xxx&action=geocodeAddress&outputformat=json&freetext=Leipzig
```

Note: Please insert your credentials and API key before submitting.

2. Press **Enter** to submit the request.

Tip: The output format has been set to JSON. We recommend using the JSON format as output for these kinds of tests as this usually can be displayed inside the web browser as well.

The result output displayed in a web browser:

```

▼ 0:
    addrCity:          "Leipzig"
    addrCountry:       "DE"
    postText:          "Leipzig, Saxony, DE"
    formatted_longitude: "12°22'16.9\" E"
    formatted_latitude: "51°20'22.8\" N"
    longitude:         12371363
    latitude:          51339672
    additional_information: "score=1.0;type=city"

▼ 1:
    addrCity:          "Leipzig"
    addrCountry:       "US"
    postText:          "Leipzig, North Dakota, US"
    formatted_longitude: "101°49'09.3\" W"
    formatted_latitude: "46°30'57.8\" N"
    longitude:         -101819276
    latitude:          46516066
    additional_information: "score=0.931034505367279;type=city"

▼ 2:
    addrCity:          "Leipzig"
    addrCountry:       "CA"
    postText:          "Leipzig, Saskatchewan, CA"
    formatted_longitude: "108°40'50.1\" W"
    formatted_latitude: "52°10'59.4\" N"
    longitude:         -108680608
    latitude:          52183185
    additional_information: "score=0.9195402264595032;type=city"

```

HTTP request encoding

Every HTTP/HTTPS request must be a valid URL. That means that only [ASCII](#) characters are valid characters inside the URL and every other character, such as the German 'ß' character, or a special signs, such as the '@' sign, must be properly encoded inside the URL. There are two different types of encoding available depending on what kind of characters or special signs are needed.

Percent encoding

This is the basic version of character encoding. It contains only some special characters like for instance the 'ß' character (encoded as %DF) or the '@' sign (encoded as %40).

Find below an example that uses 'Sußanne@work' as WEBFLEET.connect user name and how the special characters and characters inside this user name are correctly percent encoded:

```
https://csv.webfleet.com/extern?lang=de&account=***&username=Su%DFanne
%40work&password=***&apikey=***&action=geocodeAddress&outputformat=json&freetext=Berlin
```

UTF-8 encoding

For more complex character encoding the UTF-8 encoding is needed as it contains nearly all characters and special signs.

Here is another example. For example, to geocode the Polish town 'Łódź' you have to enable the UTF-8 encoding in the request first by using the following extra parameter:

```
&useUTF8=true
```

All special characters and signs inside the URL must now be encoded using the UTF-8 format.

Here is how the URL should finally look like:

```
https://csv.webfleet.com/extern?lang=de&account=***&username=***&password=***&apikey=***&action=geocodeAddress&outputformat=json&useUTF8=true&freetext=%C5%81%C3%B3d%C5%BA
```

Please note that the word Łódź has been converted to the following UTF-8 encoded string:

```
%C5%81%C3%B3d%C5%BA
```

Making SOAP requests

This section explains how to use [SOAP](#) to issue requests to WEBFLEET.connect. In order to ensure transmission security, it is required to use HTTPS to access the service via SSL.

WEBFLEET.connect supports the SOAP message protocol for issuing requests over an HTTPS connection. The easiest way to use the SOAP interface with your application is to use a SOAP toolkit appropriate for your programming platform. SOAP toolkits are available for most popular languages and platforms.

The files describing the operations and the data types are available at <https://soap.webfleet.com/>. Most SOAP toolkits support the automatic generation of routines and classes based on the description.

WEBFLEET.connect uses the [MTOM](#) extension to SOAP in order to provide an optimised transmission of data. Although most modern SOAP toolkits support this extension, your specific toolkit might need an additional support library to enable proper handling of MTOM.

Using .NET with the WEBFLEET.connect SOAP API

If you are using the .NET to integrate with WEBFLEET.connect we recommend to using C# as the main programming language. If however you are forced to use Visual Basic this requires to apply the additional steps described in [Using WEBFLEET.connect SOAP with Visual Basic](#) before importing the web service references into your development project.

Enabling the MTOM encoding support in .NET

.NET 3.5 (and higher) and the underlying Windows Communication Framework support SOAP with the MTOM extension. If you create a default web service project in Visual studio, the MTOM support is not automatically enabled for a new project. To enable it edit the app.config file in your code project.

Rename every occurrence of the textMessageEncoding element to mtomMessageEncoding. See "before" and "after" samples below.

Note: Only rename the element. The attributes and their values **must not be removed**. Do not forget to **close and re-open the project** and **possibly Visual Studio** after this change, otherwise Visual Studio will not recognise the changes.

The following code samples show when MTOM encoding is supported.

Code sample 3-2: Example: Before (MTOM encoding NOT supported):

```

<textMessageEncoding maxReadPoolSize="64" maxWritePoolSize="16" messageVersion="Soap12" writeEncoding="utf-8">
<readerQuotas maxDepth="32" maxStringContentLength="8192" maxArrayLength="16384" maxBytesPerRead="4096" maxNameTableCharCount="16384" />
</textMessageEncoding>

```

Code sample 3-3: Example - After (MTOM encoding supported):

```

<mtomMessageEncoding maxReadPoolSize="64" maxWritePoolSize="16" messageVersion="Soap12" writeEncoding="utf-8">
<readerQuotas maxDepth="32" maxStringContentLength="8192" maxArrayLength="16384" maxBytesPerRead="4096" maxNameTableCharCount="16384" />
</mtomMessageEncoding>

```

Disabling MTOM

It's possible to enforce non-MTOM responses in the SOAP API. This allows to use the SOAP API also with frameworks or toolkits that don't support MTOM.

To ensure backward compatibility, the default response is still using MTOM. But you can disable MTOM per request by using one of these 2 methods:

- Append `/disable-mtom` to the URL of the SOAP service.
 - Add a SOAP header with name `disable-mtom` and value `true` to the request.
- The namespace is `http://connect.webfleet.tomtomwork.com/services`

Using URL appendix

For example, instead of using `https://soap.webfleet.com/addressService` use `https://soap.webfleet.com/addressService/disable-mtom` when calling the API.

C# example code snippet

```

...
var endpointAddressBuilder = new EndpointAddressBuilder(client.Endpoint.Address);
endpointAddressBuilder.Uri = new Uri(endpointAddressBuilder.Uri + "/disable-mtom");
client.Endpoint.Address = endpointAddressBuilder.ToEndpointAddress();
...

```

Using SOAP header

Example SOAP message

```

<soap:Envelope xmlns:soap="http://www.w3.org/2003/05/soap-envelope"
  xmlns:ser="http://connect.webfleet.tomtomwork.com/services">
  <soap:Header>
    <ser:disable-mtom>true</ser:disable-mtom>
  </soap:Header>
  <soap:Body>
    ... details omitted ...
  </soap:Body>
</soap:Envelope>

```

C# example code snippet

```

...
var endpointAddressBuilder = new EndpointAddressBuilder(client.Endpoint.Address);
endpointAddressBuilder.Headers.Add(AddressHeader.CreateAddressHeader("disable-mtom", "http://connect.webfleet.tomtomwork.com/services", true));
client.Endpoint.Address = endpointAddressBuilder.ToEndpointAddress();

```

...

Using time zones with SOAP requests

With SOAP requests indicate a time zone known to the SOAP service in the general parameters (`gParm`) `timeZone` element. All date time values returned by the output of a SOAP function call will use the time zone thus indicated. Time zones known to the SOAP web service are enumerated in `KnownTimeZones` (see [WSDL](#)). The general parameters (`gParm`) `timeZone` element does not influence the interpretation of date time input data. This means, if a date time value is sent in a SOAP request, the time zone information specified in this value will be used.

Getting started with SOAP requests

For making SOAP requests, you need a special tool.

We recommend using SoapUI (<https://www.soapui.org>), which also offers a basic open source version.


Preconditions

- SoapUI is installed.
- Valid WSDL URL or file.
- Valid [API key](#) and credentials.

Making a SOAP request with SoapUI

To make a SOAP request, do the following:



1. Create an empty project.
2. Right-click on the project
3. Click **Add WSDL**.

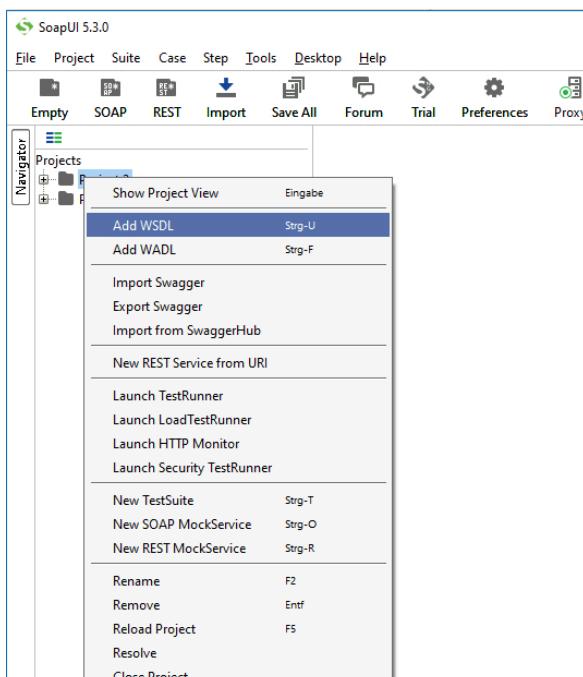

The **Add WSDL** dialogue opens.


4. Enter a valid WSDL URL that points to a WEBFLEET.connect SOAP service.
All available actions for this SOAP service are displayed.

Example: https://soap.webfleet.com/v1.33/objectsAndPeopleReportingService?wsdl

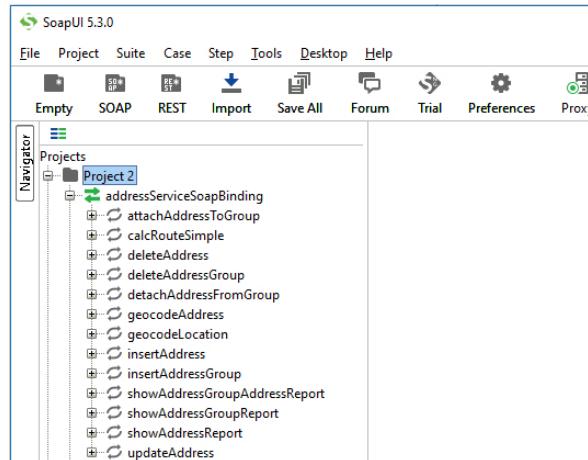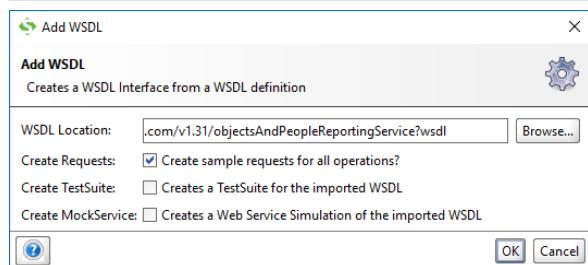


5. Click to select an action, for example **geocodeAddress**.
6. Create a new SOAP request.

The request window opens.

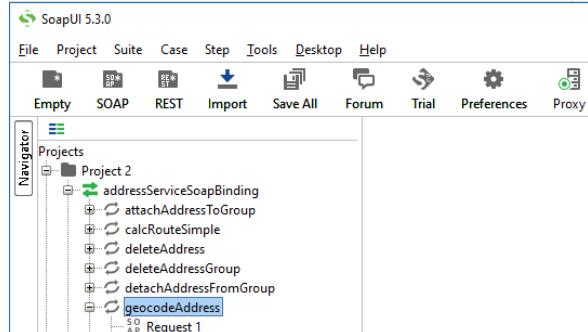

7. Enter all required parameters.
8. Click the submit button.

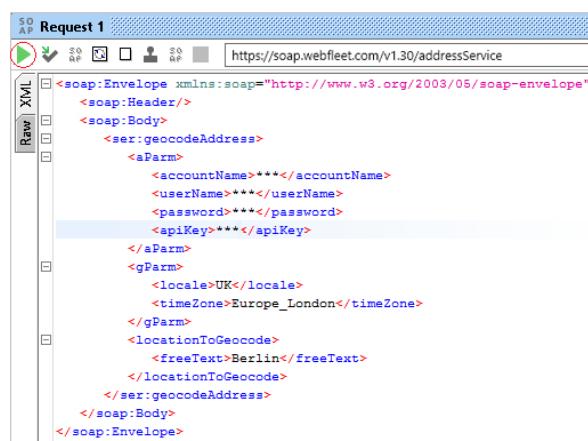

Here is the result for the example SOAP request:

```

<soap:Envelope xmlns:soap="http://www.w3.org/2003/05/soap-envelope">
  <soap:Body>
    <ns3:geocodeAddressResponse xmlns:ns3="http://www.w3.org/2001/XMLSchema-instance" xmlns:ns4="http://www.w3.org/2003/05/soap-envelope">
      <return>
        <statusCode></statusCode>
        <statusMessage>The operation *geocodeAddress* processed successfully.</statusMessage>
        <errors xsi:nil="true"/>
        <resultSize></resultSize>
        <results>
          <resultItem xsi:type="ns4:CompleteLocationWithAdditionalInformation" xmlns:ns4="http://www.w3.org/2003/05/soap-envelope">
            <street xsi:nil="true"/>
            <postcode xsi:nil="true"/>
            <city xsi:nil="true"/>
            <country>Germany</country>
            <geoPosition>
              <latitude>52523404</latitude>
              <longitude>13411400</longitude>
              <mapcode xsi:nil="true"/>
              <latitudeHumanReadable>52°31'24.2" N</latitudeHumanReadable>
              <longitudeHumanReadable>13°24'41.0" E</longitudeHumanReadable>
            </geoPosition>
            <streetNumber xsi:nil="true"/>
            <positionText>Berlin, DE</positionText>
            <additionalInformation key="score" value="1.0"/>
            <additionalInformation key="type" value="state"/>
            <countryCode>DE</countryCode>
          </resultItem>
        </results>
      </return>
    </ns3:geocodeAddressResponse>
  </soap:Body>
</soap:Envelope>

```

SOAP parameters

The WEBFLEET.connect SOAP parameters and values slightly differ from the parameters and values that are used in the CSV/JSON interface. All valid SOAP parameters and values can always be found in the WSDL of the corresponding WEBFLEET.connect SOAP service.

The WSDLs for all our WEBFLEET.connect SOAP services can be found on <https://soap.webfleet.com/>

The following table shows some examples of what can differ between SOAP and JSON/CSV.

Table: Differences between SOAP and JSON/CSV

	SOAP example	CSV/JSON example
Spelling of parameters	apiKey	apikey
Parameter names	accountName	account
Parameter structure	<code><object objectNo="xxx"/></code>	objectno=xxx
Parameter values	<code><msgClass filter="ALL"/></code>	msgclass=0
Parameter structure and values	<code><gParm></code> <code><locale>UK</locale> <timeZone>Europe_London</timeZone></code> <code></gParm></code>	lang=en

Another good example of different parameter values between the SOAP and the CSV/JSON interface are the SOAP date range parameter values. Find below the parameter values that can be found in the WSDL of the WEBFLEET.connect SOAP service.

Example: SOAP date range parameters in the WSDL

```

<xss:simpleType name="DateRangePattern">
  <xss:restriction base="xs:string">
    <xss:enumeration value="UD"/>
    <xss:enumeration value="D0"/>
    <xss:enumeration value="Dm1"/>
    <xss:enumeration value="Dm2"/>
    <xss:enumeration value="Dm3"/>
    <xss:enumeration value="Dm4"/>
    <xss:enumeration value="Dm5"/>
    <xss:enumeration value="Dm6"/>
  </xss:restriction>
</xss:simpleType>

```

```

<xs:enumeration value="W0"/>
<xs:enumeration value="Wm1"/>
<xs:enumeration value="Wm2"/>
<xs:enumeration value="Wm3"/>
<xs:enumeration value="WF0"/>
<xs:enumeration value="WFm1"/>
<xs:enumeration value="WFm2"/>
<xs:enumeration value="WFm3"/>
<xs:enumeration value="M0"/>
<xs:enumeration value="Mm1"/>
<xs:enumeration value="Mm2"/>
<xs:enumeration value="Mm3"/>
<xs:enumeration value="Mm4"/>
<xs:enumeration value="Mm5"/>
<xs:enumeration value="Mm6"/>
<xs:enumeration value="Mm7"/>
<xs:enumeration value="Mm8"/>
<xs:enumeration value="Mm9"/>
<xs:enumeration value="Y0"/>
<xs:enumeration value="Ym1"/>
<xs:enumeration value="Ym2"/>
<xs:enumeration value="Ym3"/>
<xs:enumeration value="Ym4"/>
<xs:enumeration value="Ym5"/>
<xs:enumeration value="Ym6"/>
<xs:enumeration value="Ym7"/>
<xs:enumeration value="Ym8"/>
<xs:enumeration value="Ym9"/>
</xs:restriction>
</xs:simpleType>

```

The following table provides a detailed description for every SOAP date range parameter value. They correspond to the CSV/JSON date range filter parameters too.

Table: SOAP date range parameter value descriptions

Parameter	Description
UD	User-defined range
D0	Today
Dm1	Yesterday
Dm2	Two days ago
Dm3	Three days ago
Dm4	Four days ago
Dm5	Five days ago
Dm6	Six days ago
W0	Current week
Wm1	Last week
Wm2	Two weeks ago

Parameter	Description
Wm3	Three weeks ago
WF0	Floating week, current day and previous seven days
WFm1	Floating week, the seven calendar days before WF0
WFm2	Floating week, the seven calendar days before WFm1
WFm3	Floating week, the seven calendar days before WFm2
M0	Current month
Mm1	Last month
Mm2	Two months ago
Mm3	Three months ago
Mm4	Four months ago
Mm5	Five months ago
Mm6	Six months ago
Mm7	Seven months ago
Mm8	Eight months ago
Mm9	Nine months ago
Y0	Current year
Ym1	Last year
Ym2	Two years ago
Ym3	Three years ago
Ym4	Four years ago
Ym5	Five years ago
Ym6	Six years ago
Ym7	Seven years ago
Ym8	Eight years ago
Ym9	Nine years ago

Request limits

The number of requests that can be issued is limited. If the number of requests executed exceeds this limit, WEBFLEET.connect will return an error message and not process requests again until there were no further requests within the limit monitoring interval. Limits are defined by a maximum number of requests al-

lowed in a certain time period. For more information about request limits, read the chapter for the function you want to use.

Extensions of limits are available upon request on a case by case basis, but require a certain period of proper client operation within the existing limits set.

Should an application using WEBFLEET.connect cause too much load on the system, the limit may be reduced at any time without prior notice and eventually access to WEBFLEET.connect might be revoked completely if the problems are not fixed within a reasonable amount of time.

Common parameters

WEBFLEET.connect requests take a variety of parameters.

Find the parameters that are required on all requests below:

- [Authentication parameters](#)
- [General parameters](#)

Find the parameters that are not required but are shared between various requests below:

- [Date range filter parameters](#)

Authentication parameters

Parameter	Type	Description
account	string	A valid account name.
username	string	Username within the account that is allowed to access the service.
password	string	Password for the user name.
sessiontoken	string (32)	A session identifier, that has been fetched from the server using createSession . sessiontoken can be used as an alternative to account, username or password to authorise further requests for a limited time (see session lifetime).
apikey	string (36 characters)	This value is optional.

General parameters

Parameter	Type	Description
separator (CSV only)	positiveInteger	<p>A delimiter character identifier that indicates the delimiter to be used for the output columns:</p> <ul style="list-style-type: none">• 1 - a <i>tab</i> character• 2 - a <i>space</i> character• 3 - a <i>comma</i> character <p>If no value is specified, a semicolon used to as the delimiter for the output columns.</p> <p>This parameter is optional.</p>

Parameter	Type	Description
lang (CSV only)	string	<p>Valid values are:</p> <ul style="list-style-type: none"> • de - German • en - English <p>Language to be used for output formatting. Expressed as a two-letter language code. The list of available languages is subject to change. Please ask your support contact if you want to use other values than those mentioned here.</p>
locale (SOAP only)	enum	<p>The value specified in the general parameters element (genPam) locale determines how the the result of a SOAP request will be localised.</p> <p>For locales known to the SOAP web service see WSDL.</p>
action (CSV only)	string	<p>Specifies the operation to be executed. See chapter Reference for a list of available operations and more information.</p>
useISO8601 (CSV only)	boolean	<p>If set to true, all date/time-relevant parameters are expected to be ISO8601-formatted and all date/time result fields will be ISO8601-formatted. See the ISO8601 specification or learn more here. The preferred ISO 8601 compliant notation for strings that represent dates which are to be passed to WEBFLEET.connect is the compact full notation with dashes and colons, optional milliseconds and time zone, for example:</p> <p>yyyy-MMdd'T'hh:mm:ss[.(.)S](((+ -)hh:mm) Z)</p> <p><i>Example: 2007-02-02T12:12:12.500+01:00</i></p> <p>If set to <code>true</code>, the result will return date time values in UTC. If set to <code>false</code>, the result returns the time zone configured in the specific WEBFLEET account.</p>
columnfilter (CSV only)	string	<p>This parameter reduces the result of a request to the specified columns. The possible values for this parameter are column names that can be returned by the function. If <code>columnfilter</code> is not specified, is empty or contains only invalid column names, then the full data set requested by the function is returned. The requested column names are case-sensitive and must be indicated correctly. Multiple column names must be separated with commas. Misspelled column names are disregarded in the resulting data set with no error notification.</p>
timeZone (SOAP only)	enum	<p>The value specified in the general parameters element (genPam) timeZone defines the time zone to which date and time related result data of the SOAP request will be matched.</p> <p>For valid values see WSDL.</p>
useUTF8 (CSV only)	boolean	<p>Controls how WF.connect interprets the character encoding of URL request parameters.</p> <p>If set to <code>true</code>, all parameters are expected to be UTF-8-encoded.</p> <p>If set to <code>false</code>, all parameters are interpreted as ISO-8859-1. Default is <code>false</code>.</p>

Parameter	Type	Description
outputformat (CSV only)	string	<p>Defines the response format to be used by WEBFLEET.connect.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • csv (default) • json

Date range filter parameters

Parameter	Type	Description
range_pattern	string	<p>Specifies a relative date range for the data to be returned.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • d0 — Today • d-1 — Yesterday • d-2 — Two days ago • d-3 — Three days ago • d-4 — Four days ago • d-5 — Five days ago • d-6 — Six days ago • w0 — Current week • w-1 — Last week • w-2 — Two weeks ago • w-3 — Three weeks ago • wf0 — Floating week, current day and previous seven days • wf-1 — Floating week, the seven calendar days before wf0 • wf-2 — Floating week, the seven calendar days before wf-1 • wf-3 — Floating week, the seven calendar days before wf-2 • m0 — Current month • m-1 — Last month • m-2 — Two months ago • m-3 — Three months ago • ud — User-defined range

Note: Use of this parameter rules out the usage of `rangefrom_string` and `rangeto_string` and vice versa except for `range_pattern=ud`.

Requires `rangefrom_string` and `rangeto_string` to be present.

Parameter	Type	Description
rangefrom_string	string	<p>Lower bound for a date range (start date). The required format depends on the value for the lang parameter:</p> <ul style="list-style-type: none"> • lang = de <i>Format: dd.MM.yyyy HH:mm:ss</i> <hr/> <p><i>Example: 13.07.2007 23:59:59</i></p> <hr/> <ul style="list-style-type: none"> • lang = en <i>Format: dd/MM/yyyy HH:mm:ss</i> <hr/> <p><i>Example: 13/07/2007 23:59:59</i></p> <hr/> <ul style="list-style-type: none"> • lang = nl <i>Format: d-M-yyyy H:mm:ss</i> <hr/> <p><i>Example: 13-07-2007 23:59:59</i></p>
rangeto_string	string	Upper bound for a date range (end date).
year	nonNegativeInteger(4)	<p>A range that covers the entire year, from 1st of January 00:00:00 o'clock to 31st of December 23:59:59 o'clock. Can be used as an alternative to <code>range_pattern</code>, <code>rangefrom_string</code>, <code>rangeto_string</code>.</p>
month	nonNegativeInteger(2)	<p>A range that covers the entire month that is indicated from first day 00:00:00 o'clock to last day 23:59:59 o'clock of the same month.</p> <p>Note: This parameter has to be used together with <code>year</code>.</p> <p>Can be used as an alternative to <code>range_pattern</code>, <code>rangefrom_string</code>, <code>rangeto_string</code>.</p>
day	nonNegativeInteger(2)	<p>A range that covers the entire day that is indicated from 00:00:00 o'clock to 23:59:59 o'clock.</p> <p>Note: This parameter has to be used together with <code>year</code> and <code>month</code>.</p>

Reference

Message queues

Overview of queues

An alternative way to collect data is offered via the message queues. All messages received by WEBFLEET are made available via message queues that can be accessed using a message queue. A message queue is a temporary repository for all messages associated with that subscription's filter condition (message class). Once a message has been retrieved from a queue by using [popQueueMessagesExtern](#) and subsequently acknowledged by using [ackQueueMessagesExtern](#), the message is deleted from that queue and no longer available.

In order to prevent the message queues from overflowing, messages are stored a limited amount of time (time to live, TTL) and are automatically deleted once the TTL has expired, even if they have not been retrieved. The default TTL is set to 14 days.

The following points are a violation of the intended use of WEBFLEET.connect queues:

- Repeatedly creating queues and then leaving them inactive.
- Repeatedly calling [popQueueMessagesExtern](#) without subsequently calling [ackQueueMessagesExtern](#).

Note: Queues that have not been used for 30 consecutive days may be removed without prior notice.

Outbound messages

Outbound messages in the text and order messages classes are available in the message queue system. Consider that outbound messages in the message queue provide a reduced data set, e.g. no position or odometer information. Outbound messages that are in the queue already have not necessarily been delivered to the device.

createQueueExtern

Description

Creates a new queue.

A queue is always bound to the user creating it and collects messages matching the message class provided.

Technical details

SOAP endpoint address / function name messagesService#createQueueExtern

Request limits	10 requests / 24 hours
----------------	------------------------

Parameters

createQueueExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to createQueueExtern

Parameter	Type	Description
msgclass	nonNegativeInteger	<p>Valid values are:</p> <ul style="list-style-type: none"> • 0 - All messages Includes tracking-only messages and 4,5,7,8 • 2 - All except position messages Includes 4,5,7,8, does not include tracking-only messages. • 4 - Order related messages • 5 - Driver related messages • 7 - Status messages • 8 - Text messages • 15 - Third party messages (LINK.connect, ...)

Result

Result for createQueueExtern:

Parameter	Type	Description
action	string	The name of the operation that has been executed.
result	boolean	Always <code>true</code> , errors will be reported using the standard error reporting mechanism.

deleteQueueExtern

Description

Deletes an existing queue.

Technical details

SOAP endpoint address / function name messagesService#deleteQueueExtern

Request limits	10 requests / 24 hours
----------------	------------------------

Parameters

deleteQueueExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to deleteQueueExtern:

Parameter	Type	Description
msgclass	nonNegativeInteger	<p>Valid values are:</p> <ul style="list-style-type: none"> • 0 - All messages Includes tracking-only messages and 4,5,7,8. • 2 - All except position messages Includes 4,5,7,8, does not include tracking-only messages. • 4 - Order related messages • 5 - Driver related messages • 7 - Status messages • 8 - Text messages • 15 - Third party messages (LINK.connect, ...)

Result

Result for createQueueExtern:

Parameter	Type	Description
action	string	The name of the operation that has been executed.
result	boolean	<p>Always <code>true</code>.</p> <p>Errors will be reported using the standard error reporting mechanism.</p>

popQueueMessagesExtern

Description

Retrieves outstanding messages for a given subscription. This includes most important and most often occurring inbound and outbound messages.

Before using `popQueueMessagesExtern` to retrieve outstanding messages, you need to create a queue using [createQueueExtern](#) using the same `message class` parameter that you are going to provide with calls to `popQueueMessagesExtern`.

Once you have successfully processed (and stored) all of the retrieved messages, you need to use [ack-QueueMessagesExtern](#) to acknowledge completion of the message transfer to your application. Otherwise, the messages will be kept and returned again during the next call to `popQueueMessagesExtern`. Calls to `popQueueMessagesExtern` and `ackQueueMessagesExtern` must be serialised.

In order to prevent your system from being flooded with oversized responses, the number of messages that will be returned on a single response is limited to 500. This limit can be adjusted per account on request.

The resulting data set is delivered in the language you have chosen in the WEBFLEET account and not on the language you have indicated in the `lang` parameter.

Technical details

SOAP endpoint address / function name `messagesService#popQueueMessagesExtern`

Request limits	10 requests / minute
----------------	----------------------

Parameters

popQueueMessagesExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to popQueueMessagesExtern

Parameter	Type	Description
msgclass	nonNegativeInteger	Valid values: <ul style="list-style-type: none">• 0 - All messages Includes tracking-only messages and 4,5,7,8.• 2 - All except position messages Includes 4,5,7,8, does not include tracking-only messages.• 4 - Order related messages• 5 - Driver related messages• 7 - Status messages• 8 - Text messages• 15 - Third party messages (LINK.connect, ...)

Result

Result for popQueueMessagesExtern

Parameter	Type	Description
msgid	string	msgid identifies a message and is system wide unique. Valid value range: $0 \leq \text{msgid} \leq 2^{64}-1$.
msg_time	dateTime	ISO 8601-formatted date and time in the UTC timezone, combined representation in the extended format. <i>Example: 2007-12-24T16:00:00Z</i>
msg_class	nonNegativeInteger	Valid values: <ul style="list-style-type: none">• 0 - unknown• 1 - system• 2 - text• 3 - polling• 4 - timer event• 5 - GPS event• 6 - input event• 7 - set output• 8 - data• 9 - configuration• 10 - trip• 11 - order

Parameter	Type	Description
msg_type	nonNegativeInteger	A 8 or 9 digit number representing class and type of the message. Counted from right to left, digits 0-3 indicate the message type, digits 4-6 are reserved and digits 7 and 8 indicate the message class. The message class is equal to the field <code>msg_class</code> . For a comprehensive list of possible message types see Messages types .
msg_text	string	The actual text of the message.
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
driverno	string	Identifying number of a driver. Unique within an account. See Drivers to learn more about drivers.
ign	int	
inputs	string	This property is deprecated. Please use <code>ioname</code> in <code>surplus_data</code> instead of <code>inputs</code> .
odometer	int	
outputs	string	
pndconn	boolean	Indicates the connection state of the Driver Terminal.
trip_mode	nonNegativeInteger	Valid values: <ul style="list-style-type: none">• 0 - Unknown trip type• 1 - Private trip• 2 - Business trip• 3 - Commute trip• 4 - Correction trip (user changed the odometer value manually)
pos_latitude	int	Geographic latitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd).
pos_longitude	int	Geographic longitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd).
pos_text	string	
pos_country	string (2)	ISO 3166-1 alpha-2 code for the country (capital letters).
pos_postcode	string	

Parameter	Type	Description
pos_params	string	<p>A list name-value pairs that describe the position. Name and value are separated by "=", pairs are separated by ";".</p> <p>Valid values:</p> <ul style="list-style-type: none"> • city • country • direction • distance • highway_exit • highway_intersection • name1 • name2 • name3 • street • text • town1_country • town1_name • town1_part • town1_zip • town2_country • town2_name • town2_zip • zip
		<p>Note: The result does not always contain all position parameters.</p>
		<p><i>Example:</i> street=B2 Maximilianallee; town1_zip=04129; showzip=1; town1_name=Leipzig;</p>
pos_time	dateTime	<p>ISO 8601-formatted date and time in the UTC timezone, combined representation in the extended format.</p>
		<p><i>Example:</i> 2007-12-24T16:00:00Z</p>
pos_addrno	string (10)	<p>Refers to the nearest address if the position is within the address radius.</p> <p>See Addresses to learn more.</p>
speed	int	in km/h
course	nonNegativeInteger	Compass direction in degrees (0° ... 360°):

Parameter	Type	Description
status	string	<p>GPS status indicator.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • L - No fix available. Position data refer to the last known position. • V - No fix data available. • A - Sufficient quality for a valid fix.
direction	nonNegativeInteger	<p>Cardinal and intercardinal compass directions, derived from course.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 1 - North • 2 - Northeast • 3 - East • 4 - Southeast • 5 - South • 6 - Southwest • 7 - West • 8 - Northwest
orderno	string (20)	<p>Account-unique order id, case-sensitive.</p> <p>Maximum capacity is 20 bytes, actual number of characters depends on the byte count consumed by the UTF-8 encoding of those characters.</p> <p>See Orders to learn more about orders.</p>

Parameter	Type	Description
order_state	nonNegativeInteger	<p>Valid values:</p> <ul style="list-style-type: none"> • 0 - Not yet sent • 100 - Sent • 101 - Received • 102 - Read • 103 - Accepted • 201 - Service order started • 202 - Arrived at destination • 203 - Work started • 204 - Work finished • 205 - Departed from destination • 221 - Pickup order started • 222 - Arrived at pick up location • 223 - Pick up started • 224 - Pick up finished • 225 - Departed from pick up location • 241 - Delivery order started • 242 - Arrived at delivery location • 243 - Delivery started • 244 - Delivery finished • 245 - Departed from delivery location • 298 - Resumed • 299 - Suspended • 301 - Cancelled • 302 - Rejected • 401 - Finished
order_type	nonNegativeInteger	<p>Type of order.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 1 - service order • 2 - pickup order • 3 - delivery order
dest_latitude	int	<p>Geographic latitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd).</p>
dest_longitude	int	<p>Geographic longitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd).</p>
dest_text	string	
eta	dateTime	<p>ISO 8601-formatted date and time in the UTC timezone, combined representation in the extended format.</p> <p><i>Example: 2007-12-24T16:00:00Z</i></p>

Parameter	Type	Description
distance	nonNegativeInteger	Distance to destination (in meters)
user_status	int	The number of a predefined status message or a predefined order message.
user_text	String (60)	An additional text that refers to a predefined status message or a predefined order message.
dt_cardid	string (18)	<p>A driver card id as used with the Digital Tachograph, prefixed with the ISO 3166-1 alpha-2 code for the country (capital letters).</p> <p>Contains the card id for driver cards that are not assigned to a driver or for any other card type.</p> <p>Only available on card insertion and removal messages.</p>
dt_cardaction	int	<p>Valid values:</p> <ul style="list-style-type: none"> • 0 - inserted • 1 - removed
dt_cardtype	nonNegativeInteger	<p>Valid values:</p> <ul style="list-style-type: none"> • 0 - Unknown • 1 - Driver card • 2 - Workshop card • 3 - Control card • 4 - Company card
dt_slot	nonNegativeInteger	<p>Valid values:</p> <ul style="list-style-type: none"> • 1 - Driver • 2 - Co-Driver
dt_state	int	<p>Valid values:</p> <ul style="list-style-type: none"> • 0 - connected • 1 - disconnected
workstate	nonNegativeInteger	<p>Valid values:</p> <ul style="list-style-type: none"> • 0 - Unknown • 1 - Free time (PND only) • 2 - Pause (PND and digital tachograph) • 3 - Standby (digital tachograph only) • 4 - Working (PND only) • 5 - Driving (digital tachograph only) • 6 - Other work (digital tachograph only)

Parameter	Type	Description
source_device	string	<p>The external equipment this message originated from:</p> <ul style="list-style-type: none"> • 0 - Driver Terminal • 1 - Digital tachograph • 2 - Remote LINK Working Time • 3 - Remote LINK Logbook • 4 - ecoPLUS • 6 - LINK 105 • 11 - PRO 2020
rll_btaddress	string (17)	<p>Remote LINK Bluetooth address.</p> <p>The IEEE 802 MAC-48/EUI-48 address of a Bluetooth device, formatted as six groups of two hexadecimal digits, separated by colons (:).</p> <p><i>Example: 00:13:6C:88:26:0B</i></p>
rll_buttonid	string (16)	Remote LINK/ID key identifier
surplus_data	string	<p>A JSON-encoded string that carries additional data items that augment certain messages.</p> <ul style="list-style-type: none"> • dt_timeoffset: time difference between event_time and the Digital Tachograph's internal clock, in milliseconds. • ep_paireddata: ecoPLUS initiating message, containing parameters specific to ep_paireddata. • ep_tripdata: Additional trip information reported by ecoPLUS, containing parameters specific to ep_tripdata. • ep_snapshotdata: ecoPLUS update recording, containing parameters specific to ep_snapshotdata. • invalid_waypoints: An array of the numbers of the waypoints that are not valid for a route calculation on a Driver Terminal. • fms_snapshotdata: FMS live data, containing parameters specific to fms_snapshotdata. • fms_fuel_difference: Additional data for fuel level increase/decrease messages, containing parameters specific to fms_fuel_difference. • fms_tripdata: Additional trip information reported by FMS, containing parameters specific to fms_tripdata. • acc_events: additional details on acceleration events, containing parameters specific to acc_events.
Note: This parameter is not available by default. Please contact Customer Support to activate it. Additional cost will apply.		

Parameter	Type	Description
		<ul style="list-style-type: none"> aux_device_data_in: information about third party Bluetooth device (LINK.connect), containing parameters specific to aux_device_data_in. aux_device_data_quota: information about allowed and used quota (LINK.connect), containing parameters specific to aux_device_data_quota. aux_device_data_out_status: status of sent messages (LINK.connect), containing parameters specific to aux_device_data_out_status.
		<ul style="list-style-type: none"> aux_device_data_reference: identifiers for outgoing and incoming messages (LINK.connect), containing parameters specific to aux_device_data_reference. troublecodes: Information about diagnostic trouble codes. See parameters specific to troublecodes.
		<ul style="list-style-type: none"> app_data_in: information about application (small binary message) data, containing parameters specific to app_data_in. app_data_quota: information about allowed and used quota, containing parameters specific to app_data_quota. app_data_out_status: status of sent small binary messages, containing parameters specific to app_data_out_status. app_data_reference: identifiers for outgoing and incoming small binary messages, containing parameters specific to app_data_reference. er_tripdata: Additional trip information reported by eco reporting, containing parameters specific to er_tripdata. ioname: input/output name, for example the name of a digital input. This element is appended if an input/output was switched to ON or OFF. msg_type gives information about switch type.
event_time	dateTime	<p>ISO 8601-formatted date and time in the UTC timezone, combined representation in the extended format.</p> <p><i>Example: 2007-12-24T16:00:00Z</i></p> <p>Contains local time of the device on which the event occurred and/or the time the message was generated.</p>
start_time	string	The time recorded when this event started.
start_latitude	int	<p>Geographic latitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd). Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer. See Geographic coordinate conversion on Wikipedia.</p>

Parameter	Type	Description
start_longitude	int	<p>Geographic longitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
start_odometer	int	The odometer reading when this event started.
end_time	string	The time recorded when this event ended.
end_latitude	int	<p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
end_longitude	int	<p>Geographic longitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
end_odometer	int	The odometer reading when this event ended.
trip_type	string	<p>Valid values:</p> <ul style="list-style-type: none"> • G - trip (vehicle changed GPS position) • S - standstill
order_addrno	string (10)	The address number of the order destination, if available.
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated.</p> <p>Can be used alternatively to <code>objectno</code>.</p>
driveruid	string	<p>A unique, unchangeable identifier for the indicated driver, automatically generated.</p> <p>Can be used alternatively to <code>driverno</code>.</p>
driverkey_deviceaddress	string	Address of the driver key reading device which is associated with the vehicle.
driverkey	string	Composed by driver key type and driver key value.

Parameter	Type	Description
location_params	string	<p>This parameter is currently tested. It will become part of the new reverse geocoder that we use internally.</p> <p>Name and value are separated by '='. Pairs are separated by ';'. Possible names are:</p> <ul style="list-style-type: none"> • countryCode • countryName • adminLevel1Code • adminLevel1Name • adminLevel2Name • adminLevel3Name • adminLevel4Name • adminLevel5Name • locality • subLocality1 • subLocality2 • cityBlock • namedArea • neighbourHood • street • route • postalCode • extendedPostalCode • houseNumber • roadNumbers • speedLimit • roadUse <p>Please note that the result does not always contain all position parameters. The parameter names are subject to modification.</p> <hr/> <p>Example: countryCode=DE;countryName=Deutschland;adminLevel1Code=SN; adminLevel1Name=Sachsen;locality=Leipzig;subLocality1=Zentrum-Ost; street=Inselstraße;postalCode=04103;houseNumber=22;speedLimit=30;roadUse=LocalStreet;</p> <hr/>

ackQueueMessagesExtern

Description

Acknowledges outstanding messages retrieved with a previous call to [popQueueMessagesExtern](#).

Technical details

SOAP endpoint address / function name messagesService#ackQueueMessagesExtern

Request limits	10 requests / minute
----------------	----------------------

Parameters

ackQueueMessagesExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to ackQueueMessagesExtern:

Parameter	Type	Description
msgclass	nonNegativeInteger	<p>Valid values:</p> <ul style="list-style-type: none"> • 0 - All messages Includes tracking-only messages and 4,5,7,8. • 2 - All except position messages Includes 4,5,7,8, does not include tracking-only messages. • 4 - Order related messages • 5 - Driver related messages • 7 - Status messages • 8 - Text messages • 15 - Third party messages (LINK.connect, ...)

Result

Result for ackQueueMessagesExtern:

Parameter	Type	Description
action	string	The name of the operation that has been executed.
result	boolean	Always <code>true</code> . Errors will be reported using the standard error reporting mechanism.
acknowledgedMessages	nonNegativeInteger	This value is a pointer value that does not always represent the actually acknowledged messages.
Note: This value is used for internal purposes only.		
outstandingMessages	nonNegativeInteger	An estimate for the number of messages that are still waiting in the queue.

Message types

msg_type	Available in message queue	Description
10000110	0, 2	Async command completion successful (outbound)
10000111	0, 2	Async command completion failed (outbound)
20000100	0, 2, 8	Sent text message (outbound)
20000101	0, 2, 8	Incoming text message
20000103	0, 2, 8	All messages deleted (outbound)
21100100	0, 2, 8	Sent text message (outbound)
21100101	0, 2, 8	Incoming text message
30000200	0, 2	Position query
31100200	0, 2	Position query
31100202	0, 2	Position reply - error
40000220	0, 2	Position message
40000230	0, 2	Distance message
41100300	0, 2	Position message
41100310	0, 2	Position/total position number
41100320	0, 2	Position message
41100330	0, 2	Distance message
41100340	0, 2	Position message
41100350	0, 2	Position/total position number
41100351	0, 2	Position message - empty
41100353	0, 2	Tracking data indicating the number of positions delivered
50000420	0, 2	Standstill begin
50000421	0, 2	Standstill end
50000424	0, 2	Standstill end - indicating the duration of the standstill event
51100420	0, 2	Standstill begin
51100421	0, 2	Standstill end

Message types

msg_type	Available in message queue	Description
51100426	0, 2	Movement violation
51100427	0, 2	Position lock alarm
60000510	0, 2	Ignition on
60000511	0, 2	Ignition off
60000520	0, 2, 7	Unit switched on
60000521	0, 2, 7	Unit switched off
60000545	0, 2, 7	Input switched on
60000546	0, 2, 7	Input switched off
60000547	0, 2, 7	GPS antenna connected (specific to LINK 300/310)
60000548	0, 2, 7	GPS antenna disconnected (specific to LINK 300/310)
60000551	0, 2, 7	External GSM antenna connected (specific to LINK 510)
60000552	0, 2, 7	External GSM antenna disconnected/not connected (specific to LINK 510)
60000553	0, 2, 7	External GSM antenna error/defective/does not comply with technical requirements from Webfleet Solutions
60000831	0, 2, 7	PTO (input) switched on
60000832	0, 2, 7	PTO (input) switched off
61100510	0, 2	Ignition on
61100511	0, 2	Ignition off
61100512	0, 2, 7	Trip data
61100530	0, 2, 7	Power connected
61100531	0, 2, 7	GPS antenna failure
61100532	0, 2, 7	Power disconnected
61100540	0, 2, 7	Input signal changed
61100542	0, 2, 7	Operating data
61100543	0, 2, 7	Operating data not available

Message types

msg_type	Available in message queue	Description
61100544	0, 2, 7	Operating data: input name, number of switch events, duration, distance
61100545	0, 2, 7	Input switched on
61100546	0, 2, 7	Input switched off
61100547	0, 2, 7	Request operating data - error (specific to LINK classic)
66000510	0, 2, 7	Device on (specific to TomTom GO 715)
		Note: This device is no longer in use.
66000511	0, 2, 7	Device off (specific to TomTom GO 715)
		Note: This device is no longer in use.
70000600	0, 2	Switch indicated output on
70000601	0, 2	Switch indicated output off
70000602	0, 2	Acknowledgment for message 600
70000603	0, 2	Acknowledgment for message 601
71100600	0, 2	Switch indicated output on
71100601	0, 2	Switch indicated output off
71100602	0, 2	Acknowledgment for message 600
71100603	0, 2	Acknowledgment for message 601
80000705	0, 2, 5, 7	Status message
80000706	0, 2, 5, 7	Text message
80000710	0, 2, 5, 7	Logon driver (including tachograph driver card inserted)
80000711	0, 2, 5, 7	Logoff driver (including tachograph driver card removed)
80000712	0, 2, 5, 7	Begin of work, driver indicated
80000713	0, 2, 5, 7	End of work, driver indicated
80000714	0, 2, 5, 7	Begin of break, driver indicated
80000715	0, 2, 5, 7	End of break, driver indicated

Message types

msg_type	Available in message queue	Description
80000716	0, 2, 5, 7	Work status change, indicating driver role, old and new work status (applies to all PRO 71xx, 91xx devices when used with identified driver and Remote LINK Working Time)
80000717	0, 2, 5, 7	Work started (driver role and driver name indicated)
80000718	0, 2, 5, 7	Work ended (driver role and driver name indicated)
80000719	0, 2, 5, 7	Work time event, indicating driver
80000750	0, 2, 5, 7	Message read
80000751	0, 2, 5, 7	Destination reached
80000752	0, 2, 5, 7	Navigation started (destination indicated)
80000753	0, 2, 5, 7	Navigation cancelled
80000754	0, 2, 5, 7	Message received
80000755	0, 2, 5, 7	Message discarded
80000756	0, 2, 5, 7	Connection established to device
80000770	0, 2, 5, 7	Digital tachograph connected
80000771	0, 2, 5, 7	Digital tachograph disconnected
80000772	0, 2, 5, 7	Device signals disconnection of unknown digital tachograph
80000773	0, 2, 5, 7	Tachograph driver card not assigned to driver
80000774	0, 2, 5, 7	Digital tachograph card (company card, workshop card, control card) inserted into digital tachograph
80000775	0, 2, 5, 7	Digital tachograph card (company card, workshop card, control card) removed from digital tachograph
80000776	0, 2, 5, 7	Time difference between digital tachograph and LINK device
80000777	0, 2, 5, 7	Working state changed for digital tachograph card that is not assigned to a driver in WEBFLEET
80000778	0, 2, 5, 7	Driving without appropriate card started
80000779	0, 2, 5, 7	Driving without appropriate card ended
80000780	0, 2, 5, 7	Remote LINK is paired
80000781	0, 2, 5, 7	Remote LINK low battery (specific to LINK 5xx/4xx/3xx)

Message types

msg_type	Available in message queue	Description
80000782	0, 2, 5, 7	Driver logon
80000783	0, 2, 5, 7	Unknown driver logon
80000784	0, 2, 5, 7	Driver logoff
80000785	0, 2, 5, 7	Unknown driver logoff
80000786	0, 2, 5, 7	Working time event of driver
80000787	0, 2, 5, 7	Working time event of unknown employee
80000788	0, 2, 5, 7	Remote LINK pairing rejected as not supported by subscription
80000789	0, 2, 5, 7	Remote LINK battery replaced
80000790	0, 2, 5, 7	Remote LINK setup request per installation tool
80000791	0, 2, 5, 7	Remote LINK setup response for installation tool
80000792	0, 2, 5, 7	Remote LINK pairing rejected as there is already another device paired
80000800	0, 2, 5, 7	ecoPLUS paired (specific to LINK 5xx/4xx/3xx)
80000801	0, 2, 5, 7	ecoPLUS pairing rejected as not supported by subscription
80000802	0, 2, 5, 7	ecoPLUS pairing rejected as there is already another device assigned (specific to LINK 5xx/4xx/3xx)
80000805	0, 2, 5, 7	ecoPLUS power status (specific to LINK 5xx/4xx/3xx)
80000806	0, 2, 5, 7	ecoPLUS fuel type changed (specific to LINK 5xx/4xx/3xx)
80000807	0, 2, 5, 7	ecoPLUS connection lost (specific to LINK 5xx/4xx/3xx)
80000808	0, 2, 5, 7	ecoPLUS plugged into vehicle (specific to LINK 5xx/4xx/3xx)
80000809	0, 2, 5, 7	ecoPLUS power reconnected
80000811	0, 2, 5, 7	Acceleration event
80000820	0, 2, 5, 7	Fuel level in the fuel tank decreased during driving
80000821	0, 2, 5, 7	Unexpected fuel loss - Significant drop of fuel level in the fuel tank detected
80000822	0, 2, 5, 7	Refuelled vehicle - Significant increase of fuel level in the fuel tank detected

Message types

msg_type	Available in message queue	Description
80000830	0, 2, 5, 7	Fuel level in fuel tank is low
80000840	0, 2, 5, 7	FMS connected
80000841	0, 2, 5, 7	FMS disconnected (specific to LINK 510/710)
80000860	0, 2, 5, 7, 15	<p>Mobile-terminated - LINK.connect/Binary message was sent to LINK/device.</p> <p>This message contains an outgoing actual opaque payload message. The payload is not repeated as the integration server backend has previously sent it. Integrations have to store this message when following up on the delivery status of outbound opaque payload to a device.</p>
80000861	0, 2, 5, 7, 15	<p>Mobile-originated - Status response for aux_device_data_out/app_device_data_out</p> <p>This message acknowledges device data sent from the integration server backend to a device. After using sendAuxDeviceData/sendBinaryMessage the integrator should wait for this acknowledge message to come through on the Queue Service and check the status of the opaque payload data sent out. Before this acknowledge message is received back from the device by WEBFLEET/integration server backend, all further calls to sendAuxDeviceData/sendBinaryMessage will be rejected by WEBFLEET with a specific error message, as it is assumed that the previous opaque payload transmission is still in progress.</p> <p>JSON structures in surplus_data:</p> <ul style="list-style-type: none"> • aux_device_data_out_status/app_data_out_status • aux_device_data_quota/app_data_quota • aux_device_data_reference/app_data_reference
80000862	0, 2, 5, 7, 15	<p>Mobile-originated - Contains the payload that was sent by the device.</p> <p>This message contains incoming actual opaque payload data from a device. Integrations have to store this data as there is no other way for the integration server backend to retrieve the opaque payload data.</p> <p>JSON structures in surplus_data:</p> <ul style="list-style-type: none"> • aux_device_data_in/app_data_in • aux_device_data_quota/app_data_quota • aux_device_data_reference/app_data_reference

Message types

msg_type	Available in message queue	Description
80000863	0, 2, 5, 7, 15	<p>Mobile-terminated - Response sent to the device after receiving third party data.</p> <p>This message acknowledges data received from the device. Integrations can use this message for tracking the message flow.</p> <p>JSON structures in surplus_data:</p> <ul style="list-style-type: none"> • aux_device_data_status/app_data_status • aux_device_data_reference/app_data_reference
80000864	0, 2, 5, 7, 15	<p>Mobile-originated/mobile-terminated - Control message.</p> <p>This is a multi-purpose control message sent to the device or received from the device.</p>
80000880	0, 2, 5, 7	<p>List of current vehicle Diagnostic Trouble Codes has changed.</p> <p>JSON structure in surplus_data:</p> <ul style="list-style-type: none"> • troublecodes
80000913	0, 2, 5, 7	LINK 105 pairing rejected (there is already another device assigned)
80000914	0, 2, 5, 7	LINK 105 paired
80000915	0, 2, 5, 7	LINK 105 pairing rejected (not supported by subscription)
80000916	0, 2, 5, 7	LINK 105 setup response for installation tool
80000917	0, 2, 5, 7	LINK 105 setup request via installation tool
80000918	0, 2, 5, 7	LINK 105 connection lost
80000919	0, 2, 5, 7	LINK 105 connection re-established
80000927	0, 2, 5, 7	Service token request/response message
80000930	0, 2	generic CAN data
80000934	0, 2	Vehicle battery voltage measurement
80000945	0, 2, 5, 7	Driver/worker worktime event (specific to PRO 2020)
80000946	0, 2, 5, 7	Driver key signals driver logon but driver is undefined because key value is unknown or not assigned
80000947	0, 2, 5, 7	Driver key signals driver logoff but driver is undefined because key value is unknown or not assigned
80000948	0, 2, 5, 7	Driver key signals driver logoff

Message types

msg_type	Available in message queue	Description
80000949	0, 2, 5, 7	Driver key signals driver logon
80000950	0, 2, 5, 7	Driver key signals driver logoff but driver is not assigned to this unit
80000971	0, 2	Signals a door's state has changed
80000981	0, 2, 5, 7	Number of days driven in roaming area
80000982	0, 2, 5, 7	Exceeded maximum days driven in roaming area
80001000	0, 2	Device Update: Network check request
80001001	0, 2	Device Update: Network check response
80001002	0, 2	Device Update: Key request
80001003	0, 2	Device Update: Key response
80001004	0, 2	Device Update: Start
80001005	0, 2	Device Update: Result
80001006	0, 2	Device Update: Progress
80001040	0, 2, 5, 7	Driver key signals driver logon but driver is undefined because key value is unknown or not assigned
80001041	0, 2, 5, 7	Driver key signals driver logoff but driver is undefined because key value is unknown or not assigned
80001042	0, 2, 5, 7	Driver key signals driver logoff
80001043	0, 2, 5, 7	Driver key signals driver logon
80001044	0, 2, 5, 7	Driver key signals driver logoff but driver is not assigned to this unit
80001045	0, 2	Driver Key Identification 2: Driver Key Identification Result
80001046	0, 2	Driver Key Identification 2: Driver logon rejected
80001050	0, 2	Device reports periodic eco data without trips
80001051	0, 2	Device reports periodic eco data without trips, fuel information missing or invalid
80001060	0, 2	Vehicle Data Reporting: Announcement of available data items
80001061	0, 2, 5, 7	Vehicle Data Reporting: Cruise control switched on
80001062	0, 2, 5, 7	Vehicle Data Reporting: Cruise control switched off

Message types

msg_type	Available in message queue	Description
80001064	0, 2, 5, 7	Vehicle Data Reporting: Engine switched on
80001065	0, 2, 5, 7	Vehicle Data Reporting: Engine switched off
80001066	0, 2	Contains the length of the engine on interval
80001067	0, 2	Contains the length of the engine on interval, but no total engine hours data
80001068	0, 2	Contains the length of the engine on interval, but no fuel related data
80001069	0, 2	Contains the length of the engine on interval, but no fuel and no total engine hour related data
80001080	0, 2	Driver key list request
80001081	0, 2	Driver key list
80001091	0, 2	Tire status changed message
80001092	0, 2	Tire status request
80001093	0, 2	External tire issue
80001100	0, 2	Exhaust fluid warning
80001200	0, 2, 5, 7	Engine oil temperature too high
80001201	0, 2, 5, 7	Engine coolant temperature too high
81100700	0, 2, 5, 7	Event message, status
81100703	0, 2, 5, 7	Status log - no data available
81100704	0, 2, 5, 7	Request status log - error
81100751	0, 2, 5, 7	Odometer manual input
81100760	0, 2, 5, 7	Arriving at customer (specific to LINK classic)
81100761	0, 2, 5, 7	Departing from customer (specific to LINK classic)
81100763	0, 2, 5, 7	Trip begin (specific to LINK classic)
81100764	0, 2, 5, 7	Trip end (specific to LINK classic)
81100765	0, 2, 5, 7	Begin waiting
81100766	0, 2, 5, 7	End waiting
90000550	0, 2	Query for status of the external GPS antenna (out-bound) (specific to LINK 510/710)

Message types

msg_type	Available in message queue	Description
90000801	0, 2	Configuration acknowledge (specific to LINK classic)
90000808	0, 2	Firmware release information
90000811	0, 2	Reset unit - ok
90000814	0, 2	CAN configuration request
90000815	0, 2	CAN config
90000816	0, 2	CAN config acknowledge
90000826	0, 2	Device successfully activated
90000827	0, 2	Device has been reset
90000843	0, 2	PRO 5150 activation request. This message is created when a TomTom PRO 5150 that is not yet connected to WEBFLEET pairs with a LINK device for the first time and requests for the additional service PRO 5150 WEBFLEET compatibility upgrade.
90000847	0, 2	Set initial engine hours
90000848	0, 2	Setting of engine hours is rejected, the LINK has another source for the total engine hours
90000849	0, 2	Acknowledgment to set initial hours
90000912	0, 2	Reset LINK 105
90000990	0, 2	CAN3 configuration request
90000991	0, 2	CAN3 config announcement
90000992	0, 2	CAN3 signals config
90000993	0, 2	CAN3 trigger config
90000994	0, 2	CAN3 signals config acknowledge
90000995	0, 2	CAN3 trigger config acknowledge
90001010	0, 2	CAN bus installation: Device request to store its configuration
90001011	0, 2	CAN bus installation: Set response
91100802	0, 2	For LINK classic: Configuration acknowledge - error (specific to LINK classic)
91100803	0, 2	Version information (specific to LINK classic)

Message types

msg_type	Available in message queue	Description
91100806	0, 2	Version information - error (specific to LINK classic)
91100841	0, 2	Device reset completed
91100842	0, 2	Device reset error
91100871	0, 2	Odometer change acknowledged
91100872	0, 2	Odometer change error
91100874	0, 2	Odometer function disabled
91100876	0, 2	Odometer
91100877	0, 2	Odometer query - error
91100878	0, 2	Odometer query - error due to private mode
91100879	0, 2	Odometer change not allowed as a digital tachograph is connected
91100881	0, 2	Ignition time counter set to ignition on time and duration
91100882	0, 2	Set ignition time counter - error
91100884	0, 2	Ignition time counter disabled
91100886	0, 2	Ignition time counter is ignition on time and duration
91100887	0, 2	Query ignition time counter - error
91100888	0, 2	Query ignition time counter - error (private mode)
101100550	0, 2	Trip distance, duration, idling information, maximum speed, average speed, GPS coverage
101100551	0, 2	This message is delivered when either no GPS signal or partly no GPS signal was available during the trip.
101100552	0, 2	Minor vehicle action (gives a summary of fuel usage and distance that do not qualify as a trip)
101100554	0, 2	Trip, distance, duration, idling information, fuel usage, maximum speed, GPS coverage
106010550	0, 2	Trip distance, duration, idling information, maximum speed, average speed, GPS coverage
106010551	0, 2	This message is delivered when either no GPS signal or partly no GPS signal was available during the trip.
106010552	0, 2	Minor vehicle action (gives a summary of fuel usage and distance that do not qualify as a trip)

msg_type	Available in message queue	Description
110000729	0, 2, 4	Order sent (outbound)
110000730	0, 2, 4	Order accepted
110000731	0, 2, 4	Order rejected
110000732	0, 2, 4	Order started
110000733	0, 2, 4	Order completed
110000734	0, 2, 4	Order cancelled
110000735	0, 2, 4	Order modified (outbound)
110000736	0, 2, 4	Cancel order (outbound)
110000737	0, 2, 4	Order deleted (outbound)
110000738	0, 2, 4	All orders deleted (outbound)
110000760	0, 2, 4	Order state
110000761	0, 2, 4	Estimated time of arrival to order destination
110000762	0, 2, 4	Time left until order destination is reached
110000763	0, 2, 4	Estimated time of arrival without order information
110000764	0, 2, 4	List of invalid order waypoints
110000765	0, 2, 4	Appended order waypoints
110000766	0, 2, 4	Estimated time of arrival without distance to destination information
110000767	0, 2, 4	Estimated time of arrival without order and without distance information
111100730	0, 2, 4	Order accepted
111100731	0, 2, 4	Order rejected
111100732	0, 2, 4	Order started
111100733	0, 2, 4	Order completed
111100734	0, 2, 4	Order cancelled
111100735	0, 2, 4	Arrived at loading site (specific to LINK classic)
111100736	0, 2, 4	Begin loading (specific to LINK classic)
111100737	0, 2, 4	End loading (specific to LINK classic)

Message types

msg_type	Available in message queue	Description
111100738	0, 2, 4	Departure from loading site (specific to LINK classic)
111100739	0, 2, 4	Arrival at unloading site
111100741	0, 2, 4	End unloading
111100742	0, 2, 4	Departure from unloading site
111100743	0, 2, 4	Delay announcement indicating time
111100744	0, 2, 4	Begin waiting
111100745	0, 2, 4	End waiting
111100746	0, 2, 4	Additional costs (type, amount, currency)
111100747	0, 2, 4	Arriving at depot
111100749	0, 2, 4	Statustext

Message types

JSON objects

Parameters specific to acc_events

Parameter	Type	Description
type	int	The type of acceleration. Valid values: <ul style="list-style-type: none">• 0 - Acceleration• 1 - Braking• 2 - Steering left• 3 - Steering right
maxacc	int	Maximum acceleration, in milli-g.
avgacc	int	Average acceleration, in milli-g.
dir	int	Direction of the acceleration, 0 ... 360.
startspeed	float	Speed at the beginning of the acceleration event, in km/h.
maxaccspeed	float	Maximum acceleration speed.
endspeed	float	Speed at the end of the acceleration event, in km/h.

Parameter	Type	Description
lat	int	Geographic latitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd). Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer. See Geographic coordinate conversion on Wikipedia .
lon	int	Geographic longitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd). Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer. See Geographic coordinate conversion on Wikipedia .
st	dateTime	Time at which the acceleration event started.
maxacct	dateTime	Maximum acceleration time.
et	dateTime	Time at which the acceleration event ended.
dur	int	Duration of the acceleration event in milliseconds. The maximum precision is 100ms.

Parameters specific to app_data_in

Parameter	Type	Description
app_id	string	An identifier to mark the application on the device.
app_data	string	Base64 encoded aux device data received from device.

Parameters specific to app_data_out_status

Parameter	Type	Description
status	int	Result status of sending operation. Valid values: <ul style="list-style-type: none">• 0 - Data was sent successfully.• 1 - Device has rejected the message, because the internal buffer is full.• 2 - The last sent but rejected message would now fit into the buffer of the device.

Parameters specific to aux_device_data_quota

Parameter	Type	Description
max	int	Maximum allowed data volume for a period.
used	int	Used volume in current period.

Parameters specific to app_data_quota

Parameter	Type	Description
max	int	Maximum allowed data volume for a period.
used	int	Used volume in current period.

Parameters specific to app_data_reference

Parameter	Type	Description
correlation_id	int	User provided correlation ID of outgoing messages.
reference_id	int	Internal ID provided by WEBFLEET and device. Available for outgoing and incoming messages.

Parameters specific to aux_device_data_in

Parameter	Type	Description
device_id	string	Identifies the sending third party device. In the case of Bluetooth this is the MAC address.
aux_data	string	Base64 encoded aux device data received from LINK.

Parameters specific to aux_device_data_out_status

Parameter	Type	Description
status	int	Result status of sending operation. Valid values: <ul style="list-style-type: none">• 0 - data was sent successfully.• 1 - LINK has rejected the message, because the internal buffer is full.• 2 - the last sent but rejected message would now fit into the buffer of the LINK.

Parameters specific to aux_device_data_reference

Parameter	Type	Description
correlation_id	int	User-provided correlation ID of outgoing messages.
reference_id	int	Internal ID provided by WEBFLEET and LINK. Available for outgoing and incoming messages.

Parameters specific to ep_paireddata

Parameter	Type	Description
ep_btaddress	String	The Bluetooth address of the ecoPLUS.
version_info	String	

Parameters specific to ep_snapshotdata

Parameter	Type	Description
avgfuelusage_distance	int	in ml/100km, only returned if distance is greater than 0.
avgfuelusage_time	int	in ml/h
rpm	int	revolutions per minute
gear	int	the current gear

Parameters specific to aux_device_data_in

Parameter	Type	Description
distance	int	The difference between start_odometer and end_odometer. Unit of measurement is "meters".
fuel_usage	float	Fuel consumption in litres Note: Max. three decimals allowed.
co2	int	Carbon dioxide emissions in grams.

Parameters specific to fms_fuel_difference

Parameter	Type	Description
slopetype	int	Fuel jump or continuous event. Valid values: <ul style="list-style-type: none">• 0 - leap• 1 - continuous
timespan	int	Duration of event if continuous, in seconds.
fuellevel_start	int	Fuel level at start of the event in per mill.
fuellevel_end	int	Fuel level at end of the event in per mill.

Parameters specific to fms_snapshotdata

Parameter	Type	Description
fuel_level	int	Current fuel level in per mill.

Parameters specific to fms_tripdata

Parameter	Type	Description
fuel_usage	int	Fuel usage in ml.
rpmViolation_dura- tion	int	The duration during the trip the engine speeds over a threshold, in seconds.

Parameters specific to troublecodes

Parameter	Type	Description
dtclist	Array of string	Contains all current Diagnostic Trouble Codes. Optional.
ptclist	Array of sting	Contains all current Pending Trouble Codes. Optional.
milon	Boolean	Flag indicating whether the malfunction indicator is lit. Optional.

Parameters specific to er_tripdata

Parameter	Type	Description
fuel_usage	float	Fuel usage in ml.

Parameter	Type	Description
co2	int	Carbon dioxide emissions in grams. Optional.

Objects

showObjectReportExtern

Description

Delivers a list of all objects.

Provides access to object master data and the most recent position information available for each object.

Technical details

SOAP endpoint address / function name objectsAndPeopleReportingService#showObjectReport

Request limits 6 requests / minute

Use [Message queues](#) instead of showObjectReportExtern, if you need all tracking data for the objects in your account.

Object types – An object in WEBFLEET always has a certain type (vehicle, person, asset, etc.). Every type defines special properties. These properties are listed by special actions (showVehicleReportExtern etc.), whereas this action lists all objects with type independent properties like number, name and description.

Code sample 4-1: Request

CSV request

```
https://csv.webfleet.com/extern?account=xxx&username=xxx&password=xxx&apikey=xxx&lang=de&action=showObjectReportExtern&filterstring=Demo
```

SOAP request

```
<soap:Envelope xmlns:soap="http://www.w3.org/2003/05/soap-envelope"
  xmlns:ser="http://connect.webfleet.tomtomwork.com/services">
  <soap:Header/>
  <soap:Body>
    <ser:showObjectReport>
      <aParm>
        <accountName>xxx</accountName>
        <userName>xxx</userName>
        <password>xxx</password>
        <apiKey>xxx</apiKey>
      </aParm>
      <gParm>
        <locale>DE</locale>
        <timeZone>Europe_Berlin</timeZone>
      </gParm>
      <objectFilter>
        <filterCriterion>Demo</filterCriterion>
      </objectFilter>
    </ser:showObjectReport>
  </soap:Body>
</soap:Envelope>
```

Parameters

showObjectReportExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to showObjectReportExtern:

Parameter	Type	Description
filterstring	string	An arbitrary pattern that is located in the object data.
objectgroupname	string	A name of an object group.
ungroupedonly	string	Allows to filter on objects that are currently not assigned to a certain object group. Only valid value is true. This parameter overrules the group name filter parameter. This parameter is optional.
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to objectuid.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to objectno.
externalid	string	For future use. This parameter is optional.

Parameters specific to showObjectReportExtern

Result

Result for showObjectReportExtern:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
objectname	string	Display name of an object.
objectclassname	string	
objecttype	string	Can be empty or contain the valid values listed in vehicletype , see updateVehicle .
description	string (500)	Vehicle description
lastmsgid	string	The ID of the last message received from or sent to this object. msgid identifies a message and is system-wide unique. Possible values are in the range $0 \leq \text{msgid} \leq 2^{64}-1$.

Result for showObjectReportExtern

Parameter	Type	Description
deleted	boolean	
msgtime	string	
longitude	string	Geographic longitude in the form GGG° MM' SS.S" E/W in the WGS84 coordinate system.
latitude	string	Geographic latitude in the form GGG° MM' SS.S" N/S in the WGS84 coordinate system.
postext	string	
postext_short	string	
pos_time	dateTime	Time that is related to the last known position of the vehicle.
speed	string	
course	nonNegativeInteger	Compass direction in degrees (0° ... 360°).
direction	nonNegativeInteger	Cardinal and intercardinal compass directions, derived from course. Valid values: <ul style="list-style-type: none"> • 1 - North • 2 - Northeast • 3 - East • 4 - Southeast • 5 - South • 6 - Southwest • 7 - West • 8 - Northwest
quality	string	Not supported anymore. This was only specific to LINK classic.
satellite	string	Not supported anymore. This was only specific to LINK classic.
status	string	GPS signal status indicator, possible values are: <ul style="list-style-type: none"> • A - ok: a current GPS fix is available with this message. • V - warn: a current GPS fix is available, but it might be inaccurate. • L - last: the GPS position is from the last known good fix, a current fix is not (yet) available. • 0 - invalid: no GPS fix available or GPS has no meaning for this message.

Result for showObjectReportExtern

Parameter	Type	Description
dest_latitude	int	Geographic latitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd).
dest_longitude	int	Geographic longitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd).
dest_text	string	
dest_eta	dateTime	Date and time of the estimated time of arrival (eta) as reported from the navigation system.
dest_isorder		
dest_addrnr		
orderno	string (20)	Account-unique order id, case sensitive. Maximum capacity is 20 bytes, actual number of characters depends on the byte count consumed by the UTF-8 encoding of those characters.
driver	string (20)	Account-unique driver number, case-sensitive.
drivername	string	Display name of a driver.
drivertelmobile	string	Mobile phone number of the driver.
codriver	string (20)	Account-unique driver number, case-sensitive.
codrivername	string	Display name of a co-driver.
codrivertelmobile	string	Mobile phone number of the co-driver.
driver_currentworkstate	nonNegativeInteger	Valid values: <ul style="list-style-type: none"> • 0 - Unknown • 1 - Free time (PND only) • 2 - Pause (PND and digital tachograph) • 3 - Standby (digital tachograph only) • 4 - Working (PND only) • 5 - Driving (digital tachograph only) • 6 - Other work (digital tachograph only) When no driver has signed on, <code>driver</code> is empty, the state shown indicates the current working state of the vehicle.

Result for showObjectReportExtern

Parameter	Type	Description
codriver_currentworkstate	nonNegativeInteger	<p>Valid values:</p> <ul style="list-style-type: none"> • 0 - Unknown • 1 - Free time (PND only) • 2 - Pause (PND and digital tachograph) • 3 - Standby (digital tachograph only) • 4 - Working (PND only) • 5 - Driving (digital tachograph only) • 6 - Other work (digital tachograph only)
rll_btaddress	string (17)	<p>Remote LINK Bluetooth address. The IEEE 802 MAC-48/EUI-48 address of a Bluetooth device, formatted as six groups of two hexadecimal digits, separated by colons (:).</p> <p><i>Example: 00:13:6C:88:26:0B</i></p>
odometer	string	The current odometer value in 100 meter.
ignition	nonNegativeInteger	<p>The current state of the ignition.</p> <ul style="list-style-type: none"> • 0 - Ignition off • 1 - Ignition on
ignition_time	string	The time the last ignition state was reported.
dest_distance	string	<p>The distance to the current navigation destination in meters. If empty, no navigation destination was specified.</p>
tripmode	nonNegativeInteger	<p>Valid values:</p> <ul style="list-style-type: none"> • 0 - Unknown trip type • 1 - Private trip • 2 - Business trip • 3 - Commute trip • 4 - Correction trip (user changed the odometer value manually)
standstill	nonNegativeInteger	<p>Indicates if the vehicle is standing still. Valid values:</p> <ul style="list-style-type: none"> • 0 - not standing still • 1 - standing still
pndconn	nonNegativeInteger	<p>Indicates if a navigation device is connected to the LINK device. Valid values:</p> <ul style="list-style-type: none"> • 0 - not connected • 1 - connected

Result for showObjectReportExtern

Parameter	Type	Description
latitude_mdeg	int	<p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
longitude_mdeg	int	<p>Geographic longitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated.</p> <p>Can be used alternatively to <code>objectno</code>.</p>
fuellevel	int	<p>The current fuel level in per mill.</p> <p>Note: This information is only available for LINK 510/710 devices connected to the vehicle's FMS.</p>
externalid	string	For future use.
driveruid	string	<p>A unique, unchangeable identifier for the indicated driver, automatically generated.</p> <p>Can be used alternatively to <code>driverno</code>.</p>
codriveruid	string	<p>A unique, unchangeable identifier for the indicated codriver, automatically generated.</p> <p>Can be used alternatively to <code>codriver</code>.</p>
driverkey_deviceaddress	string	<p>JSON encoded string with an array of strings.</p> <p>Each string contains the address of the driver key reading device which is associated with the vehicle.</p> <p><i>Example: ["00:21:3E:B3:8D:EA"]</i></p>
fuellevel_milliliters	string	<p>The current fuel level in milliliters.</p> <p>Note: This information is only available for LINK 204.</p>

Result for `showObjectReportExtern`

Parameter	Type	Description
engine_operation_time	nonNegativeInteger	Returns the accumulated time of operation of the engine in seconds. Note: This information is only available for some LINK devices e.g. LINK 7x0 (with input configured for "Engine state") or LINK devices that are connected to FMS.

Result for showObjectReportExtern

showVehicleReportExtern

Description

Lists all objects of type "Vehicle".

Technical details

SOAP endpoint address / function name objectsAndPeopleReportingService#showVehicleReport

Request limits	10 requests / minute
----------------	----------------------

Parameters

showVehicleReportExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to showVehicleReportExtern:

Parameter	Type	Description
filterstring	string	An arbitrary pattern that is located in the object data.
objectgroupname	string	A name of an object group.
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .
externalid	string	For future use. This parameter is optional.

Result

Result for showVehicleReportExtern:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
objectname	string	Display name of an object.
licenseplatenumber	string	
vehicletype	string	Can be empty or contain the valid values listed in vehicle-type, see updateVehicle .
width	string	
length	string	
height	string	
maxweight	string	
netweight	string	
netload	string	
power	string	
numaxes	string	
identnumber	string (20)	If connected to FMS or Tachograph or when using a LINK 105 or ecoPLUS this field contains the VIN (Vehicle Identification Number) and cannot be changed.
registrationdate	string	
vh_avgfuelusage	int	Vehicle-based fuel consumption reference value, in ml/100 km
ep_avgfuelusage	int	ecoPLUS-based fuel consumption reference value, in ml/100 km
fl_avgfuelusage	int	Fleet-based fuel consumption reference value, in ml/100km.
vh_fueltype	int	Vehicle configured fuel type. Valid values: <ul style="list-style-type: none">• 0 - unknown• 1 - diesel• 2 - gasoline• 3 - lpg• 4 - hybrid petrol• 5 - hybrid diesel• 6 - electric

Parameter	Type	Description
ep_fueltype	int	<p>Fuel type determined by ecoPLUS.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 1 - diesel • 2 - gasoline
fl_fueltype	int	<p>Fleet based fuel type.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 0 - unknown • 1 - diesel • 2 - gasoline • 3 - lpg • 4 - hybrid petrol • 5 - hybrid diesel • 6 - electric
enginesize	nonNegativeInteger	Engine size in ccm.
ep_btaddress	string (17)	<p>ecoPLUS Bluetooth address.</p> <p>The IEEE 802 MAC-48/EUI-48 address of a Bluetooth device, formatted as six groups of two hexadecimal digits, separated by colons (:).</p> <p><i>Example: 00:13:6C:88:26:0B</i></p>
speedlimit	float	Speed limit in km/h, min: 0, max: 300
vehiclecolor	string	<p>Valid values:</p> <ul style="list-style-type: none"> • white • grey • black • red • orange • yellow • green • blue
description	string (500)	Vehicle description.
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated.</p> <p>Can be used alternatively to <code>objectno</code>.</p>
vh_rpmlimit	int	<p>Indicates the engine's maximum allowed revolutions per minute.</p> <p>This value is used to report RPM violations.</p> <p>Supported by LINK 510/710 connected to FMS.</p>

Parameter	Type	Description
fl_rpmlimit	int	Indicates the engine's maximum allowed revolutions per minute defined for the whole vehicle fleet. This value is used to report RPM violations. Supported by LINK 510/710 connected to FMS.
externalid	string	For future use.
obu_btaddress	string (17)	The Bluetooth address of the LINK device. This information is currently available for LINK 510/710/410 with firmware version 3.4 or higher. The IEEE 802 MAC-48/EUI-48 address of a Bluetooth device, formatted as six groups of two hexadecimal digits, separated by colons. <i>Example: 00:13:6C:88:26:0B</i>
fueltanksize	int	Size of the fuel tank in litres.
ep_type	nonNegativeInteger	Type of the OBDII dongle (eco periphery). Valid values: <ul style="list-style-type: none">• 1 - ecoPLUS• 2 - LINK 105
manufacturedyear	int	The year in which the vehicle was manufactured. This parameter is optional.
fuelreference	nonNegativeInteger	Indicates to which type of fuel reference to refer to. Valid values: <ul style="list-style-type: none">• 0 - The reference value defined for the fleet.• 1 - The reference value defined for the individual vehicle.• 2 - ecoPLUS
accelerationvehicle-type	string	The "acceleration vehicle type" is used to calibrate the acceleration event handling. By default it is determined by the vehicle type and can be overwritten via updateVehicle Valid values: <ul style="list-style-type: none">• heavy_weight• medium_weight• light_weight

showNearestVehicles

Description

showNearestVehicles retrieves a list of vehicles that are within a defined radius around the indicated location. This action delivers details on the routed distance and the routed time for the 8 nearest vehicles. The list is sorted by:

1. Object state.
2. Linear distance to the location.
3. Object number.

Technical details

SOAP endpoint address / function name objectsAndPeopleReportingService#showNearestVehicles

Request limits	10 requests / minute
----------------	----------------------

Parameters

showNearestVehicles requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to showNearestVehicles:

Parameter	Type	Description
objectgroupname	string	A name of an object group.
addrno	string (10)	Identifying number of an address. Unique within an account. Is optional if you are using <code>latitude</code> and <code>longitude</code> to specify the destination.
latitude	int	Geographic latitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd). Transformation from degree, minutes and seconds can be done with the following calculation: $(\text{degrees} + \text{minutes}/60 + \text{seconds}/3600) * 10^6$ and rounding to an integer. See Geographic coordinate conversion on Wikipedia . This parameter is optional if <code>addrno</code> is indicated.
longitude	int	Geographic longitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd). Transformation from degree, minutes and seconds can be done with the following calculation: $(\text{degrees} + \text{minutes}/60 + \text{seconds}/3600) * 10^6$ and rounding to an integer. See Geographic coordinate conversion on Wikipedia . This parameter is optional if <code>addrno</code> is indicated.

Parameter	Type	Description
priority	int	<p>Defines the priority of attributes by which the results shall be sorted.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 1 - Object state / linear distance / object number • 2 - Linear distance / object number <p>The default is 1.</p> <p>This parameter is optional.</p> <p>Note: The first 8 results will be returned including routed distance and estimated travel time.</p>
maxdistance	int	<p>Defines the maximum linear distance from the indicated location, in meters.</p> <p>Vehicles that are further away from the location than the defined distance will not be included in the result list.</p> <p>This parameter is optional.</p>

Result

Result for showNearestVehicles:

Parameter	Type	Description
objectno	string (10)	<p>Identifying number of an object.</p> <p>Unique within an account, case-sensitive.</p>
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated.</p> <p>Can be used alternatively to <code>objectno</code>.</p>
objectstate	int	<p>The status the vehicle currently has.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 1 - available • 2 - has order • 3 - offline
latitude	int	<p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^6 grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p> <p>This parameter is optional if <code>addrno</code> is indicated.</p>

Parameter	Type	Description
longitude	int	Geographic longitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd). Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer. See Geographic coordinate conversion on Wikipedia . This parameter is optional if <code>addrno</code> is indicated.
lineardistance	int	The linear distance between the vehicle and the defined location, in meters.
routedistance	int	The distance calculated based on the roads to take from the actual position to the defined location considering HD Traffic information, in meters.
routetime	int	The time that is needed to get to the defined location using the calculated route, see <code>routedistance</code> , in seconds.

showContracts

Description

This action shows contract and device data for selected devices.

Technical details

SOAP endpoint address / function name `objectsAndPeopleReportingService#showContracts`

Request limits	6 requests / minute
----------------	---------------------

Parameters

showContracts requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to showContracts:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. This parameter is optional.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .

Result

Result for showContracts:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
contractno	string	
begin_date	dateTime	ISO 8601 -formatted date and time in the UTC timezone, combined representation in the extended format. Example: 2007-12-24T16:00:00+02:00
end_date	dateTime	ISO 8601 -formatted date and time in the UTC timezone, combined representation in the extended format. Example: 2007-12-24T16:00:00+02:00
tariff_name	string	
activation_key	string	
iccid	string	SIM card number
roaming_enabled	boolean	
obu_type	string	
obu_serialno	string	
obu_osversion	string	
obu_appversion	string	
pnd_type	string	
pnd_serialno	string	
pnd_ncversion	string	
pnd_appversion	string	
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .
referenceno	string	Reference number for the object individually assigned by the customer.

Parameter	Type	Description
pnd_mapversion	string	<p>Name and version of the map, that is currently installed on the navigation device. This column can be empty, if there is no navigation device in use for this contract.</p> <p>This column may contain multiple values separated by comma if there is more than one map installed on the navigation device.</p>
msisdn	string	<p>The MSISDN of the SIM card.</p> <p>This value is optional and might not be used for certain device types.</p>

updateVehicle

Description

This action allows the update of vehicle details.

Technical details

SOAP endpoint address / function name objectsAndPeopleReportingService#updateVehicle

Request limits	10 requests / minute
----------------	----------------------

Parameters

updateVehicle requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to updateVehicle:

Parameter	Type	Description
objectno	string (10)	<p>Identifying number of an object.</p> <p>Unique within an account, case-sensitive.</p> <p>Can be used alternatively to <code>objectuid</code>.</p> <p>If both parameters <code>objectuid</code> and <code>objectno</code> are given, then <code>objectno</code> will be updated. <code>objectno</code> is required to have between 1 and 10 characters and must not already exist.</p>
vehicletype	string	<p>Case-sensitive.</p> <p>For valid values, see the List of vehicle types at the end of this section.</p>

Parameter	Type	Description
vehiclecolor	string	<p>Case-sensitive. Valid values:</p> <ul style="list-style-type: none"> • white • grey • black • red • orange • yellow • green • blue
identnumber	string (20)	If connected to FMS or Tachograph or when using a LINK 105 or ecoPLUS this field contains the VIN (Vehicle Identification Number) and cannot be changed.
registrationdate	string (20)	
denotation	string (30)	Changes the value of objectname.
licenseplatenumber	string (20)	
speedlimit	float	<p>Speed limit in km/h.</p> <ul style="list-style-type: none"> • min: 0 • max: 300 <p>This parameter is optional.</p>
fuelconsumption	float	<p>Fuel consumption in l/100km.</p> <ul style="list-style-type: none"> • min: 0 • max: 100 <p>This parameter is optional.</p>
fuelype	int	<p>Case-sensitive. Valid values:</p> <ul style="list-style-type: none"> • 0 - unknown • 1 - diesel • 2 - gasoline • 3 - lpg • 4 - hybrid petrol • 5 - hybrid diesel • 6 - electric
netweight	float	in kg
maxweight	float	in kg
netload	float	in kg
maxload	float	in kg

Parameter	Type	Description
numaxles	nonNegativeInteger	
length	nonNegativeInteger	in mm
width	nonNegativeInteger	in mm
height	nonNegativeInteger	in mm
description	string (500)	Vehicle description
power	float	in kW
enginesize	nonNegativeInteger	in ccm
reset_fuelavg	boolean	Reset switch for measured or calculated average fuel consumption. <ul style="list-style-type: none">• 1 - reset
odometer	nonNegativeInteger	Updated odometer value in meters.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> . Can also be used to update <code>objectno</code> , please refer to the description of parameter <code>objectno</code> .
rpmlimit	int	Indicates the engine's maximum allowed revolutions per minute. This value is used to report RPM violations. Supported by LINK 510/710 connected to FMS. Valid values: <ul style="list-style-type: none">• <int value> sets the vehicle specific RPM limit• "null" or empty parameter value removes the vehicle specific RPM limit. <p>Note: If the vehicle-specific value is removed, the fleet-based value will be used for RPM violation reporting.</p>
ep_btaddress	string (17)	ecoPLUS Bluetooth address. The IEEE 802 MAC-48/EUI-48 address of a Bluetooth device, formatted as six groups of two hexadecimal digits, separated by colons. <i>Example: 00:13:6C:88:26:0B</i> <p>Note: If empty, the existing value will be deleted. When omitted, the existing value will not change.</p>
		This parameter is optional.

Parameter	Type	Description
rll_btaddress	string (17)	<p>Remote LINK Bluetooth address.</p> <p>The IEEE 802 MAC-48/EUI-48 address of a Bluetooth device, formatted as six groups of two hexadecimal digits, separated by colons (:).</p> <p><i>Example: 00:13:6C:88:26:0B</i></p>
		Note: If empty the existing value will be deleted. When omitted the existing value will not change.
		This parameter is optional.
externalid	string	For future use.
fueltanksize	int	Size of the fuel tank in litres.
ep_type	nonNegativeInteger	<p>Type of the OBDII dongle (eco periphery).</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 1 - ecoPLUS • 2 - LINK 105
manufacturedyear	int	<p>The year in which the vehicle was manufactured.</p> <p>This parameter is optional.</p>
fuelreference	nonNegativeInteger	<p>Indicates to which type of fuel reference to refer to.</p> <p>Valid values are:</p> <ul style="list-style-type: none"> • 0 - The reference value defined for the fleet. • 1 - The reference value defined for an individual vehicle. • 2 - ecoPLUS
accelerationvehicletype	string	<p>The "acceleration vehicle type" is used to calibrate the acceleration event handling. By default it is determined by the vehicle type.</p> <p>It can be overwritten with this action, but will be set back, when the vehicle type is changed.</p> <p>Case-sensitive.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • heavy_weight • medium_weight • light_weight

List of vehicle types

The following list shows valid values for parameter `vehicletype` including vehicle types, special vehicle types and devices:

- **Vehicle types** with icons that have a separate colouring option in the user interface; all eight colors are supported:

- ape (shown as "Three wheeler" in the UI)
- barge
- bike (shown as "Motor bike" in the UI)
- boom_lift
- boom_lift_truck
- bus
- caddy (shown as "Small van" in the UI)
- car
- car_station_wagon
- concrete_lorry
- containership (Shown as "Cargo ship" in the UI)
- crane
- deposit_tipper
- dump_truck
- dump_truck_open
- excavator
- garbage_truck
- heavy_truck
- heavytruck_us
- heavyweight_truck
- heavyweight_truck_trailer
- lighttruck
- light_truck_pallet
- loader (shown as "Wheel loader" in the UI)
- medium_truck
- multicar (shown as "Snow plough" in the UI)
- multivan
- pallet_truck
- pickup
- smart
- sprinter (shown as "Van / Light truck" in the UI)
- street_sweeper
- suv
- tanker_truck
- telescopic_handler
- tractor
- trailer
- train
- truck
- truck_loader_arm
- truck_trailer
- truck_with_trailer
- truck_wrecker
- van
- vespa
- wrecker
- yacht

- **Special vehicle types** – not all colours are supported; allowed colours are given in brackets:

- ambulance (yellow, blue, red, white)
 - firetruck (red)
 - police (blue, green)
 - taxi (green, blue, yellow, orange, red, black, grey, white)
 - taxi_uk (black)
- **Devices** with separate colouring option in the user interface, all eight colours are supported:
 - link
 - ecoPLUS
 - link100
 - link510
 - link610
 - link710
 - phone
 - tablet

showObjectGroups

Description

This actions retrieves a list of all object groups.

Technical details

SOAP endpoint address / function name objectsAndPeopleReportingService#showObjectGroupReport

Request limits	10 requests / minute
----------------	----------------------

Parameters

showObjectGroups requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to showObjectGroups:

Parameter	Type	Description
objectgroupname	string	The given entry filters the result list on the object groups with matching names. Can be used alternatively to <code>objectgroupid</code> .
objectgroupid	string	A unique, unchangeable identifier for the indicated object group, automatically generated. Can be used alternatively to <code>objectgroupname</code> .

Result

Result for showObjectGroups:

Parameter	Type	Description
objectgroupname	string	Name of the object group.
objectcount	string	The number of objects assigned to the indicated group. The number of objects that are not assigned to a group is not returned.
objectgroupuid	string	A unique, unchangeable identifier for the indicated object group, automatically generated.

showObjectGroupObjects

Description

Lists the assignments of objects to object groups. Each object can be in no, one or more than one group.

Using both parameters `objectgroupname` and `onbjectno`, only according matches are returned.

Technical details:

SOAP endpoint address / function name `objectsAndPeopleReportingService#showObjectGroupObjectReport`

Request limits	10 requests / minute
----------------	----------------------

Parameters

showObjectGroupObjects requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `showObjectGroupObjects`:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. This parameter is optional.
objectgroupname	string	The given entry filters the result list on the object groups with matching names, case-sensitive. This parameter is optional.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .

Result

Result for `showObjectGroupObjects`:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account. Case-sensitive.
objectname	string	Display name of an object.
objectgroupname	string	
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .
objectgroupid	string	A unique, unchangable identifier for the indicated object group, automatically generated.

attachObjectToGroup

Description

This action assigns an object to a specific object group.

Technical details

SOAP endpoint address / function name `objectsAndPeopleReportingService#attachObjectToGroup`

Request limits	1000 requests / hour
----------------	----------------------

Parameters

attachObjectToGroup requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to attachObjectToGroup:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .
objectgroupname	string	Name of the object group, case-sensitive. This parameter is required.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .

detachObjectFromGroup

Description

This action detached an object from a specific object group.

Technical details

SOAP endpoint address / function name objectsAndPeopleReportingService#detachObjectFromGroup

Request limits 1000 requests / hour

Parameters

detachObjectFromGroup requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to detachObjectFromGroup:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .
objectgroupname	string	Name of the object group, case-sensitive. This parameter is required.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .

insertObjectGroup

Description

This action creates an object group. The group name must not start with "sys\$".

Technical details

SOAP endpoint address / function name objectsAndPeopleReportingService#insertObjectGroup

Request limits 100 requests / 30 minutes

Parameters

insertObjectGroup requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to insertObjectGroup:

Parameter	Type	Description
objectgroupname	string	Name of the object group, case-sensitive. This parameter is required.

deleteObjectGroup

Description

This action deletes an object group and the assignments of all objects assigned to that group. The objects detached through this action are not being deleted.

Technical details

SOAP endpoint address / function name objectsAndPeopleReportingService#deleteObjectGroup

Request limits	100 requests / 30 minutes
----------------	---------------------------

Parameters

deleteObjectGroup requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to deleteObjectGroup:

Parameter	Type	Description
objectgroupname	string	Name of the object group, case-sensitive. This parameter is required.

updateObjectGroup

Description

This action allows to update the name of the object group while retaining the assignment of objects to that group. The group name must not start with "**sys\$**".

Technical details

SOAP endpoint address / function name objectsAndPeopleReportingService#updateObjectGroup

Request limits	100 requests / 30 minutes
----------------	---------------------------

Parameters

updateObjectGroup requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to updateObjectGroup:

Parameter	Type	Description
objectgroupname	string	Name of the object group, case-sensitive. This parameter is required.
objectgroupname_old	string	Name of the object group, case-sensitive. This parameter is required.

switchOutput

Description

Using `switchOutput` you can control the digital output of the LINK classic and the LINK 510/710 to be on or off (1 or 0). You first need to enable the digital output of the LINK classic/LINK 510/LINK 710 in the device configuration dialogue in the WEBFLEET user interface.

Technical details

SOAP endpoint address / function name `objectsAndPeopleReportingService#switchOutput`

Request limits 10 requests / minute

Parameters

`switchOutput` requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific for switchOutput:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .
status	int	Valid values: <ul style="list-style-type: none">• 1• 0 This parameter is required.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .

Parameter	Type	Description
output_name	string (50)	<p>Identifies the output to be switched. The name can be configured in the WEBFLEET user interface.</p> <p>This parameter is optional. If omitted, the first configured output is used. It is recommended to always use the <code>output_name</code> parameter instead of relying on configuration order.</p>

showWakeupTimers

Description

This action returns a list of days and times that are configured on the LINK 7xx/6xx/5xx/4xx/3xx to wake up the device.

The LINK device can be set to wake up at several times per day. The times defined apply to all the days that are enabled for wake-up.

Technical details

SOAP endpoint address / function name objectsAndPeopleReportingService#showWakeupTimers

Request limits	10 requests / minute
----------------	----------------------

Parameters

showWakeupTimers requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific for showWakeupTimers:

Parameter	Type	Description
objectno	string (10)	<p>Identifying number of an object.</p> <p>Unique within an account, case-sensitive.</p> <p>Can be used alternatively to <code>objectuid</code>.</p>
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated.</p> <p>Can be used alternatively to <code>objectno</code>.</p>

Result

Result for showWakeupTimers:

Parameter	Type	Description
objectno	string (10)	<p>Identifying number of an object.</p> <p>Unique within an account, case-sensitive.</p>

Parameter	Type	Description
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated.
objectname	string (200)	Display name of an object.
mon	boolean	Indicates whether the LINK device is set to wake up at that day. Valid values: <ul style="list-style-type: none">• 0 - LINK set to not wake up• 1 - LINK set to wake up
tue	boolean	See mon.
wed	boolean	See mon.
thu	boolean	See mon.
fri	boolean	See mon.
sat	boolean	See mon.
sun	boolean	See mon.
time1	String (5)	Wake up time in format hh:mm, in the local time zone of the user. If empty, the wake up time is not set.
time2	String (5)	See time1.
time3	String (5)	See time1.
time4	String (5)	See time1.
time5	String (5)	See time1.

updateWakeupTimers

Description

Using `updateWakeupTimers` you can set and change the days and times the specified LINK 7xx/6xx/5xx/4xx/3xx device shall automatically wake up.

The LINK device can be set to wake up at several times per day. The times defined apply to all the days that are enabled for wake-up.

Technical details

SOAP endpoint address / function name `objectsAndPeopleReportingService#updateWakeupTimers`

Request limits	10 requests / minute
----------------	----------------------

Parameters

updateWakeupTimers requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific for updateWakeupTimers:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .
mon	boolean	Indicates whether the LINK device is set to wake up at that day. The parameter can be omitted to leave its value unchanged. Valid values: <ul style="list-style-type: none"> • 0 - LINK set to not wake up • 1 - LINK set to wake up This parameter is optional.
tue	boolean	See mon.
wed	boolean	See mon.
thu	boolean	See mon.
fri	boolean	See mon.
sat	boolean	See mon.
sun	boolean	See mon.
time1	string (5)	Wake up time in format <code>hh:mm</code> , in the local time zone of the user. If empty the existing value will be deleted. When omitted, its existing value will not change.
time2	string (5)	See time1.
time3	string (5)	See time1.
time4	string (5)	See time1.
time5	string (5)	See time1.

getObjectFeatures

Description

`getObjectFeatures` returns all [additional features](#) that are booked for the object. If you specify a feature, `getObjectFeatures` returns all objects that have the indicated additional feature booked.

Technical details

SOAP endpoint address / function name objectsAndPeopleReportingService# getObjectFeatures

Request limits 10 requests / minute

Parameters

`getObjectFeatures` requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific for `getObjectFeatures`:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .
externalid	string	For future use. This parameter is optional.
feature	string	Identifies the feature (additional service): <ul style="list-style-type: none">• linkconnect• hdtracking• waypoints• tachodownload• drivingtime• plugins• orderscheduleoptimization• fmsdirect• tpms• eld• video

Result

Result for `getObjectFeatures`:

feature

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated.
feature	string	Identifies the feature (additional service): <ul style="list-style-type: none">• linkconnect• hdtracking• waypoints• tachodownload• drivingtime• plugins• orderscheduleoptimization• fmsdirect• tpms• eld• video
volume_max	int	Quota limit (if applicable).
volume_used	int	Currently used quota (if applicable).

Parameter	Type	Description
feature_detail	string	<p>The name of the exact variant of an additional feature. This parameter is only available for additional features with multiple variants.</p> <p>Possible values, depending on <code>feature</code></p> <ul style="list-style-type: none"> hdtracking <ul style="list-style-type: none"> • <code>hdtracking_1</code> • <code>hdtracking_2</code> • <code>hdtracking_3</code> • <code>e_toll</code> • <code>e_toll_pl</code> linkconnect <ul style="list-style-type: none"> • <code>linkconnect_xs</code> • <code>linkconnect_s</code> • <code>linkconnect_m</code> • <code>linkconnect_l</code> • <code>linkconnect_xl</code> tachodownload <ul style="list-style-type: none"> • <code>tachoshare_tis_web_plus</code> • <code>tachoshare_tis_web</code> • <code>tachoshare_plus</code> • <code>tachoshare</code> • <code>tachomanager</code> • <code>tachomanager_plus</code> video <ul style="list-style-type: none"> • <code>video_basic</code> • <code>video_plus</code> • <code>video_live</code> • <code>video_basic_int</code> • <code>video_plus_int</code> • <code>video_live_int</code> eld <ul style="list-style-type: none"> • <code>eld_mex</code> • <code>eld_usa</code>

updateContractInfo

Description

Using `updateContractInfo` you can update data that refer to the contract.

Technical details

SOAP endpoint address / function name `objectsAndPeopleReportingService#updateContractInfo`

Request limits	10 requests / minute
----------------	----------------------

Parameters

updateContractInfo requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific for updateContractInfo:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .
referenceno	string (20)	Reference number for the object individually assigned by the customer. This parameter is required.

getObjectCanSignals

Description

`getObjectSignals` returns the latest received CAN signal values for one or more objects in an account. This action will also be useful for FMS when LINK 610/710 are used.

Technical details

SOAP endpoint address / function name `objectsAndPeopleReportingService#getObjectSignals`

Request limits	6 requests / minute
----------------	---------------------

Parameters

getObjectCanSignals requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `getObjectCanSignals`:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .

Parameter	Type	Description
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .

Result

Result for `getObjectCanSignals`:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .
cansignaltime	dateTime	The time the CAN signal was read from the CAN bus of the vehicle.
cansignaltypename	string	Corresponds to a defined list of CAN signal types. All available signals are listed in Appendix F .
cansignaltypedescription	string	Description of CAN signal type
cansignaldatatype	nonNegativeInteger	<ul style="list-style-type: none"> • 1 = Integer • 2 = Decimal • 3 = Boolean
cansignalvalue	float	The value of the CAN signal. Either 0 = false, 1 = true for boolean values or a decimal number for other values like fuel level or battery voltage.

Parameter	Type	Description
cansignalunit	nonNegativeInteger	<p>Indicates the unit of measurement in which cansignalvalue is provided.</p> <p>Valid value are:</p> <ul style="list-style-type: none"> • 0 - Special use (such as bit masks etc.) • 1 - Kilometer per hour • 2 - One per minute • 3 - Kilometer • 4 - Degree Celsius • 5 - Volt • 6 - On/Off • 7 - Percent • 8 - Ampere • 9 - Decimeter • 10 - Hours • 11 - Kilogram • 12 - Kilopascal • 13 - Milliliter • 14 - Liter • 15 - Liter per hour • 16 - Meter • 17 - Minutes • 18 - Newton meter • 19 - Rounds per minute • 20 - Seconds • 21 - Watt-hours

getObjectCanMalfunctions

Description

getObjectCanMalfunctions returns the current state of CAN based malfunctions of an object. This action will also be useful for FMS when a LINK 610/710 are used.

Technical details

SOAP endpoint address / function name objectsAndPeopleReportingService#getObjectCanMalfunctions

Request limits	6 requests / minute
----------------	---------------------

Parameters

getObjectCanMalfunctions requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to getObjectCanMalfunctions:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> . This parameter is optional.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> . This parameter is optional.
objectgroupname	String	The given entry filters the result list on the object groups with matching names. Can be used alternatively to <code>objectgroupid</code> . This parameter is optional.
objectgroupid	String	A unique, unchangeable identifier for the indicated object group, automatically generated. Can be used alternatively to <code>objectgroupname</code> . This parameter is optional.
malfunctionlevel	nonNegativeInteger	Filter by malfunction level. All CAN based malfunctions of the same or higher level are returned. This parameter is optional.

Result

Result for `getObjectCanMalfunctions`:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .

Parameter	Type	Description
malfunctiontype	nonNegativeInteger	<p>Malfunction types.</p> <p>Valid value are:</p> <ul style="list-style-type: none"> • 10 = Battery • 20 = Battery voltage • 30 = Lights • 40 = Exhaust system • 50 = Tyre pressure • 60 = Brake fluid • 70 = Coolant level • 80 = Engine oil level • 90 = Engine oil pressure • 100 = Diesel particulate filter • 110 = Coolant temperature • 120 = Engine cooling • 130 = ABS • 140 = Brake system • 150 = Airbag • 160 = EPC • 170 = ESP • 180 = Preheat or engine malfunction • 190 = Brake pads • 200 = Engine/malfunction indicator lamp • 210 = Transmission failure • 220 = Low coolant level • 230 = Brake failure • 240 = Airbag • 250 = AdBlue level • 260 = Engine oil • 270 = Worn brake linings • 280 = Tyre failure • 290 = Engine oil level low • 300 = Engine emission system failure • 310 = Battery charging condition failure
malfunctionlevel	nonNegativeInteger	<ul style="list-style-type: none"> • 1 = OK • 2 = WARNING • 3 = ERROR

getElectricVehicleData

Description

getElectricVehicleData returns data for all electric vehicles in the account.

Technical details

SOAP endpoint address / function name objectsAndPeopleReportingService#getElectricVehicleData

Request limits 6 requests / minute

Parameters

getElectricVehicleData requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Result

Result for getElectricVehicleData:

Parameter	Type	Description
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated.
batteryLevel	float	Current battery level in percent. Values are within [0.00, 100.00].
estimatedTimeToCharge	dateTime	The moment at which the battery will be fully charged. ISO 8601-formatted date and time.
isCharging	boolean	Status of charging. True when the vehicle is being charged, false otherwise.
range	int	Total range in meters. For hybrid vehicles this is electric range + fuel range.
lastModified	dateTime	Date and time of last signal received from the electric vehicle.

getActiveAssetCouplings

Description

getActiveAssetCouplings returns the active couplings of vehicles and assets.

Technical details

SOAP endpoint address / function name assetCoupling#getActiveAssetCouplings

Request limits 10 requests / minute

Parameters

getActiveAssetCouplings requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `getActiveAssetCouplings`:

Parameter	Type	Description
objectuid	string (30)	A unique, unchangeable identifier for the indicated vehicle or asset, automatically generated. This parameter is optional. If not provided, all active couplings of the account are returned. If view access is not granted, the result is empty.

Result

Result for `getActiveAssetCouplings`:

Parameter	Type	Description
vehicleuid	string (30)	The coupled vehicle. A unique, unchangeable identifier, automatically generated.
assetuid	string (30)	The coupled asset. A unique, unchangeable identifier, automatically generated.
couplingtime	dateTime	The detection time of the coupling event. ISO 8601 -formatted date and time in the UTC time-zone, combined representation in the extended format. Example: 2007-12-24T16:00:00+02:00
longitude	Integer	The longitude of the the coupling event location. Geographic longitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd). Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer. See Geographic coordinate conversion on Wikipedia .
latitude	Integer	The latitude of the the coupling event location. Geographic latitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd). Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer. See Geographic coordinate conversion on Wikipedia .

Orders

sendOrderExtern

Description

The `sendOrderExtern` operation allows you to send an order message to an object. The message is sent asynchronously and therefore a positive result of this operation does not indicate that the message was sent to the object successfully.

Technical details

SOAP endpoint address / function name `ordersService#sendOrder`

Request limits	300 requests / 30 minutes
----------------	---------------------------

Note: On the Driver Terminal, the most recent order is shown at the top of the list of orders. If you tap the **New order** button in the Driving View, the oldest order is listed first.

Parameters

sendOrderExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `sendOrderExtern`:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .
orderid	string (20)	Account-unique order id, case-sensitive. Maximum capacity is 20 bytes, actual number of characters depends on the byte count consumed by the UTF-8 encoding of those characters. This parameter is required.
ordertext	string (500)	This parameter is required.

Parameter	Type	Description
useorderstates	string	<p>Specifies the order states that appear in the workflow of the indicated order.</p> <p>You can specify multiple values for this parameter. Separate the values with a comma when using CSV interface.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 202 - Arrived at destination • 203 - Work started • 204 - Work finished • 205 - Departed from destination • null - The states do not appear in the workflow, even if specified differently in the account settings. <p>If you do not specify this parameter, the account-specific settings are used.</p> <p>This parameter is optional.</p>
orderautomations	int	<p>Specifies the workflow step(s) when starting an order that can be automated.</p> <p>You can specify multiple values for this parameter. Separate the values with a comma when using CSV interface.</p> <hr/> <p><i>Example: orderautomations=1,2</i></p> <hr/> <p>Valid values:</p> <ul style="list-style-type: none"> • 1 - accept the order • 2 - start the order • 3 - navigate to the order destination • 4 - skip displaying the route summary screen • 5 - delete the order after it has been finished • 6 - suppress the "continue with next order" screen <p>If you do not specify this parameter, the account-specific settings are used.</p> <p>This parameter is optional.</p> <p>Available on PRO devices with firmware version 10.533 or higher.</p>
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated.</p> <p>Can be used alternatively to <code>objectno</code>.</p>

sendDestinationOrderExtern

Description

The `sendDestinationOrderExtern` operation allows you to send an order message together with target coordinates for a navigation system connected to the in-vehicle unit. The message is sent asynchronously and therefore a positive result of this operation does not indicate that the message was sent to the object successfully.

Technical details

SOAP endpoint address / function name ordersService#sendDestinationOrder

Request limits 300 requests / 30 minutes

Note: On the Driver Terminal, the most recent order is shown at the top of the list of orders. If you tap the **New order** button in the Driving View, the oldest order is listed first.

Use with ISO8601 date and time formats

If used in conjunction with `useISO8601=true`, you need to take care of specifying the time zone, because otherwise UTC will be assumed by definition. Therefore, you should always provide a time zone definition with `orderdate`, e.g. `2009-01-20T+01:00` and provide your local time part to `ordertime`.

Example for minimal set of parameters

Sends a destination order referring to an address that has been created before with [insertAddressExtern](#). The address must be geocoded.

Code sample 4-2: Minimal set of parameters

CSV

```
https://csv.webfleet.com/extern?account=xxx&username=xxx&password=xxx&apikey=xxx&lang=de&action=sendDestinationOrderExtern&objectno=001&orderid=S-1234.001AF&ordertext=Test&addrnr=401
```

SOAP

```
<soap:Envelope xmlns:soap="http://www.w3.org/2003/05/soap-envelope"
  xmlns:ser="http://connect.webfleet.tomtomwork.com/services">
  <soap:Header/>
  <soap:Body>
    <ser:sendDestinationOrder>
      <aParm>
        <accountName>xxx</accountName>
        <userName>xxx</userName>
        <password>xxx</password>
        <apiKey>xxx</apiKey>
      </aParm>
      <gParm>
        <locale>DE</locale>
        <timeZone>Europe_Berlin</timeZone>
      </gParm>
      <dstOrderToSend orderNo="S-1234.001AF" orderType="" scheduledCompletionDateAndTime="2018-09-21T00:00:00.000+02:00">
        <orderText>Test</orderText>
        <addrNoToUseAsDestination>401</addrNoToUseAsDestination>
      </dstOrderToSend>
      <object objectNo="001"/>
    </ser:sendDestinationOrder>
  </soap:Body>
</soap:Envelope>
```

Example for ISO-formatted order date

Sends a destination order with an scheduled arrival time of 4:30pm on June 5th 2009 in the CEST timezone (Central European Summer Time is 2 hours ahead of UTC). Make sure to quote the + as %2B, otherwise the timezone specification will not parse correctly and the response will contain an error message.

Code sample 4-3: ISO-formatted order date

CSV

```
https://csv.webfleet.com/extern?account=xxx&username=xxx&password=xxx&apikey=xxx&lang=de&action=sendDestinationOrderExtern&object-no=001&orderid=S-1234.002AF&ordertext=Test&addrnr=401&useISO8601=true&orderdate=2009-06-05T02:00&ordertime=16:30:00
```

SOAP

```
<soap:Envelope xmlns:soap="http://www.w3.org/2003/05/soap-envelope"
  xmlns:ser="http://connect.webfleet.tomtomwork.com/services">
  <soap:Body>
    <ser:sendDestinationOrder>
      <aParm>
        <accountName>xxx</accountName>
        <userName>xxx</userName>
        <password>xxx</password>
        <apiKey>xxx</apiKey>
      </aParm>
      <gParm>
        <locale>DE</locale>
        <timeZone>Europe_Berlin</timeZone>
      </gParm>
      <dstOrderToSend orderNo="S-1234.002AF" scheduledCompletionDateAnd-
Time="2009-06-05T16:30:00">
        <orderText>Test</orderText>
        <addrNoToUseAsDestination>401</addrNoToUseAsDestination>
      </dstOrderToSend>
      <object objectNo="001"/>
    </ser:sendDestinationOrder>
  </soap:Body>
</soap:Envelope>
```

Example for destination with latitude and longitude

Sends a destination order; the destination is given by geographical coordinates (51° 21'55,2" N - 12° 23'55,6" E) and a location description is provided for the driver.

Code sample 4-4: Destination with latitude and longitude

CSV

```
https://csv.webfleet.com/extern?account=xxx&username=xxx&password=xxx&apikey=xxx&lang=de&action=sendDestinationOrderExtern&object-no=001&orderid=S-1234.003AF&ordertext=Test&latitude=51365338&longitude=12398799&country=DE&zip=04129&city=Leipzig&street=Maximilianallee 4
```

SOAP

```
<soap:Envelope xmlns:soap="http://www.w3.org/2003/05/soap-envelope"
  xmlns:ser="http://connect.webfleet.tomtomwork.com/services">
  <soap:Body>
    <ser:sendDestinationOrder>
      <aParm>
        <accountName>xxx</accountName>
        <userName>xxx</userName>
        <password>xxx</password>
        <apiKey>xxx</apiKey>
      </aParm>
      <gParm>
        <locale>DE</locale>
        <timeZone>Europe_Berlin</timeZone>
      </gParm>
      <dstOrderToSend orderNo="S-1234.003AF" scheduledCompletionDateAnd-
Time="">
        <orderText>Test</orderText>
        <explicitDestination>
          <street>Maximilianallee 4</street>
        </explicitDestination>
      </dstOrderToSend>
    </ser:sendDestinationOrder>
  </soap:Body>
</soap:Envelope>
```

```

<postcode>04129</postcode>
<city>Leipzig</city>
<country>DE</country>
<geoPosition latitude="51365338" longitude="12398799"/>

<contact contactName="" />
</explicitDestination>
</dstOrderToSend>
<object objectNo="001"/>
</ser:sendDestinationOrder>
</soap:Body>
</soap:Envelope>

```

Parameters

sendDestinationOrderExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to sendDestinationOrderExtern:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .
orderid	string (20)	Account-unique order id, case-sensitive. Maximum capacity is 20 bytes, actual number of characters depends on the byte count consumed by the UTF-8 encoding of those characters. This parameter is required.
ordertext	string (500)	This parameter is required.
ordertype	nonNegativeInteger	Type of order. Valid values: <ul style="list-style-type: none"> • 1 - service order • 2 - pickup order • 3 - delivery order If empty or not present, the default is service order. This parameter is optional.
orderdate	date	Scheduled date of fulfilment for this order. If empty or not present, the default is the current day (calculated using the time zone defined on the WEBFLEET account). This parameter is optional.
ordertime	time	Scheduled time of fulfilment for this order. If empty or not present, the default is 00:00. This parameter is optional.

Parameter	Type	Description
arrivaltolerance	nonNegativeInteger	<p>If there is an active order, the Driver Terminal constantly monitors the ETA and sends notifications messages if the ETA changes significantly. Differences between ETA and <code>ordertime</code> are interpreted as follows:</p> <ul style="list-style-type: none"> • show as standard if: $t_{eta} < t_{order}$ • show as warning if: $t_{order} < t_{eta} < t_{order} + arrivaltolerance$ • show as alarm if: $t_{order} + arrivaltolerance < t_{eta}$ <p>Unit of measurement is minutes.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 0 • 15 • 30 • 60 • 120 <p>Requires <code>ordertime</code> and <code>orderdate</code>. This parameter is optional.</p>
notify_enabled	boolean	<p>If set to 1 enables generation of an event (Events) as soon as the ETA is lower than <code>notify_leadtime</code>. This parameter is optional.</p>
notify_leadtime	nonNegativeInteger	<p>Time in minutes before arrival at destination at which an event (Events) is generated if <code>notify_enabled</code> is set to 1. This parameter is optional.</p>
contact	string (50)	<p>Name of a contact person for this order. This parameter is optional.</p>
contacttel	string (20)	<p>Phone number of the contact person for this order. Must conform to the following format: <code>\+? ([\d / \(\) \-]) +</code> (a sequence of numbers and () / - that may be proceeded by a +). This parameter is optional.</p>

Parameter	Type	Description
addrnr	string (10)	<p>Use an address identified by addrnr as returned by showAddressReportExtern. The address must be geocoded.</p> <p>Case-sensitive.</p> <p>Note: If addrnr is provided, other parameters describing the destination (longitude, latitude, country, zip, city, street, contact, contactTel) are ignored and replaced by the respective values from the address record identified by addrnr.</p>
		This parameter is optional.
longitude	int	<p>Geographic longitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
latitude	int	<p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
country	string (2)	ISO 3166-1 alpha-2 code for the country (capital letters). Country of the destination address; used only for display to the driver.
zip	string (10)	Post code of the destination address; used only for display to the driver.
city	string (50)	City of the destination address; used only for display to the driver.
street	string (50)	Street and house number of the destination address; used only for display to the driver.

Parameter	Type	Description
useorderstates	string	<p>Specifies the order states that appear in the workflow of the indicated order. You can specify multiple values for this parameter. Separate the values with comma when using CSV interface.</p> <p>Valid values:</p> <p>null - Below states do not appear in workflow, even if specified differently in the account settings.</p> <p>For <code>ordertype = 1</code>:</p> <ul style="list-style-type: none"> • 202 - Arrived at destination • 203 - Work started • 204 - Work finished • 205 - Departed from destination <p>For <code>ordertype = 2</code>:</p> <ul style="list-style-type: none"> • 222 - Arrived at pick up location • 223 - Pick up started • 224 - Pick up finished • 225 - Departed from pick up location <p>For <code>ordertype = 3</code>:</p> <ul style="list-style-type: none"> • 242 - Arrived at delivery location • 243 - Delivery started • 244 - Delivery finished • 245 - Departed from delivery location <p>Note: If you do not specify the parameter, the account specific settings are used.</p> <p>This parameter is optional.</p>

Parameter	Type	Description
orderautomations	int	<p>Specifies the workflow step(s) when starting an order that can be automated. You can specify multiple values for this parameter. Separate the values with a comma when using CSV interface.</p> <hr/> <p><i>Example:</i> <code>orderautomations=1,2</code></p> <hr/> <p>Valid values:</p> <ul style="list-style-type: none"> • 1 - accept the order • 2 - start the order • 3 - navigate to the order destination • 4 - skip displaying the route summary screen • 5 - delete the order after it has been finished • 6 - suppress the "continue with next order" screen <div style="background-color: #f0f0f0; padding: 10px; margin-top: 10px;"> <p>Note: If you do not specify the parameter, the account specific settings are used.</p> </div> <p>This parameter is optional. Available on PRO devices with firmware version 10.533 or higher.</p>

Parameter	Type	Description
wp	string	<p>Contains details for a waypoint for orders with pre-defined routes (itinerary) in the following format:</p> <pre><latitude>,<longitude>,[<description>],[<notify>],[<visible>]</pre> <p>For details of the parameters contained, see Parameters in wp.</p> <p>The number of waypoints per order is limited:</p> <ul style="list-style-type: none"> • The following devices support up to 1000 waypoints per order: <ul style="list-style-type: none"> ◦ TomTom PRO 7100/7150 ◦ TomTom PRO 9100/9150 ◦ TomTom PRO 5150 • The following devices support up to 250 waypoints per order: <ul style="list-style-type: none"> ◦ PRO 8475 ◦ PRO 8375 ◦ TomTom PRO 8270/8275 ◦ PRO 7350 ◦ PRO 5350 • The following devices do not support waypoints: <ul style="list-style-type: none"> ◦ TomTom PRO 5250, TomTom PRO 7250 <p>The number of waypoints/vehicle/month is limited to 20,000. If you exceed this limit this action will return with response code 25001.</p> <p>This parameter is optional.</p>
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated.</p> <p>Can be used alternatively to <code>objectno</code>.</p>
mapcode	string (20)	<p>A mapcode represents a location.</p> <p>Either <code>mapcode</code> or <code>latitude/longitude</code> coordinates can be used, but not both.</p> <p>Learn more about mapcodes.</p>

updateOrderExtern

Description

Updates an order that was submitted with `sendOrderExtern`.

Technical details

SOAP endpoint address / function name ordersService#updateOrder

Request limits 300 requests / 30 minutes

Parameters

updateOrderExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to updateOrderExtern:

Parameter	Type	Description
orderid	string (20)	Account-unique order id, case-sensitive. Maximum capacity is 20 bytes, actual number of characters depends on the byte count consumed by the UTF-8 encoding of those characters. This parameter is required.
ordertext	string (500)	This parameter is required.
orderautomations	int	Specifies the workflow step(s) when starting an order that can be automated. You can specify multiple values for this parameter. Separate the values with a comma when using CSV interface. Important: Updating the order automation exclusively affects orders that are being sent to the device.
<hr/> <i>Example: orderautomations=1,2</i> <hr/>		
Valid values: <ul style="list-style-type: none">• 1 - accept the order• 2 - start the order• 3 - navigate to the order destination• 4 - skip displaying the route summary screen• 5 - delete the order after it has been finished• 6 - suppress the "continue with next order" screen		
<p>Note: If you do not specify this parameter, the account-specific settings are used.</p>		
This parameter is optional. Available on PRO devices with firmware version 10.533 or higher.		

updateDestinationOrderExtern

Description

Updates an order that was submitted with `sendDestinationOrderExtern` or with `insertDestinationOrderExtern`.

Technical details

SOAP endpoint address / function name	ordersService#updateDestinationOrder
Request limits	300 requests / 30 minutes

Parameters

updateDestinationOrderExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `updateDestinationOrderExtern`:

Parameter	Type	Description
orderid	string (20)	Account-unique order id, case-sensitive. Maximum capacity is 20 bytes, actual number of characters depends on the byte count consumed by the UTF-8 encoding of those characters. This parameter is required.
ordertext	string (500)	This parameter is optional.
orderdate	date	Scheduled date of fulfilment for this order. If empty or not present, the default is the current day (calculated using the time zone defined on the WEBFLEET account). This parameter is optional.
ordertime	time	Scheduled time of fulfilment for this order. If empty or not present, the default is 00:00. This parameter is optional.

Parameter	Type	Description
arrivaltolerance	nonNegativeInteger	<p>If there is an active order, the Driver Terminal constantly monitors the ETA and sends notifications messages if the ETA changes significantly. Differences between ETA and <code>ordertime</code> are interpreted as follows:</p> <ul style="list-style-type: none"> • show as standard if: $t_{eta} < t_{order}$ • show as warning if: $t_{order} < t_{eta} < t_{order} + arrivaltolerance$ • show as alarm if: $t_{order} + arrivaltolerance < t_{eta}$ <p>Unit of measurement is minutes.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 0 • 15 • 30 • 60 • 120 <p>Requires <code>ordertime</code> and <code>orderdate</code>. This parameter is optional.</p>
contact	string (50)	<p>Name of a contact person for this order. This parameter is optional.</p>
contacttel	string (20)	<p>Phone number of the contact person for this order. Must conform to the following format:</p> <pre>\+?([\d / \(\) \-]) +</pre> <p>(a sequence of numbers and () / - that may be proceeded by a +). This parameter is optional.</p>
addrnr	string (10)	<p>Use an address identified by <code>addrnr</code> as returned by showAddressReportExtern. The address must be geocoded. Case-sensitive.</p> <p>Note: If <code>addrnr</code> is provided, other parameters describing the destination (<code>longitude</code>, <code>latitude</code>, <code>country</code>, <code>zip</code>, <code>city</code>, <code>street</code>, <code>contact</code>, <code>contectTel</code>) are ignored and replaced by the respective values from the address record identified by <code>addrnr</code>.</p> <p>This parameter is optional.</p>

Parameter	Type	Description
longitude	int	<p>Geographic longitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
latitude	int	<p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
country	string (2)	<p>ISO 3166-1 alpha-2 code for the country (capital letters).</p> <p>Country of the destination address; used only for display to the driver.</p>
zip	string (10)	Post code of the destination address; used only for display to the driver.
city	string (50)	City of the destination address; used only for display to the driver.
street	string (50)	Street and house number of the destination address; used only for display to the driver.

Parameter	Type	Description
orderautomations	int	<p>Specifies the workflow step(s) when starting an order that can be automated. You can specify multiple values for this parameter. Separate the values with a comma when using CSV interface.</p> <p>Important: Updating the order automation exclusively affects orders that are being sent to the device.</p> <hr/> <p><i>Example: orderautomations=1,2</i></p> <hr/> <p>Valid values:</p> <ul style="list-style-type: none"> • 1 - accept the order • 2 - start the order • 3 - navigate to the order destination • 4 - skip displaying the route summary screen • 5 - delete the order after it has been finished • 6 - suppress the "continue with next order" screen <div style="background-color: #f2f2f2; padding: 10px; margin-top: 10px;"> <p>Note: If you do not specify this parameter, the account-specific settings are used.</p> </div> <p>This parameter is optional. Available on PRO devices with firmware version 10.533 or higher.PRO 8475</p>

Parameter	Type	Description
wp	string	<p>Contains details for a waypoint for orders with pre-defined routes (itinerary) in the following format. This parameter is optional.</p> <pre><latitude>,<longitude>,[<description>],[<notify>],[<visible>]</pre> <p>For details of the parameters contained, see Parameters in wp in sendDestinationOrderExtern.</p> <p>The number of waypoints per order is limited:</p> <ul style="list-style-type: none"> • The following devices support up to 1000 waypoints per order: <ul style="list-style-type: none"> ◦ TomTom PRO 7100/7150 ◦ TomTom PRO 9100/9150 ◦ TomTom PRO 5150 • The following devices support up to 250 waypoints per order: <ul style="list-style-type: none"> ◦ PRO 8475 ◦ PRO 8375 ◦ TomTom PRO 8270/8275 ◦ PRO 7350 ◦ PRO 5350 • The following devices do not support waypoints: <ul style="list-style-type: none"> ◦ TomTom PRO 5250, TomTom PRO 7250 <p>Note: The number of waypoints/vehicle/month is limited to 20,000.</p>
mapcode	string (20)	<p>A mapcode represents a location. Either mapcode or latitude/longitude coordinates can be used but not both. Learn more about mapcodes.</p>

insertDestinationOrderExtern

Description

The `insertDestinationOrderExtern` operation allows you to transmit an order message to WEBFLEET. The message is not sent and must be manually dispatched to an object within WEBFLEET.

Technical details

SOAP endpoint address / function name `ordersService#insertDestinationOrder`

Request limits	300 requests / 30 minutes
----------------	---------------------------

Parameters

insertDestinationOrderExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to insertDestinationOrderExtern:

Parameter	Type	Description
orderid	string (20)	Account-unique order id, case-sensitive. Maximum capacity is 20 bytes, actual number of characters depends on the byte count consumed by the UTF-8 encoding of those characters. This parameter is required.
ordertext	string (500)	This parameter is required.
ordertype	nonNegativeInteger	Type of order. Valid values: <ul style="list-style-type: none">• 1 - service order• 2 - pickup order• 3 - delivery order If empty or not present, the default is service order. This parameter is optional.
orderdate	date	Scheduled date of fulfilment for this order. If empty or not present, the default is the current day (calculated using the time zone defined on the WEBFLEET account). This parameter is optional.
ordertime	time	Scheduled time of fulfilment for this order. If empty or not present, the default is 00:00. This parameter is optional.

Parameter	Type	Description
arrivaltolerance	nonNegativeInteger	<p>If there is an active order, the Driver Terminal constantly monitors the ETA and sends notifications messages if the ETA changes significantly. Differences between ETA and <code>ordertime</code> are interpreted as follows:</p> <ul style="list-style-type: none"> • show as standard if: $t_{eta} < t_{order}$ • show as warning if: $t_{order} < t_{eta} < t_{order} + arrivaltolerance$ • show as alarm if: $t_{order} + arrivaltolerance < t_{eta}$ <p>Unit of measurement is minutes.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 0 • 15 • 30 • 60 • 120 <p>Requires <code>ordertime</code> and <code>orderdate</code>. This parameter is optional.</p>
notify_enabled	boolean	<p>If set to 1 enables generation of an event (Events) as soon as the ETA is lower than <code>notify_leadtime</code>. This parameter is optional.</p>
notify_leadtime	nonNegativeInteger	<p>Time in minutes before arrival at destination at which an event (Events) is generated if <code>notify_enabled</code> is set to 1. This parameter is optional.</p>
contact	string (50)	<p>Name of a contact person for this order. This parameter is optional.</p>
contacttel	string (20)	<p>Phone number of the contact person for this order. Must conform to the following format: <code>\+? ([\d /\\(\)\ -]) +</code> (a sequence of numbers and () / - that may be proceeded by a +). This parameter is optional.</p>

Parameter	Type	Description
addrnr	string (10)	<p>Use an address identified by <code>addrnr</code> as returned by showAddressReportExtern.</p> <p>The address must be geocoded. Case-sensitive.</p> <p>Note: If <code>addrnr</code> is provided, other parameters describing the destination (<code>longitude</code>, <code>latitude</code>, <code>country</code>, <code>zip</code>, <code>city</code>, <code>street</code>, <code>contact</code>, <code>contectTel</code>) are ignored and replaced by the respective values from the address record identified by <code>addrnr</code>.</p>
		This parameter is optional.
longitude	int	<p>Geographic longitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
latitude	int	<p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
country	string (2)	<p>ISO 3166-1 alpha-2 code for the country (capital letters).</p> <p>Country of the destination address; used only for display to the driver.</p>
zip	string (10)	Post code of the destination address; used only for display to the driver.
city	string (50)	City of the destination address; used only for display to the driver.
street	string (50)	Street and house number of the destination address; used only for display to the driver.

Parameter	Type	Description
wp	string	<p>Contains details for a waypoint for orders with pre-defined routes (itinerary) in the following format. This parameter is optional.</p> <pre><latitude>,<longitude>,[<description>],[<notify>],[<visible>]</pre> <p>For details of the parameters contained, see Parameters in wp in sendDestinationOrderExtern.</p> <p>The number of waypoints per order is limited:</p> <ul style="list-style-type: none"> • The following devices support up to 1000 waypoints per order: <ul style="list-style-type: none"> ◦ TomTom PRO 7100/7150 ◦ TomTom PRO 9100/9150 ◦ TomTom PRO 5150 • The following devices support up to 250 waypoints per order: <ul style="list-style-type: none"> ◦ PRO 8475 ◦ PRO 8375 ◦ TomTom PRO 8270/8275 ◦ PRO 7350 ◦ PRO 5350 • The following devices do not support waypoints: <ul style="list-style-type: none"> ◦ TomTom PRO 5250, TomTom PRO 7250 <p>Note: The number of waypoints/vehicle/month is limited to 20,000.</p>
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated.</p> <p>Can be used alternatively to <code>objectno</code>.</p>
mapcode	string (20)	<p>A mapcode represents a location.</p> <p>Either <code>mapcode</code> or <code>latitude/longitude</code> coordinates can be used but not both.</p> <p>Learn more about mapcodes.</p>

cancelOrderExtern

Description

Cancels orders that were submitted using one of `sendDestinationOrderExtern`, `insertDestinationOrderExtern` or `sendOrderExtern`.

Technical details

SOAP endpoint address / function name ordersService#cancelOrder

Request limits 300 requests / 30 minutes

Parameters

cancelOrderExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to cancelOrderExtern:

Parameter	Type	Description
orderid	string (20)	Account-unique order id, case-sensitive. Maximum capacity is 20 bytes, actual number of characters depends on the byte count consumed by the UTF-8 encoding of those characters.

assignOrderExtern

Description

Assigns an existing order to an object and can be used to accomplish the following:

- send an order that was inserted before using `insertDestinationOrderExtern`
- resend an order that has been rejected or cancelled

Technical details

SOAP endpoint address / function name ordersService#assignOrder

Request limits 300 requests / 30 minutes

Parameters

assignOrderExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to assignOrderExtern:

Parameter	Type	Description
orderid	string (20)	Account-unique order id, case-sensitive. Maximum capacity is 20 bytes, actual number of characters depends on the byte count consumed by the UTF-8 encoding of those characters. This parameter is required.

Parameter	Type	Description
objectno	string (10)	<p>Identifying number of an object. Unique within an account, case-sensitive.</p> <p>This <code>objectno</code> names the object that will receive the order. Required if the order is not linked to an object yet.</p> <p>This parameter is optional.</p>
orderautomations	int	<p>Specifies the workflow step(s) when starting an order that can be automated.</p> <p>You can specify multiple values for this parameter. Separate the values with a comma when using CSV interface.</p> <p><i>Example: orderautomations=1,2</i></p> <p>Valid values:</p> <ul style="list-style-type: none"> • 1 - accept the order • 2 - start the order • 3 - navigate to the order destination • 4 - skip displaying the route summary screen • 5 - delete the order after it has been finished • 6 - suppress the "continue with next order" screen <p>Note: If you do not specify this parameter, the account-specific settings are used.</p> <p>This parameter is optional. Available on PRO devices with firmware version 10.533 or higher.</p>
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated.</p> <p>Can be used alternatively to <code>objectno</code>.</p>

reassignOrderExtern

Description

Reassigns an order that was submitted using one of [sendDestinationOrderExtern](#), [insertDestinationOrderExtern](#) or [sendOrderExtern](#) to another object. This is done by cancelling the order on the old object that is currently assigned to this order and assigning the new object to the order. The order is then sent to the new object.

Technical details

SOAP endpoint address / function name ordersService#reassignOrder

Request limits	300 requests / 30 minutes
----------------	---------------------------

Parameters

reassignOrderExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to reassignOrderExtern:

Parameter	Type	Description
orderid	string (20)	<p>Account-unique order id, case-sensitive. Maximum capacity is 20 bytes, actual number of characters depends on the byte count consumed by the UTF-8 encoding of those characters.</p> <p>This parameter is required.</p>
objectid	string (10)	<p>Identifying number of an object. Unique within an account, case-sensitive. This <code>objectid</code> (which is equal to <code>objectno</code>) names the object that will receive the order.</p> <p>This parameter is required.</p>
orderautomations	int	<p>Specifies the workflow step(s) when starting an order that can be automated. You can specify multiple values for this parameter. Separate the values with a comma when using CSV interface.</p> <hr/> <p><i>Example: orderautomations=1,2</i></p> <hr/> <p>Valid values:</p> <ul style="list-style-type: none"> • 1 - accept the order • 2 - start the order • 3 - navigate to the order destination • 4 - skip displaying the route summary screen • 5 - delete the order after it has been finished • 6 - suppress the "continue with next order" screen <p>If you do not specify this parameter, the account-specific settings are used.</p> <p>This parameter is optional.</p> <p>Available on PRO devices with firmware version 10.533 or higher.</p>
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated.</p> <p>Can be used alternatively to <code>objectid</code>.</p>

deleteOrderExtern

Description

Deletes an order from a device and optionally marks it as deleted in WEBFLEET too.

Supported for the stand-alone Driver Terminals connected to WEBFLEET and the Driver Terminals connected to LINK 7xx/5xx/4xx/3xx.

Technical details

SOAP endpoint address / function name ordersService#deleteOrder

Request limits 300 requests / 30 minutes

Parameters

deleteOrderExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to deleteOrderExtern:

Parameter	Type	Description
orderid	string (20)	Account-unique order id, case-sensitive. Maximum capacity is 20 bytes, actual number of characters depends on the byte count consumed by the UTF-8 encoding of those characters.
mark_deleted	boolean	If set to 1, the order is deleted in WEBFLEET and the order ID can be used again. Defaults to 0.

clearOrdersExtern

Description

Removes all orders from the device and optionally deletes them all in WEBFLEET too.

Technical details

SOAP endpoint address / function name ordersService#clearOrders

Request limits 300 requests / 30 minutes

Parameters

clearOrdersExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to clearOrdersExtern:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case sensitive.

Parameter	Type	Description
mark_deleted	boolean	If set to 1, the orders are deleted in WEBFLEET too and the order IDs can be used again. Defaults to 0.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to objectno.

showOrderReportExtern

Description

Shows a list of orders that match the search parameters. Each entry shows the order details and current status information.

Technical details

SOAP endpoint address / function name ordersService#showOrderReport

Request limits	6 requests / minute
----------------	---------------------

Example - Retrieve all orders for the previous week

Uses a range_pattern to access all orders with an orderdate within the last week.

Code sample 4-5: Retrieve all orders for the previous week

CSV

```
https://csv.webfleet.com/extern?account=xxx&username=xxx&password=xxx&apiKey=xxx&lang=de&action=showOrderReportExtern&range_pattern=w-1
```

SOAP

```
<soap:Envelope xmlns:soap="http://www.w3.org/2003/05/soap-envelope"
  xmlns:ser="http://connect.webfleet.tomtomwork.com/services">
<soap:Header/>
<soap:Body>
  <ser:showOrderReport>
    <aParm>
      <accountName>xxx</accountName>
      <userName>xxxx</userName>
      <password>xxxx</password>
      <apiKey>xxx</apiKey>
    </aParm>
    <gParm>
      <locale>DE</locale>
      <timeZone>Europe_Berlin</timeZone>
    </gParm>
    <queryFilter>
      <object objectNo="" objectUid="" externalId="" />
      <dateRange rangePattern="Wm1"></dateRange>
    </queryFilter>
  </ser:showOrderReport>
</soap:Body>
</soap:Envelope>
```

Example - Retrieve orders for a specific object and day

Uses a user-defined (ud) range_pattern with ISO-formatting to access all orders with a specific order-date assigned to a specific object.

Code sample 4-6: Retrieve orders for a specific object and day

CSV

```
https://csv.webfleet.com/extern?account=xxx&username=xxx&password=xxx&apikey=xxx&lang=de&action=showOrderReportExtern&objectno=001&useISO8601=true&range_pattern=ud&range_from_string=2009-06-11T00:00:00&range_to_string=2009-06-11T23:59:59
```

SOAP

```
<soap:Envelope xmlns:soap="http://www.w3.org/2003/05/soap-envelope"
  xmlns:ser="http://connect.webfleet.tomtomwork.com/services">
<soap:Header/>
<soap:Body>
  <ser:showOrderReport>
    <aParm>
      <accountName>xxx</accountName>
      <userName>xxx</userName>
      <password>xxx</password>
      <apiKey>xxx</apiKey>
    </aParm>
    <gParm>
      <locale>DE</locale>
      <timeZone>Europe_Berlin</timeZone>
    </gParm>
    <queryFilter>
      <object objectNo="001"/>
      <dateRange rangePattern="UD">
        <from>2009-06-11T00:00:00.000+01:00</from>
        <to>2009-06-11T23:59:59.000+01:00</to>
      </dateRange>
    </queryFilter>
  </ser:showOrderReport>
</soap:Body>
</soap:Envelope>
```

Parameters

showOrderReportExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

The following other parameters are required if `orderid` is not indicated:

- [Date range filter parameters](#)

Parameters specific to showOrderReportExtern:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. This parameter is optional.

Parameter	Type	Description
objectgroupname	string	Case-sensitive. This parameter is optional.
orderid	string (20)	Account-unique order id, case-sensitive. Maximum capacity is 20 bytes, actual number of characters depends on the byte count consumed by the UTF-8 encoding of those characters. This parameter is optional.
ordertype	nonNegativeInteger	Type of order. Valid values: <ul style="list-style-type: none">• 1 - service order• 2 - pickup order• 3 - delivery order This parameter is optional.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .

Result

Result for `showOrderReportExtern`:

Parameter	Type	Description
orderdate	date	Scheduled date of fulfilment for this order. If empty or not present, the default is the current day (calculated using the time zone defined on the WEBFLEET account).
orderid	string (20)	Account-unique order id, case-sensitive. Maximum capacity is 20 bytes, actual number of characters depends on the byte count consumed by the UTF-8 encoding of those characters.
ordertext	string (500)	
ordertype	nonNegativeInteger	Type of order. Valid values: <ul style="list-style-type: none">• 1 - service order• 2 - pickup order• 3 - delivery order
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
objectname	string	Display name of an object.

Parameter	Type	Description
longitude	int	<p>Geographic longitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
latitude	int	<p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
destination	string	
orderstate	nonNegativeInteger	<p>Valid values:</p> <ul style="list-style-type: none"> • 0 - Not yet sent • 100 - Sent • 101 - Received • 102 - Read • 103 - Accepted • 201 - Service order started • 202 - Arrived at destination • 203 - Work started • 204 - Work finished • 205 - Departed from destination • 221 - Pickup order started • 222 - Arrived at pick up location • 223 - Pick up started • 224 - Pick up finished • 225 - Departed from pick up location • 241 - Delivery order started • 242 - Arrived at delivery location • 243 - Delivery started • 244 - Delivery finished • 245 - Departed from delivery location • 298 - Resumed • 299 - Suspended • 301 - Cancelled • 302 - Rejected • 401 - Finished
orderstate_time	string	

Parameter	Type	Description
orderstate_longitude	int	<p>Geographic longitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
orderstate_latitude	int	<p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
orderstate_postext	string	
orderstate_msgtext	string	<p>String containing the message text of the last order related message.</p>
planned_arrival_time	time	<p>Scheduled time of fulfillment for this order.</p> <p>If empty or not present, the default is 00:00.</p>
estimated_arrival_time	time	<p>Scheduled time of fulfillment for this order.</p> <p>If empty or not present, the default is 00:00.</p>
arrivaltolerance	time	
notify_enabled	boolean	
notify_leadtime	nonNegativeInteger	
delay_warnings	nonNegativeInteger	<p>Warning state based on planned and estimated arrival time and the arrival time tolerance value. Possible values are:</p> <ul style="list-style-type: none"> • 1 - Estimated delay within tolerance. • 2 - Estimated delay above tolerance.
contact	string	<p>Name of the contact person.</p>
contacttel	string (20)	<p>Phone number of the contact person for this order.</p>
driverno	string	<p>Identifying number of a driver. Unique within an account. See Drivers to learn more about drivers.</p> <p>Assigned to the driver who reported working on the order most recently.</p>
drivername	string	<p>Display name of a driver.</p> <p>Assigned to the driver who reported working on the order most recently.</p>
drivertelmobile	string	<p>Mobile phone number of the driver. Associated to the order.</p> <p>Assigned to the driver who reported working on the order most recently.</p>

Parameter	Type	Description
waypointcount	nonNegativeInteger	The number of waypoints in an itinerary order.
addrnr	string (10)	Identifying number of an address. Unique within an account. Number of the destination address. Only returned when the order destination is identified by the address number.
country	string (2)	ISO 3166-1 alpha-2 code for the country (capital letters). Country of the destination address.
zip	string (10)	Post code of the destination address.
city	string (250)	City of the destination address.
street	string (250)	Street and house number of the destination address.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .
driveruid	string	A unique, unchangeable identifier for the indicated driver, automatically generated. Can be used alternatively to <code>driverno</code> .
mapcode	string (20)	A mapcode represents a location. Learn more about mapcodes .

showOrderWaypoints

Description

This action retrieves the waypoints for an itinerary order with additional information on the validity and state. The waypoints are sorted in the same order which was used when creating the itinerary.

Itinerary orders (predefined routes over the air) are supported on all Driver Terminals with software version 10.537 or higher.

Technical details

SOAP endpoint address / function name `ordersService#showOrderWaypoints`

Request limits	10 requests / minute
----------------	----------------------

Parameters

showOrderWaypoints requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to showOrderWaypoints:

Parameter	Type	Description
orderid	string (20)	<p>Account-unique order id, case-sensitive. Maximum capacity is 20 bytes, actual number of characters depends on the byte count consumed by the UTF-8 encoding of those characters.</p> <p>This parameter is mandatory.</p>

Result

Result for showOrderWaypoints:

Parameter	Type	Description
waypointnumber	string	Automatically generated ordering number.
latitude	int	
longitude	int	
formatted_latitude	string	<p>Human readable formatted latitude. Geographic latitude in the form GGG° MM' SS.S" N/S in the WGS84 coordinate system.</p>
formatted_longitude	string	<p>Human readable formatted longitude Geographic longitude in the form GGG° MM' SS.S" E/W in the WGS84 coordinate system.</p>
description	string (20)	Short waypoint description.
notify	Boolean	<p>Indicates whether the driver gets a notification when the waypoint is passed. Default is 1. Valid values:</p> <ul style="list-style-type: none"> • 0 - false • 1 - true (driver will be notified when passing this waypoint)
visible	Boolean	<p>Indicates whether the waypoint is visible on the navigation device. Default is 1. Valid values:</p> <ul style="list-style-type: none"> • 0 - false • 1 - true (waypoint is visible in the list of waypoints on the navigation device)
state	int	<p>Indicates whether the waypoint was valid for a route calculation on the navigation device. Valid values:</p> <ul style="list-style-type: none"> • 0 - normal • 1 - rejected

Parameters in wp

Parameter	Type	Description
latitude	int	<p>Geographic latitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd). Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer. See Geographic coordinate conversion on Wikipedia. This parameter is required.</p>
longitude	int	<p>Geographic longitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd). Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer. See Geographic coordinate conversion on Wikipedia. This parameter is required.</p>
description	string (20)	<p>Short waypoint description. This parameter is optional.</p>
notify	Boolean	<p>Note: This parameter is not supported any more on newer devices. The use is discouraged.</p> <p>Indicates whether the driver gets a notification when the waypoint is passed. Default is 1. Valid values:<ul style="list-style-type: none"> • 0 - false • 1 - true (driver will be notified when passing the waypoint) This parameter is optional.</p>
visible	Boolean	<p>Note: This parameter is not supported any more on newer devices. The use is discouraged.</p> <p>Indicates whether the waypoint is visible on the navigation device. Default is 1. Valid values:<ul style="list-style-type: none"> • 0 - false • 1 - true (waypoint is visible in the list of waypoints on the navigation device) This parameter is optional.</p>

Messages

sendTextMessageExtern

Description

The **sendTextMessageExtern** operation allows you to send a text message to an object. The message is sent asynchronously and therefore a positive result of this operation does not indicate that the message was sent to the object successfully.

Technical details

SOAP endpoint address / function name messagesService#sendTextMessage

Request limits	300 requests / 30 minutes
----------------	---------------------------

Parameters

sendTextMessageExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to **sendTextMessageExtern**:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
messagetext	string (500)	
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .

clearTextMessagesExtern

Description

Removes all text messages from the device.

Technical details

SOAP endpoint address / function name messagesService#clearTextMessages

Request limits	300 requests / 30 minutes
----------------	---------------------------

Parameters

clearTextMessagesExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to clearTextMessagesExtern:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .

showMessages

Description

Using `showMessages` you can retrieve exclusively text, order, or text status messages without using the queue service. The maximum result size is limited to 500 entries. To get an additional batch of messages the date range parameter has to be changed.

Technical details

SOAP endpoint address / function name `messagesService#showMessages`

Request limits 10 requests / minute

Parameters

showMessages requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)
- [Date range filter parameters](#) (lower limit is 14x24h back)

Parameters specific to showMessages:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. This parameter is optional

Parameter	Type	Description
category	int	<p>Valid values:</p> <ul style="list-style-type: none"> • 1 - text messages • 2 - order status messages • 3 - text status messages <p>This parameter is optional.</p>
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated.</p> <p>Can be used alternatively to <code>objectno</code>.</p> <p>This parameter is optional.</p>

Result

Result for `showMessages`:

Parameter	Type	Description
msgid	int	<p>Identifies a message and is unique within the system.</p> <p>Possible values are in the range $0 \leq \text{msgid} \leq 2^{64}-1$</p>
msg_time	dateTime	<p>ISO 8601-formatted date and time in the UTC timezone, combined representation in the extended format.</p> <p>Example: 2007-12-24T16:00:00+02:00</p>
msg_flag	string	<ul style="list-style-type: none"> • Valid values: • S = sent • R = received
msg_category	int	<ul style="list-style-type: none"> • Valid values: • 1 - text messages • 2 - order status messages • 3 - text status messages
msg_text	string	The text of the message.
msg_refid	int	The message ID reference to the original message (if available).
msg_reftype	int	<ul style="list-style-type: none"> • Valid values: • 1 - received • 2 - read • 3 - discarded <p>Only in use if <code>msg_refid</code> exists, otherwise empty.</p>
objectno	string (10)	<p>Identifying number of an object.</p> <p>Unique within an account, case-sensitive.</p>

Parameter	Type	Description
pos_time	dateTime	<p>ISO 8601-formatted date and time in the UTC timezone, combined representation in the extended format.</p> <hr/> <p>Example: 2007-12-24T16:00:00+02:00</p> <hr/>
pos_latitude	int	<p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
pos_longitude	int	<p>Geographic longitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
pos_text	string	A detailed textual description of the location.
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated.</p> <p>Can be used alternatively to <code>objectno</code>.</p>

sendBinaryMessage

Description

`sendBinaryMessage` sends a maximum of 2560 byte raw data to a the driver terminal. The base64 encoding required for transmission of binary messages through the web service API does not count as raw payload data size. Be aware that there can only be one pending binary message for a driver terminal at a time.

Further calls of `sendBinaryMessage` for the same driver terminal will be rejected until the data is transferred to the driver terminal.

To track the status of the binary message, please use the WEBFLEET.connect Queue Service.

Note: To run `sendBinaryMessage`, an API key and the LINK.connect feature is required.

This action is supported on PRO 83xx/TomTom PRO 82xx devices only.

To use this action, you need to have the additional service LINK.connect booked. The data volume caused through `sendBinaryMessage` should be covered by the data volume of the selected LINK.connect tariff.

Technical details

SOAP endpoint address / function name `messagesService#sendBinaryMessages`

Request limits	10 requests / minute
----------------	----------------------

Parameters

sendBinaryMessages requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to sendBinaryMessage:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .
appid	string (128)	An identifier to mark the application on the destination device. Note: Use package style for example com.vendor.application.part This parameter is required.
correlationid	int	An arbitrary identifier that helps to identify WEBFLEET messages in the message queue service that belong to this request. Should be unique in the integration server backend. This parameter is optional.
data	base64 (raw (2560))	Base64 encoded user payload, max. 2.5 KB. The data is not interpreted by WEBFLEET. This parameter is required.

resetBinaryMessages

Description

If the driver terminal does not respond to outgoing data sent using [sendBinaryMessage](#) the transfer status is incomplete. `resetBinaryMessages` resets the outgoing data transfer and gets back to a consistent state between integration server backend and device. This is important because you cannot send new data until the current transfer is completed or cancelled/reset.

If the binary data to be delivered with the original send is still important from the view of the PRO.connect integration solution, the integration server backend should repeat the `sendBinaryMessages` operation after the reset.

Note: This action is supported on PRO 83xx/TomTom PRO 82xx devices only. To use this action, you need to have the additional service LINK.connect booked.

Technical details

SOAP endpoint address / function name messagesService#resetBinaryMessages

Request limits	10 requests / minute
----------------	----------------------

Parameters

resetBinaryMessages requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to resetBinaryMessage:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .

clearBinaryMessages

Description

`clearBinaryMessages` removes data from the outgoing queue on the driver terminal. This can be used to remove stale data for applications on the driver terminal that do not exist anymore or that are unlikely to connect anymore.

`clearBinaryMessages` is needed because the driver terminal does not remove outgoing data by itself as it cannot decide if an application will connect sometime.

Note: This action is supported on PRO 83xx/TomTom PRO 82xx devices only. To use this action, you need to have the additional service `LINK.connect` booked.

Technical details

SOAP endpoint address / function name messagesService#clearBinaryMessages

Request limits	10 requests / minute
----------------	----------------------

Parameters

clearBinaryMessages requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to clearBinaryMessages:

Parameter	Type	Description
objectno	string (10)	<p>Identifying number of an object.</p> <p>Unique within an account, case-sensitive.</p> <p>Can be used alternatively to <code>objectuid</code>.</p>
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated.</p> <p>Can be used alternatively to <code>objectno</code>.</p>
appid	string (128)	<p>An identifier to mark the application on the destination device.</p> <p>Note: Use package style, for example <code>com.vendor.application.part</code></p> <p>If not used, all binary messages on the device will be removed.</p> <p>This parameter is optional.</p>

Drivers

Synchronising driver lists

Manually

Using the WEBFLEET user interface, you can send the complete driver list to a vehicle.

1. Select your vehicle.
2. Go to **Contract/Details**.
3. Select **Configure**.
4. Select the **Basic settings** tab.
You can find the section **Synchronize driver list**.
5. Click **Send**.
The current driver list is transmitted.

Automatically

WEBFLEET will send the latest changes of the driver list to a currently connected LINK 7xx/5xx/4xx/3xx/Driver Terminal combination when the device:

- Sends a working time related message.
- Sends a text message.
- Sends a predefined general status message.
- Sends an order related predefined status message.
- Changes the status of the active order.
- Activates in WEBFLEET.
- Starts navigating.

Specifically for connected navigation devices, the driver list is updated when the user accesses the driver list and the device is connected to WEBFLEET.

showDriverReportExtern

Description

Lists all drivers matching the indicated parameters and filters.

Technical details

SOAP endpoint address / function name objectsAndPeopleReportingService#showDriverReport

Request limits	10 requests / minute
----------------	----------------------

Parameters

showDriverReportExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to showDriverReportExtern:

Parameter	Type	Description
filterstring	string	An arbitrary pattern that is located in the object data.
driverno	string	Identifying number of a driver. Unique within an account. Search for the specified driver number. Can be used alternatively to driveruid.
ungroupedonly	string	Allows to filter on drivers that are currently not assigned to a certain driver group. Only valid value is true. This parameter overrules the group name filter parameter. This parameter is optional.
driveruid	string	A unique, unchangeable identifier for the indicated driver, automatically generated. Can be used alternatively to driverno.

Result

Result for showDriverReportExtern:

Parameter	Type	Description
driverno	string (10)	Account-unique driver number, case-sensitive.
name1	string (50)	
name2	string (50)	
name3	string (50)	
addrno	string (10)	Identifying number of an address. Unique within an account.
state	string (2)	ISO 3166-1 alpha-2 code for the country (capital letters).
zip	string (10)	
city	string (250)	
street	string (250)	
telmobile	string (50)	
telprivate	string (50)	
email	string (50)	
description		
company	string (250)	

Parameter	Type	Description
objectno	string (10)	<p>Identifying number of an object.</p> <p>Unique within an account, case sensitive.</p> <p>Identifies the driver currently signed on to this object.</p>
signontime	dateTime	<p>The time when the driver signed on to this object.</p> <p>ISO 8601-formatted date and time in the UTC timezone, combined representation in the extended format.</p> <p>Example: 2007-12-24T16:00:00+02:00</p>
dt_cardid	string (16)	A driver card id as used with the digital tachograph.
dt_cardcountry	string (2)	ISO 3166-1 alpha-2 code for the country (capital letters).
rll_buttonid	string (16)	Remote LINK/ID key identifier
signonrole	nonNegativeInteger	<p>Valid values:</p> <ul style="list-style-type: none"> • 1 - Driver • 2 - Co-Driver • 3 - Worker
current_workstate	nonNegativeInteger	<p>Valid values:</p> <ul style="list-style-type: none"> • 0 - Unknown • 1 - Free time (PND only) • 2 - Pause (PND and digital tachograph) • 3 - Standby (digital tachograph only) • 4 - Working (PND only) • 5 - Driving (digital tachograph only) • 6 - Other work (digital tachograph only)
current_working-timestart	dateTime	<p>ISO 8601-formatted date and time in the UTC timezone, combined representation in the extended format.</p> <p>Example: 2007-12-24T16:00:00+02:00</p>
current_working-timeend	dateTime	<p>ISO 8601-formatted date and time in the UTC timezone, combined representation in the extended format.</p> <p>Example: 2007-12-24T16:00:00+02:00</p>
current_workingtime	duration	<p>ISO 8601-formatted duration.</p> <p>Example: PT362S represents a duration of 362 seconds, as does PT6M2S.</p> <p>Accumulated working time if current_workstate indicates a non-working state.</p>

Parameter	Type	Description
addr_latitude	int	<p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
addr_longitude	int	<p>Geographic longitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
manualassignment	int	<p>Indicates whether the driver is assigned to the current vehicle manually by using <code>attachDriverToVehicle</code> or automatically by the driver who has logged on using a navigation device or digital tachograph.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 0 - automatically • 1 - manually • <empty> - if no vehicle is assigned or the information is not available
pin	nonNegativeInteger (20) ([1-9]\d*)	The PIN that a driver uses to log in to the Driver Terminal.
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated.</p> <p>Can be used alternatively to <code>objectno</code>.</p>
driveruid	string	<p>A unique, unchangeable identifier for the indicated driver, automatically generated.</p> <p>Can be used alternatively to <code>driverno</code>.</p>
driver_keys	string	<p>JSON encoded string with an array of JSON objects composed by the driver keys, associated with the driver.</p> <p>The JSON objects have following format:</p> <pre>{ "driver_key_type": <number>, "driver_key_value": <string> }</pre> <p>Valid values:</p> <ul style="list-style-type: none"> • 1 - Remote LINK • 2 - Generic identifier <p><i>Usage example:</i> RFID used with PRO 2020 Driver Terminal.</p>

Parameter	Type	Description
driving_license	string	<p>JSON encoded string with a JSON object composed by the driving licence details of the driver.</p> <p>The JSON object has following format:</p> <pre>{ "number": <string>, "country": <string>, "state": <string>, "issue_date": <datetime>, "expiry_date": <datetime>, "types": <array> }</pre> <p>Field <code>types</code> is an array of JSON objects which have the following format:</p> <pre>{ "code": <string> "valid_from": <datetime>, "valid_to": <datetime> }</pre> <p>Valid values of licence type code: A, A1, B, B1, BE, C, C1, C1E, CE, D, D1, D1E, DE</p>

insertDriverExtern

Description

This action creates a driver.

Technical details

SOAP endpoint address / function name driverManagementService#insertDriver

Request limits	10 requests / minute
----------------	----------------------

Parameters

insertDriverExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to insertDriverExtern:

Parameter	Type	Description
driverno	string (10)	<p>Account-unique driver number, case-sensitive.</p> <p>This parameter is required.</p>
name	string (50)	This parameter is required.

Parameter	Type	Description
name2	string (50)	Additional driver name. This parameter is optional.
name3	string (50)	Additional driver name. This parameter is optional.
company	string (250)	
description	string (4000)	
addrno	string (10)	Identifying number of an address. Unique within an account. The following conditions apply: <ul style="list-style-type: none"> • If <code>addrno</code> is indicated and it shows a valid address number, the corresponding address will be assigned to the driver. • If <code>addrno</code> is indicated and the value is empty, the relation between an assigned address and the driver will be deleted. • If <code>addrno</code> is empty and at least one of the free text address components <code>country</code>, <code>zip</code>, <code>city</code> and <code>street</code> is indicated, the stored address relation for this driver will be removed and the value of the address component will be attached to the driver.
country	string (2)	ISO 3166-1 alpha-2 code for the country (capital letters).
zip	string (10)	
city	string (250)	
street	string (250)	
telmobile	string (50)	
telprivate	string (50)	
pin	nonNegativeInteger (20) ([1-9]\d*)	Identifying number used for driver identification. To be used for all devices except LINK (classic) and TomTom GO 715. This parameter is optional.
email	string (50)	
dt_cardid	string (16)	A driver card id as used with the digital tachograph. This parameter is optional.
dt_cardcountry	string (2)	ISO 3166-1 alpha-2 code for the country (capital letters). This parameter is optional.

Parameter	Type	Description
rll_buttonid	string (16)	<p>Remote LINK/ID key identifier.</p> <p>Usage details:</p> <ul style="list-style-type: none"> the ID key provided must be 'available', that is, not assigned to any other driver to remove the ID key assignment, provide an empty parameter to assign a new ID key, first remove the old assignment if the parameter is not part of the request, the current assignment is left unchanged <p>This parameter is optional.</p>
driver_key	string	<p>Driver key identifier composed by driver key type and driver key value.</p> <p>The value must follow the format: <code>driverkeytype,driverkeyvalue</code></p> <p>Usage details:</p> <ul style="list-style-type: none"> the driver key provided must not be assigned to any other driver to remove a driver key assignment, <code>driverkeytype</code> followed by an empty <code>driverkeyvalue</code> must be provided to change multiple driver keys you can specify the <code>driver_key</code> parameter multiple times <p>Valid values for <code>driverkeytype</code>:</p> <ul style="list-style-type: none"> 1 - Remote LINK 2 - Generic Identifier, which is used for example for RFID used with PRO 2020 Driver Terminal
license_number	string (20)	<p>Number of the driving licence.</p> <p>This parameter is required if any driving licence field is filled.</p>
license_country	string (2)	<p>Country code of the driving licence. ISO 3166-1 alpha-2 for the country (capital letters).</p> <p>This parameter is required if any driving license field is filled.</p>
license_state	string (30)	<p>Issuing state of the driving licence.</p> <p>This parameter is required if any driving licence field is filled.</p>
issue_date	date	<p>Issue date of the driving licence.</p> <p>This parameter is required if any driving licence field is filled.</p>
expiry_date	date	<p>Expiry date of the driving licence.</p> <p>This parameter is optional.</p>

Parameter	Type	Description
license_type	string	<p>Driving licence type composed by licence type code, valid from date and optional valid to date.</p> <p>The value must follow one of these formats:</p> <pre>licenseTypeCode,validFrom,validTo licenseTypeCode,validFrom</pre> <p>Valid values of licence type code: A, A1, B, B1, BE, C, C1, C1E, CE, D, D1, D1E, DE.</p> <p>This parameter is required if any driving licence field is filled.</p>

updateDriverExtern

Description

This action updates driver details.

Technical details

SOAP endpoint address / function name driverManagementService#updateDriver

Request limits	10 requests / minute
----------------	----------------------

Parameters

updateDriverExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to updateDriverExtern:

Parameter	Type	Description
driverno	string (10)	New driver number to be set for the driver identified by <code>dri- verno_old</code> or <code>driveruid</code> , account-unique, case-sensitive. This parameter is optional.
name	string (50)	
name2	string (50)	Additional driver name. This parameter is optional.
name3	string (50)	Additional driver name. This parameter is optional.
company	string (250)	
description	string (4000)	

Parameter	Type	Description
addrno	string (10)	<p>Identifying number of an address. Unique within an account.</p> <p>The following conditions apply:</p> <ul style="list-style-type: none"> • If <code>addrno</code> is indicated and it shows a valid address number, the corresponding address will be assigned to the driver. • If <code>addrno</code> is indicated and the value is empty, the relation between an assigned address and the driver will be deleted. • If <code>addrno</code> is empty and at least one of the free text address components <code>country</code>, <code>zip</code>, <code>city</code> and <code>street</code> is indicated, the stored address relation for this driver will be removed and the value of the address component will be attached to the driver.
country	string (2)	ISO 3166-1 alpha-2 code for the country (capital letters).
zip	string (10)	
city	string (250)	
street	string (250)	
telmobile	string (50)	
telprivate	string (50)	
pin	nonNegativeInteger (20) ([1-9]\d*)	<p>Identifying number used for driver identification.</p> <p>To be used for all devices except LINK (classic) and TomTom GO 715.</p>
email	string (50)	
dt_cardid	string (16)	<p>A driver card id as used with the digital tachograph.</p> <p>This parameter is optional.</p>
dt_cardcountry	string (2)	ISO 3166-1 alpha-2 code for the country (capital letters).
		<p>This parameter is optional.</p>
rll_buttonid	string (16)	<p>Remote LINK/ID key identifier</p> <p>Usage details:</p> <ul style="list-style-type: none"> • the ID key provided must be 'available', that is, not assigned to any other driver • to remove the ID key assignment, provide an empty parameter • to assign a new ID key, first remove the old assignment • if the parameter is not part of the request, the current assignment is left unchanged <p>This parameter is optional.</p>
driverno_old	string (10)	<p>Account-unique driver number, case-sensitive.</p> <p>Either <code>driverno_old</code> or <code>driveruid</code> is required.</p>

Parameter	Type	Description
driveruid	string	A unique, unchangeable identifier for the indicated driver, automatically generated. Either <code>driverno_old</code> or <code>driveruid</code> is required.
driver_key	string	Driver key identifier composed of driver key type and driver key value. The value must follow the format: <code>driverkeytype,driverkeyvalue</code> Usage details: <ul style="list-style-type: none"> • the driver key provided must not be assigned to any other driver • to remove a driver key assignment, <code>driverkeytype</code> followed by an empty <code>driverkeyvalue</code> must be provided • to change multiple driver keys you can specify the <code>driver_key</code> parameter multiple times Valid values for <code>driverkeytype</code> : <ul style="list-style-type: none"> • 1 - Remote LINK • 2 - Generic Identifier, which is used for example for RFID used with PRO 2020 Driver Terminal
license_number	string (20)	Number of the driving licence. This parameter is required if any driving licence field is filled.
license_country	string (2)	Country code of the driving licence. ISO 3166-1 alpha-2 for the country (capital letters). This parameter is required if any driving licence field is filled.
license_state	string (30)	Issuing state of the driving licence. This parameter is required if any driving licence field is filled.
issue_date	date	Issue date of the driving licence. This parameter is required if any driving licence field is filled.
expiry_date	date	Expiry date of the driving licence. This parameter is optional.
license_type	string	Driving license type composed by licence type code, valid from date and optional valid to date. The value must follow one of these formats: <code>licenseTypeCode,validFrom,validTo</code> <code>licenseTypeCode,validFrom</code> Valid values of licence type code: A, A1, B, B1, BE, C, C1, C1E, CE, D, D1, D1E, DE. This parameter is required if any driving licence field is filled.

Additional notes for driver license data

To delete existing driver license data use blank fields for all license related parameters.

deleteDriverExtern

Description

This action deletes the indicated driver.

Technical details

SOAP endpoint address / function name `driverManagementService#deleteDriver`

Request limits	10 requests / minute
----------------	----------------------

Parameters

deleteDriverExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `deleteDriverExtern`:

Parameter	Type	Description
<code>driverno</code>	string (10)	Account-unique driver number, case-sensitive. This parameter is required. Can be used alternatively to <code>driveruid</code> .
<code>driveruid</code>	string	A unique, unchangeable identifier for the indicated driver, automatically generated. Can be used alternatively to <code>driverno</code> .

showOptiDriveIndicator

Description

`showOptiDriveIndicator` shows the OptiDrive indicator per driver, the values of all its influencing variables and the factors each of them is calculated from for a defined period. The start and end of this period can be adjusted up to a maximum time frame of seven days within the last three months.

The OptiDrive indicator for the defined period delivered by `showOptiDriveIndicator` is calculated from pre-aggregated values per calendar day. The aggregated results produced by `showOptiDriveIndicator` are based on information for each driver across multiple vehicles.

Technical details

SOAP endpoint address / function name `tripAndTimeReportingService#showOptiDriveIndicator`

Request limits	10 requests / minute
----------------	----------------------

Parameters

showOptiDriveIndicator requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Make use of the `range_pattern` for floating weeks.

`rangefrom_string` and `rangeend_string` are treated as pure date values, there is no time indication needed. The specified day is considered in the currently valid time zone of the account. The date range must not be greater than 8 days ranging from the beginning of the start day to the ending of the current day. The date range must not be greater than 7 days when defined for an earlier period.

Parameters specific to showOptiDriveIndicator:

Parameter	Type	Description
driverno	string (10)	Identifying number of a driver. Unique within an account, case-sensitive. This parameter is optional.
drivergroupname	string	Name of the group of drivers the driver is assigned to, case-sensitive. This parameter is optional.
driveruid	string	A unique, unchangeable identifier for the indicated driver, automatically generated. This parameter is optional.

Result

Result for showOptiDriveIndicator:

Parameter	Type	Description
driverno	string	Identifying number of a driver. Unique within an account.
drivername	string	Display name of a driver.
totaldrivingtime	integer	The total driving time of the driver in the defined period in seconds.
optidrive_indicator	float	The overall OptiDrive indicator.
trend	float	Value ranges from -1 to 1. Indicates the development of the OptiDrive value of the past showing whether the driver's driving style was increasing, stable or decreasing. Increase of the OptiDrive value is indicated by positive numbers. Decrease of the OptiDrive value is indicated by negative numbers. Values around 0 indicate the OptiDrive indicator stays stable.

Example 1: A value of 0.1 indicates only a slight increase of the OptiDrive indicator.

Example 2: A value of -0.9 indicates a heavy decrease of the OptiDrive indicator.

Parameter	Type	Description
totaldistance	integer	Total distance driven in defined period in meters.
speeding_indicator	float	Value of influencing variable for speeding events. Value ranges from 0 to 1.
speeding_time	integer	Total time of speeding events in seconds.
speeding_avgexcess	float	The average speed limit excess of all speeding events within defined period, in km/h.
		<i>Example: During the first speeding event the speed limit was broken by 10 km/h. During the second speeding event the speed limit was broken by 20 km/h. The resulting speeding_avgexcess is 15 km/h.</i>
speeding_avglimit	float	The average of effective speed limits during all speeding events in km/h.
		<i>Example: If the speed limit during the first speeding event was 50 km/h and the speed limit during the second speeding event was 70 km/h, the resulting speeding_avglimit is 60 km/h.</i>
speeding_count	integer	Number of speeding events registered during the defined period.
drivingevents_indicator	float	Value of influencing variable for driving events. Value ranges from 0 to 1.
drivingevents_count	integer	Number of driving events registered during defined period.
drivingevents_avg_severity	float	The average severity of driving events in percent.
idling_indicator	float	Value of influencing variable for idling. Value ranges from 0 to 1.
idling_time	integer	Time spent idling during defined period, in seconds.
idling_wastedfuel	integer	Total amount of fuel wasted while idling within the defined period.
fuelusage_indicator	float	Value of influencing variable for fuel consumption. Value ranges from 0 to 1.
fuelusage_total	integer	Total amount of fuel used by driver within the defined period in millilitres.
fuelusage_reference	integer	The amount of fuel the driver should have used according to the fuel consumption reference value for the covered distance within the defined period.
driveruid	string	A unique, unchangeable identifier for the indicated driver, automatically generated. Can be used alternatively to driverno.

Parameter	Type	Description
coasting_indicator	float	Value of influencing variable for coasting. Value ranges from 0 to 1.
coasting_reference_time	nonNegativeInteger	Potential coasting time in seconds, i.e. the sum of coasting and braking time.
coasting_time	nonNegativeInteger	Actual coasting time in seconds.
coasting_distance	nonNegativeInteger	Actual coasting distance in meters.
constant_speed_indicator	float	Value of influencing variable for constant speed. Value ranges from 0 to 1.
constant_speed_reference_time	nonNegativeInteger	Potential driving time in seconds at which constant speed was evaluated.
constant_speed_time	nonNegativeInteger	Actual driving time with constant speed, in seconds.
constant_speed_reference_time_urban	nonNegativeInteger	Potential driving time with constant speed in urban areas, in seconds.
constant_speed_reference_time_extra_urban	nonNegativeInteger	Potential driving time with constant speed in extra urban areas, in seconds
constant_speed_reference_time_motorway	nonNegativeInteger	Potential driving time with constant speed on motorway, in seconds.
constant_speed_time_urban	nonNegativeInteger	Actual driving time with constant speed in urban areas, in seconds.
constant_speed_time_extra_urban	nonNegativeInteger	Actual driving time with constant speed in extra urban areas, in seconds.
constant_speed_time_motorway	nonNegativeInteger	Actual driving time with constant speed on motorways, in seconds.
green_speed_indicator	float	Value of influencing variable for green speed. Value ranges from 0 to 1.
green_speed_reference_time	nonNegativeInteger	The actual time of a trip the green speed reference value would apply, in seconds.
<i>Example: The time where the speed limit was greater than > 80 km/h.</i>		
green_speed_time	nonNegativeInteger	Driving time with speed lower than/equal to current green speed limit (never greater than <code>green_speed_reference_time</code>), in seconds.

Parameter	Type	Description
high_revving_indicator	float	Value of influencing variable for highrevving. Value ranges from 0 to 1.
high_revving_reference_time	nonNegativeInteger	Driving time in which RPM data was reported, in seconds.
high_revving_time	nonNegativeInteger	Actual time in which the high-revving was reported, in seconds.

showDriverGroups

Description

This action retrieves a list of all driver groups.

Technical details

SOAP endpoint address / function name driverManagementService#showDriverGroups

Request limits	10 requests / minute
----------------	----------------------

Parameters

showDriverGroups requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to showDriverGroups:

Parameter	Type	Description
drivergroupname	string	The given entry filters the result list on driver groups with matching names. This parameter is optional.

Result

Result for showDriverGroups:

Parameter	Type	Description
drivergroupname	string	
drivergroupuid	string	A unique, unchangable identifier for the indicated driver group, automatically generated.

showDriverGroupDrivers

Description

This action lists the assignment of drivers to driver groups. Each driver can be in no, one or more than one group.

Using one or both of the parameters `driverno` and `drivergroupname`, only according matches are returned.

Technical details

SOAP endpoint address / function name `driverManagementService#showDriverGroupDrivers`

Request limits 10 requests / minute

Parameters

showDriverGroupDrivers requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `showDriverGroupDrivers`:

Parameter	Type	Description
<code>driverno</code>	string	Identifying number of a driver. Unique within an account, case-sensitive. Can be used alternatively to <code>driveruid</code> .
<code>drivergroupname</code>	string	The given entry filters the result list on driver groups with matching names, case-sensitive. This parameter is optional.
<code>driveruid</code>	string	A unique, unchangeable identifier for the indicated driver, automatically generated. Can be used alternatively to <code>driverno</code> .

Result

Result for `showDriverGroupDrivers`:

Parameter	Type	Description
<code>driverno</code>	string	Identifying number of a driver. Unique within an account.
<code>drivername</code>	string	Display name of a driver.
<code>drivergroupname</code>	string	
<code>driveruid</code>	string	A unique, unchangeable identifier for the indicated driver, automatically generated. Can be used alternatively to <code>driverno</code> .

Parameter	Type	Description
drivergroupid	string	A unique, unchangeable identifier for the indicated driver group, automatically generated.

attachDriverToGroup

Description

This action assigns a driver to a specific group.

Technical details

SOAP endpoint address / function name driverManagementService#attachDriverToGroup

Request limits	10 requests / minute
----------------	----------------------

Parameters

attachDriverToGroup requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to attachDriverToGroup:

Parameter	Type	Description
drivergroupname	string	Name of the group the driver shall be assigned to, case-sensitive. This parameter is required.
driverno	string	Identifying number of a driver. Unique within an account, case-sensitive. This parameter is required. Can be used alternatively to <code>driveruid</code> .
driveruid	string	A unique, unchangeable identifier for the indicated driver, automatically generated. Can be used alternatively to <code>driverno</code> .

detachDriverFromGroup

Description

This action detaches a driver from a specific driver group.

Technical details

SOAP endpoint address / function name driverManagementService#detachDriverGroup

Request limits	10 requests / minute
----------------	----------------------

Parameters

detachDriverFromGroup requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to detachDriverFromGroup:

Parameter	Type	Description
drivergroupname	string	Name of the group the driver group from which the driver shall be detached, case-sensitive. This parameter is required.
driverno	string	Identifying number of a driver. Unique within an account, case-sensitive. This parameter is required. Can be used alternatively to <code>driveruid</code> .
driveruid	string	A unique, unchangeable identifier for the indicated driver, automatically generated. Can be used alternatively to <code>driverno</code> .

insertDriverGroup

Description

This action creates a driver group. The group name must not start with "sys\$".

Technical details

SOAP endpoint address / function name `driverManagementService#insertDriverGroup`

Request limits 10 requests / minute

Parameters

insertDriverGroup requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to insertDriverGroup:

Parameter	Type	Description
drivergroupname	string	Name of the driver group, case-sensitive. This parameter is required.

deleteDriverGroup

Description

This action deletes a driver group and the assignments of all drivers to that group. The drivers detached through this action are not being deleted.

Technical details

SOAP endpoint address / function name driverManagementService#deleteDriverGroup

Request limits	10 requests / minute
----------------	----------------------

Parameters

deleteDriverGroup requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to deleteDriverGroup:

Parameter	Type	Description
drivergroupname	string	Name of the driver group, case-sensitive. This parameter is required.

updateDriverGroup

Description

This action allows to update the name of a driver group while retaining the assignment of drivers to that group. The group name must not start with "**sys\$**".

Technical details

SOAP endpoint address / function name driverManagementService#updateDriverGroup

Request limits	10 requests / minute
----------------	----------------------

Parameters

updateDriverGroup requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to updateDriverGroup:

Parameter	Type	Description
drivergroupname	string	Name of the driver group, case-sensitive. This parameter is required.

Parameter	Type	Description
drivergroupname_old	string	Name of the driver group, case-sensitive. This parameter is required.

attachDriverToVehicle

Description

Using `attachDriverToVehicle` you can manually assign a driver to a specific vehicle.

If the driver was previously assigned to another vehicle, they will be automatically detached from that vehicle.

This action cannot be executed when the driver is not manually assigned to another vehicle – that means by not using `attachDriverToVehicle`. Additionally, this action cannot be executed when a different driver is not manually assigned to the respective vehicle. This can be the case if the driver for example logs on to a vehicle by using a Driver Terminal or a digital tachograph.

Note: Keep in mind that this action should only be used as a kind of exception (e.g. one-time driver assignment/detachment) and not for the regular and reoccurring driver assignment. Generally the driver assignment should only be done by using a Driver Terminal from Webfleet Solutions, PRO 2020, Remote LINK Working Time or a digital tachograph.

Technical details

SOAP endpoint address / function name `driverManagementService#attachDriverToVehicle`

Request limits	10 requests / minute
----------------	----------------------

Parameters

`attachDriverToVehicle` requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `attachDriverToVehicle`:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .
driverno	string	Identifying number of a driver. Unique within an account, case-sensitive. This parameter is required. Can be used alternatively to <code>driveruid</code> .
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .

Parameter	Type	Description
driveruid	string	A unique, unchangeable identifier for the indicated driver, automatically generated. Can be used alternatively to <code>driverno</code> .

detachDriverFromVehicle

Description

Using `detachDriverFromVehicle` you can remove the manual assignment of a driver from a vehicle.

This action cannot be executed if the driver was not manually assigned by using `attachDriverToVehicle`. This can be the case when the driver for example logged on to the vehicle using a Driver Terminal or the digital tachograph.

Note: Keep in mind that this action should only be used as a kind of exception (e.g. one-time driver assignment/detachment) and not for the regular and reoccurring driver assignment. Generally the driver assignment should only be done by using a Driver Terminal from Webfleet Solutions, PRO 2020, Remote LINK Working Time or a digital tachograph.

Technical details

SOAP endpoint address / function name `driverManagementService#detachDriverFromVehicle`

Request limits	10 requests / minute
----------------	----------------------

Parameters

detachDriverFromVehicle requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `detachDriverFromVehicle`:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .
driverno	string	Identifying number of a driver. Unique within an account, case-sensitive. This parameter is required. Can be used alternatively to <code>driveruid</code> .
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .

Parameter	Type	Description
driveruid	string	A unique, unchangeable identifier for the indicated driver, automatically generated. Can be used alternatively to <code>driverno</code> .

getDriverRdtRules

Description

`getDriverRdtRules` returns the rules for calculating remaining driving times, working times and infringements for a specific driver or all drivers of the account.

These rules are applied

- when [retrieving remaining driving times for the driver](#)
- when determining infringements reported by [showEventReportExtern](#)

The rules can be changed by the action `updateDriverRdtRules`.

`getDriverRdtRules` is available for accounts that have at least one vehicle for which one of the following additional services is booked:

- Remaining Driving Times
- WEBFLEET Tachograph Manager Plus
- WEBFLEET TachoShare Plus

Related actions

- [getRemainingDrivingTimesEU](#) – calculates remaining driving times
- [updateDriverRdtRules](#) – changes the rules for calculating driving and working times and infringements
- [showEventReportExtern](#) – returns event notifications, including infringement notifications

Technical details

SOAP endpoint address / function name `driverManagementService#getDriverRdtRules`

Request limits	10 requests / minute
----------------	----------------------

Parameters

`getDriverRdtRules` requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `getDriverRdtRules`:

Parameter	Type	Description
driverno	string (10)	Identifying number of a driver. Unique within an account, case-sensitive. Can be used alternatively to <code>driveruid</code> .

Parameter	Type	Description
driveruid	string (30)	A unique, unchangeable identifier for the indicated driver, automatically generated. Can be used alternatively to <code>driverno</code> .

Result

Result for `getDriverRdtRules`:

Parameter	Type	Description
driverno	string (10)	Identifying number of a driver. Unique within an account.
driveruid	string (30)	A unique, unchangeable identifier for the indicated driver, automatically generated.
country	string	<p>The country determines which regulation and which rules are available for configuration. Refer to updateDriverRdtRules for possible combinations of country, regulation and rules.</p> <p>Format: ISO 3166-1 alpha-2 or NONE</p> <p>Allowed values:</p> <ul style="list-style-type: none"> • DE • IT • DK • NL • AT • GB • IE • CH • FR • SI • PL • BE • ES • SE • NO • FI • PT • NONE

Parameter	Type	Description
regulation_type	string	<p>The regulation that should be applied when calculating (remaining) driving and working times and infringements.</p> <p>Allowed values:</p> <ul style="list-style-type: none"> EU_561 Regulation (EC) No 561/2006 – Regulation of rules on driving times, breaks and rest periods. Applicable to all EU countries. ARV1_2011 Chauffeurverordnung, ARV 1 – Verordnung über die Arbeits- und Ruhezeit der berufsmässigen Motorfahrzeugführer und -fahrerinnen. Applicable to Switzerland (CH) only. FPERSV Fahrpersonalverordnung – Verordnung zur Durchführung des Fahrpersonalgesetzes. Applicable to Germany (DE) only.
bus_rule	boolean	If true the 12-day rule is considered in the calculation, which is regulated by (EC) No 561/2006, Article 8(6a).
working_time_rules	boolean	If true country specific working time rules are considered in the calculation.
employment_type	string	<p>The type of employment.</p> <p>Only applicable if regulation_type ARV1_2011 is selected.</p> <p>Allowed values:</p> <ul style="list-style-type: none"> EMPLOYEE SELF_EMPLOYED <p>If EMPLOYEE is selected, the Swiss working time regulations are considered in the calculation. Otherwise, if SELF_EMPLOYED is selected, they are not considered.</p>
isDefault	boolean	<p>If true then these are default rules.</p> <p>As long as no specific rule has been saved for a driver, predefined default rules are automatically used. Only after setting the rules using updateDriverRdtRules the first time, the value isDefault is always false.</p>

updateDriverRdtRules

Description

updateDriverRdtRules changes the rules for calculating remaining driving times, working times and infringements for a specific driver of the account. The action is available for accounts that have at least one vehicle for which one of the following additional features is booked:

- Remaining Driving Times
- WEBFLEET Tachograph Manager Plus
- WEBFLEET TachoShare Plus

These rules are applied

- when [retrieving remaining driving times for the driver](#)
- when determining infringements reported by [showEventReportExtern](#)

The currently stored rules can be retrieved by the action `getDriverRdtRules`.

Related actions

- [getRemainingDrivingTimesEU](#) – calculates remaining driving times
- [getDriverRdtRules](#) – retrieves the rules for calculating driving and working times and infringements
- [showEventReportExtern](#) – returns event notifications, including infringement notifications

Technical details

SOAP endpoint address / function name `driverManagementService#updateDriverRdtRules`

Request limits	10 requests / minute
----------------	----------------------

Parameters

updateDriverRdtRules requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `updateDriverRdtRules`:

Parameter	Type	Description
driverno	string (10)	Identifying number of a driver. Unique within an account, case-sensitive. Can be used alternatively to <code>driveruid</code> .
driveruid	string (30)	A unique, unchangeable identifier for the indicated driver, automatically generated. Can be used alternatively to <code>driverno</code> .

Parameter	Type	Description
country	string	<p>The country determines which regulation and which rules are available for configuration. Refer to section Allowed parameter combinations for possible combinations of <code>country</code> and <code>regulation_type</code>.</p> <p>Format: ISO 3166-1 alpha-2 or NONE</p> <p>Allowed values:</p> <ul style="list-style-type: none"> • DE • IT • DK • NL • AT • GB • IE • CH • FR • SI • PL • BE • ES • SE • NO • FI • PT • NONE
		<p>This parameter is mandatory.</p>
regulation_type	string	<p>The regulation that should be applied when calculating (remaining) driving and working times and infringements.</p> <p>Allowed values:</p> <ul style="list-style-type: none"> • EU_561 Regulation (EC) No 561/2006 – Regulation of rules on driving times, breaks and rest periods. Applicable to all EU countries. • ARV1_2011 Chaufeiverordnung, ARV 1 – Verordnung über die Arbeits- und Ruhezeit der berufsmässigen Motorfahrzeugführer und -fahrerinnen. Applicable to Switzerland (CH) only. • FPERSV Fahrpersonalverordnung – Verordnung zur Durchführung des Fahrpersonalgesetzes. Applicable to Germany (DE) only.
		<p>This parameter is mandatory.</p>
bus_rule	boolean	If <code>true</code> the 12-day rule is considered in the calculation, which is regulated by (EC) No 561/2006, Article 8(6a).

Parameter	Type	Description
working_time_rules	boolean	If true country specific working time rules are considered in the calculation.
employment_type	string	<p>The type of employment. Only applicable if regulation_type ARV1_2011 is selected. Allowed values:</p> <ul style="list-style-type: none"> • EMPLOYEE • SELF_EMPLOYED <p>If EMPLOYEE is selected, the Swiss working time regulations are considered in the calculation. Otherwise, if SELF_EMPLOYED is selected, they are not considered.</p>

Allowed parameter combinations

Driving and working times rules are defined by the country, the regulation and rules. In each country only a certain regulation and a certain set of rules can be applied. The corresponding parameters `country`, `regulation_type`, `bus_rules`, `working_time_rules` and `employment_type` depend on each other and only specific combinations are allowed as shown in the table below.

Note: Country `NONE` is a special case that, if stored in combination with `EU_561`, allows to reset the rules of a driver to the default. This default rule configuration is the same that is automatically applied to those drivers, for which no own configuration has yet been saved.

Country	Regulation	Type
DE	EU_561	<ul style="list-style-type: none"> • bus_rule • working_time_rules
DE	FPersV	<ul style="list-style-type: none"> • bus_rule
IT	EU_561	<ul style="list-style-type: none"> • bus_rule • working_time_rules
DK	EU_561	<ul style="list-style-type: none"> • bus_rule
NL	EU_561	<ul style="list-style-type: none"> • bus_rule • working_time_rules
AT	EU_561	<ul style="list-style-type: none"> • bus_rule • working_time_rules
GB	EU_561	<ul style="list-style-type: none"> • bus_rule • working_time_rules
IE	EU_561	<ul style="list-style-type: none"> • bus_rule • working_time_rules

Country	Regulation	Type
CH	ARV1_2011	<ul style="list-style-type: none"> • bus_rule • employment_type
FR	EU_561	<ul style="list-style-type: none"> • bus_rule • working_time_rules
SI	EU_561	<ul style="list-style-type: none"> • bus_rule
PL	EU_561	<ul style="list-style-type: none"> • bus_rule
BE	EU_561	<ul style="list-style-type: none"> • bus_rule
ES	EU_561	<ul style="list-style-type: none"> • bus_rule
SE	EU_561	<ul style="list-style-type: none"> • bus_rule
NO	EU_561	<ul style="list-style-type: none"> • bus_rule
FI	EU_561	<ul style="list-style-type: none"> • bus_rule
PT	EU_561	<ul style="list-style-type: none"> • bus_rule
NONE	EU_561	

Addresses

showAddressReportExtern

Description

This action returns a list of addresses matching the parameters and filters.

Technical details

SOAP endpoint address / function name addressService#showAddressReport

Request limits	6 requests / minute
----------------	---------------------

Parameters

showAddressReportExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to showAddressReportExtern:

Parameter	Type	Description
filterstring	string	An arbitrary pattern that is located in the object data.
addressgroupname	string	A name of an address group.
ungroupedonly	string	Allows to filter on addresses that are currently not assigned to a certain address group. Only valid value is <code>true</code> . This parameter overrules the group name filter parameter. This parameter is optional.
addrnr	string (10)	Identifying number of an address. Unique within an account.
addruid	string	A unique, unchangeable identifier for the indicated address, automatically generated.

Result

Result for showAddressReportExtern:

Parameter	Type	Description
addrnr	string (10)	Identifying number of an address. Unique within an account.
addrname1	string	

Parameter	Type	Description
addrname2	string	
addrname3	string	
addrstate	string (2)	ISO 3166-1 alpha-2 code for the country (capital letters).
addrzip	string	
addrcity	string	
addrstreet	string	
addrinfo	string	
addrregion	string	
contact	string	
teloffice	string	
telmobile	string	
telprivate	string	
fax	string	
mailaddr	string	
latitude	string	Geographic latitude in the form GGG° MM' SS.S" N/S in the WGS84 coordinate system.
longitude	string	Geographic longitude in the form GGG° MM' SS.S" E/W in the WGS84 coordinate system.
radius	int	Describes the perimeter around the address's location within that object locations are associated with this address.
visible	boolean	Controls visibility of this address on the map. If set to 1, the address will be shown on the map.

Parameter	Type	Description
color	string	<p>Valid values:</p> <ul style="list-style-type: none"> • brightblue • dullorange • brightorange • brightpalegreen • grassgreen • brightpurple • darkred • dullazure • deeppurple • brightazure • orangehighlight • brightgreen • brightorangehighlight • khaki • paleblue • turquoise
positiony	int	<p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
positionx	int	<p>Geographic longitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
addruid	string	A unique, unchangeable identifier for the indicated address, automatically generated.
mapcode	string (20)	<p>A mapcode represents a location.</p> <p>Learn more about mapcodes.</p>

showAddressGroupReportExtern

Description

Returns a list of address groups within the account matching the filter parameter.

Technical details

SOAP endpoint address / function name addressService#showAddressGroupReport

Request limits	900 requests / hour
----------------	---------------------

Parameters

showAddressGroupReportExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to showAddressGroupReportExtern:

Parameter	Type	Description
filterstring	string	An arbitrary pattern that is located in the address group name.

Result

Result for showAddressGroupReportExtern:

Parameter	Type	Description
addressgroupname	string	The name of the address group as it appears in WEBFLEET.
addressgroupuid	string	A unique, unchangeable identifier for the indicated address group, automatically generated.

showAddressGroupAddressReportExtern

Description

Shows a list with all associations between addresses and address groups. Each address can be in more than one address group, but must not necessarily belong to a group. The relationship between addresses and address groups is of m:n cardinality.

Technical details

SOAP endpoint address / function name addressService#showAddressGroupAddressReport

Request limits	900 requests / hour
----------------	---------------------

Parameters

showAddressGroupAddressReportExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Table 4-151: Parameters specific to showAddressGroupAddressReportExtern:

Parameter	Type	Description
filterstring	string	An arbitrary pattern that is located in the address group name.

Result

Result for showAddressGroupAddressReportExtern:

Parameter	Type	Description
addressgroupname	string	The name of the address group as it appears in WEBFLEET.
addrnr	string (10)	Identifying number of an address. Unique within an account.
addruid	string	A unique, unchangable identifier for the indicated address, automatically generated.
addressgroupuid	string	A unique, unchangable identifier for the indicated address group, automatically generated.

insertAddressExtern

Description

Inserts an address record.

Technical details

SOAP endpoint address / function name addressService#insertAddress

Request limits 900 requests / hour

Parameters

insertAddressExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to insertAddressExtern:

Parameter	Type	Description
addrnr	string (10)	Identifying number of an address, case-sensitive. Unique within an account. This parameter is mandatory.
addrname1	string (50)	This parameter is mandatory.
addrname2	string (50)	
addrname3	string (50)	
addrstreet	string (50)	
addrzip	string (10)	
addrcity	string (50)	

Parameter	Type	Description
addrcountry	string (2)	ISO 3166-1 alpha-2 code for the country (capital letters).
addrregion	string	Name (or abbreviation) of the county, district or federal state this locality belongs to.
contact	string (50)	
teloffice	string (20)	
telmobile	string (20)	
telprivate	string (20)	
fax	string (20)	
mailaddr	string (254)	
radius	int	<p>Describes the perimeter around the address's location within that object locations are associated with this address.</p> <p>The minimum value is 50 meters. All values below will result in a default radius of 250 meters.</p>
addrinfo	string (1000)	
positiony	int	<p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: $(\text{degrees} + \text{minutes}/60 + \text{seconds}/3600) * 10^6$ and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
positionx	int	<p>Geographic longitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: $(\text{degrees} + \text{minutes}/60 + \text{seconds}/3600) * 10^6$ and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
visible	boolean	Controls visibility of this address on the map. If set to 1, the address will be shown on the map.

Parameter	Type	Description
color	string	<p>The colour associated with the address. Case-sensitive.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • brightblue • dullorange • brightorange • brightpalegreen • grassgreen • brightpurple • darkred • dullazure • deeppurple • brightazure • orangehighlight • brightgreen • brightorangehighlight • khaki • paleblue • turquoise
addrgrpname	string (30)	<p>Name of an address group, case-sensitive. Unique within an account.</p> <p>The address will be automatically associated with this group.</p> <p>This parameter is optional.</p>
addrgrpid	string	A unique, unchangeable identifier for the indicated address group, automatically generated.
mapcode	string (20)	<p>A mapcode represents a location.</p> <p>Either <code>mapcode</code> or <code>latitude/longitude</code> coordinates can be used, but not both.</p> <p>Learn more about mapcodes.</p>

updateAddressExtern

Description

Updates an existing address record.

Note: The following parameters are deleted when using this action if they are not specified:

`addrname2, addrname3, addrstreet, addrzip, addrcity, addrcountry, addrregion, contact, teloffice, telmobile, telprivate, fax, mailaddr, addrinfo, color`

Technical details

SOAP endpoint address / function name `addressService#updateAddress`

Request limits

900 requests / hour

Parameters

updateAddressExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to updateAddressExtern:

Parameter	Type	Description
addrnr	string (10)	Identifying number of an address. Unique within an account. Note: The parameter <code>addrnr</code> or <code>addruid</code> is required.
addrname1	string (50)	This parameter is required.
addrname2	string (50)	
addrname3	string (50)	
addrstreet	string (50)	
addrzip	string (10)	
addrcty	string (50)	
addrcountry	string (2)	ISO 3166-1 alpha-2 code for the country (capital letters).
addrregion	string	Name (or abbreviation) of the county, district or federal state this locality belongs to.
contact	string (50)	
teloffice	string (20)	
telmobile	string (20)	
telprivate	string (20)	
fax	string (20)	
mailaddr	string (254)	
radius	int	Describes the perimeter around the address's location within that object locations are associated with this address. The minimum value is 50 meters. All values below will result in a default radius of 250 meters.
addrinfo	string (1000)	

Parameter	Type	Description
positiony	int	<p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
positionx	int	<p>Geographic longitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
visible	boolean	Controls visibility of this address on the map. If set to 1, the address will be shown on the map.
color	string	<p>The colour associated with the address.</p> <p>Case-sensitive.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • brightblue • dullorange • brightorange • brightpalegreen • grassgreen • brightpurple • darkred • dullazure • deeppurple • brightazure • orangehighlight • brightgreen • brightorangehighlight • khaki • paleblue • turquoise
addruid	string	A unique, unchangable identifier for the indicated address, automatically generated.
Note: The parameter addrnr or addruid is required.		
mapcode	string (20)	<p>A mapcode represents a location.</p> <p>Either mapcode or latitude/longitude coordinates can be used but not both.</p> <p>Learn more about mapcodes.</p>

deleteAddressExtern

Description

Deletes the specified address.

Technical details

SOAP endpoint address / function name addressService#deleteAddress

Request limits 900 requests / hour

Parameters

deleteAddressExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to deleteAddressExtern:

Parameter	Type	Description
addrnr	string (10)	Identifying number of an address. Unique within an account.
addruid	string	A unique, unchangeable identifier for the indicated address, automatically generated.

attachAddressToGroupExtern

Description

Assigns an address to a specific address group.

Technical details

SOAP endpoint address / function name addressService#attachAddressToGroup

Request limits 900 requests / hour

Parameters

attachAddressToGroupExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to attachAddressToGroupExtern:

Parameter	Type	Description
addrnr	string (10)	Identifying number of an address. Unique within an account.

Parameter	Type	Description
addrgrpname	string (30)	Name of an address group, case-sensitive. Unique within an account.
addruid	string	A unique, unchangable identifier for the indicated address, automatically generated.
addrgrpuid	string	A unique, unchangable identifier for the indicated address group, automatically generated.

detachAddressFromGroupExtern

Description

Deletes the assignment of an address to an address group.

Technical details

SOAP endpoint address / function name addressService#detachAddressFromGroup

Request limits	900 requests / hour
----------------	---------------------

Parameters

detachAddressFromGroupExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to detachAddressFromGroupExtern:

Parameter	Type	Description
addrnr	string (10)	Identifying number of an address, case-sensitive. Unique within an account.
addrgrpname	string (30)	Name of an address group, case-sensitive. Unique within an account.
addruid	string	A unique, unchangable identifier for the indicated address, automatically generated.
addrgrpuid	string	A unique, unchangable identifier for the indicated address group, automatically generated.

insertAddressGroupExtern

Description

This action creates an address group in an account.

Technical details

SOAP endpoint address / function name addressService#insertAddressGroup

Request limits	900 requests / hour
----------------	---------------------

Parameters

insertAddressGroupExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to insertAddressGroupExtern:

Parameter	Type	Description
addrgrpname	string (30)	Name of an address group. Unique within an account.

deleteAddressGroupExtern

Description

This action deletes an address group and the assignments of all addresses assigned to that group. With this action you can also delete all addresses that are assigned to the address group.

Technical details

SOAP endpoint address / function name addressService#deleteAddressGroup

Request limits	900 requests / hour
----------------	---------------------

Parameters

deleteAddressGroupExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to deleteAddressGroupExtern:

Parameter	Type	Description
addrgrpname	string (30)	Name of an address group, case-sensitive. Unique within an account.
deleteaddresses	boolean	If set to 1 all addresses attached to the indicated address group will be deleted in addition to the address group itself and the address assignments.
IMPORTANT: Please use carefully. All addresses assigned will be deleted without further confirmation.		
This parameter is optional.		

Parameter	Type	Description
addrgrpuid	string	A unique, unchangable identifier for the indicated address group, automatically generated.

Events

showEventReportExtern

Description

Provides a list of event notifications.

Technical details

SOAP endpoint address / function name eventReportingService#showEventReport

Request limits	1 request / minute
----------------	--------------------

Parameters

showEventReportExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

showEventReportExtern requires the following other parameters:

- [Date range filter parameters](#)

Parameters specific to **showEventReportExtern**:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. This parameter is optional.
eventlevel_cur	nonNegativeInteger	Event level. Valid values: <ul style="list-style-type: none">• 0 - Message• 1 - Notice/Information• 2 - Warning• 3 - Alarm 1• 4 - Alarm 2• 5 - Alarm 3 This parameter is optional.
resolved	boolean	Flags a resolved event. Valid values: <ul style="list-style-type: none">• 0 - Unresolved• 1 - Resolved This parameter is optional.

Parameter	Type	Description
acknowledged	boolean	<p>Flags an acknowledged event.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 0 - Unacknowledged • 1 - Acknowledged <p>This parameter is optional.</p>
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated.</p> <p>Can be used alternatively to <code>objectno</code>.</p>

Result

Result for `showEventReportExtern`:

Parameter	Type	Description
eventid	string	
msgtime	string	
eventtime	string	
objectno	string (10)	Identifying number of an object. Unique within an account, case sensitive.
msgtext	string	
postext	string	
latitude	string	Geographic latitude in the form GGG° MM' SS.S" N/S in the WGS84 coordinate system.
longitude	string	Geographic longitude in the form GGG° MM' SS.S" E/W in the WGS84 coordinate system.
restime	string	
acktime	string	
eventlevel	string	<p>The original event level this event had when it was created.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • I - Information • W - Warning • A - Alarm
alarmlevel	string	

Parameter	Type	Description
eventlevel_cur	string	<p>The current event level for this event.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • I - Information • W - Warning • A - Alarm
resuser	string	<p>Identifies the user who resolved this event.</p> <p>Can be empty if user does not have the relevant rights to access user information.</p>
ackuser	string	<p>Identifies the user who acknowledged this event.</p> <p>Can be empty if user does not have the relevant rights to access user information.</p>
latitude_mdeg	int	<p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
longitude_mdeg	int	<p>Geographic longitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated.</p> <p>Can be used alternatively to <code>objectno</code>.</p>
pos_time	string	<p>The time that is related to the last known position of the vehicle when the event occurred.</p> <p>Can be empty if user does not have the relevant rights to see positions of the respective object.</p>

acknowledgeEventExtern

Description

Flags an event at an alarmed level as acknowledged. The event level will be set to the next lower level.

Technical details

SOAP endpoint address / function name `eventReportingService#acknowledgeEvent`

Request limits	300 requests / 30 minutes
----------------	---------------------------

Parameters

acknowledgeEventExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to acknowledgeEventExtern:

Parameter	Type	Description
eventid	String	

resolveEventExtern

Description

Flags an event below an alarmed level as resolved.

Technical details

SOAP endpoint address / function name eventReportingService#resolveEvent

Request limits	300 requests / 30 minutes
----------------	---------------------------

Parameters

resolveEventExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to resolveEventExtern:

Parameter	Type	Description
eventid	string	

getEventForwardConfigs

Description

This action returns event forwarding configurations.

Technical details

SOAP endpoint address / function name eventReportingService#getEventForwardConfigs

Request limits	10 requests / minute
----------------	----------------------

Parameters

getEventForwardConfigs requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to getEventForwardConfigs:

Parameter	Type	Description
objectgroupname	string (50)	<p>Name of the group of objects. This parameter is optional.</p>
objectno	string (10)	<p>Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code>.</p> <p>Note: Make sure that the object you indicate using <code>objectno</code> belongs to the object group you have indicated using <code>objectgroupname</code>.</p>
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code>.</p> <p>Note: Make sure that the object you indicate using <code>objectuid</code> belongs to the object group you have indicated using <code>objectgroupname</code>.</p>
eventlevel	int	<p>The level of an event. Valid values:</p> <ul style="list-style-type: none"> • 1 - Notice/Information • 2 - Warning • 3 - Alarm 1 • 4 - Alarm 2 • 5 - Alarm 3 <p>This parameter is optional.</p>

Result

Results for getEventForwardConfigs:

Parameter	Type	Description
eventforwardconfigu- id	string (30)	A unique, unchangeable identifier for the indicated event forwarding configuration, automatically generated.

Parameter	Type	Description
eventlevel	int	<p>The level of an event.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 1 - Notice/Information • 2 - Warning • 3 - Alarm 1 • 4 - Alarm 2 • 5 - Alarm 3
objectgroupname	string (50)	Name of the group of objects.
objectno	string (10)	<p>Identifying number of an object.</p> <p>Unique within an account, case-sensitive.</p>
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated.
recipientcount	int	The number of recipients.

getEventForwardConfigRecipients

Description

`getEventForwardConfigRecipients` returns the primary and all additional recipients of an event forwarding configuration.

Technical details

SOAP endpoint address / function name `eventReportingService#getEventForwardConfigRecipients`

Request limits	10 requests / minute
----------------	----------------------

Parameters

getEventForwardConfigRecipients requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `getEventForwardConfigRecipients`:

Parameter	Type	Description
eventforwardconfig- id	string (30)	<p>A unique unchangeable identifier for the indicated event forwarding configuration, automatically generated.</p> <p>This parameter is mandatory.</p>

Result

Results for `getEventForwardConfigRecipients`:

Parameter	Type	Description
eventforwardconfig- id	string (30)	A unique, unchangeable identifier for the indicated event for- warding configuration, automatically generated.
recipientname	string (200)	Name of recipient.
recipientaddress	string (200)	Email address of recipient.

insertEventForwardConfig

Description

Using `insertEventForwardConfig` you can create a new event forwarding configuration.

Technical details

SOAP endpoint address / function name `eventReportingService#insertEventForwardConfig`

Request limits	10 requests / minute
----------------	----------------------

Parameters

insertEventForwardConfig requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `insertEventForwardConfig`:

Parameter	Type	Description
eventlevel	int	<p>The level of an event. Valid values:</p> <ul style="list-style-type: none"> • 1 - Notice/Information • 2 - Warning • 3 - Alarm 1 • 4 - Alarm 2 • 5 - Alarm 3 <p>This parameter is mandatory.</p>
objectgroupname	string (50)	<p>Name of the group of objects. This parameter is optional.</p>

Parameter	Type	Description
objectno	string (10)	<p>Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code>.</p> <p>Note: Make sure that the object you indicate using <code>objectno</code> belongs to the object group you have indicated using <code>objectgroupname</code>.</p>
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code>.</p> <p>Note: Make sure that the object you indicate using <code>objectuid</code> belongs to the object group you have indicated using <code>objectgroupname</code>.</p>
recipient	string (400)	<p>Name and email address of recipient. You can separate first name from last name by using a comma. The email address must be a valid email address according to RFC5322 and RFC2606. Separate name from email by using a semicolon. You can indicate multiple recipients by repeating the <code>recipient</code> parameter. This parameter is required.</p>

Result

Results for `insertEventForwardConfig`:

Parameter	Type	Description
eventforwardconfig- id	string (30)	A unique, unchangeable identifier for the indicated event forwarding configuration, automatically generated.

updateEventForwardConfig

Description

Using `updateEventForwardConfig` you can update an existing event forwarding configuration.

Technical details

SOAP endpoint address / function name `eventReportingService#updateEventForwardConfig`

Request limits	10 requests / minute
----------------	----------------------

Parameters

updateEventForwardConfig requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to updateEventForwardConfig:

Parameter	Type	Description
eventforwardconfig- id	string (30)	A unique, unchangeable identifier for the indicated event for- warding configuration, automatically generated. This parameter is mandatory.
eventlevel	int	The level of an event. Valid values: <ul style="list-style-type: none">• 1 - Notice/Information• 2 - Warning• 3 - Alarm 1• 4 - Alarm 2• 5 - Alarm 3 This parameter is required.
objectgroupname	string (50)	Name of the group of objects. This parameter is optional.
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> . Note: Make sure that the object you indicate using <code>object- no</code> belongs to the object group you have indicated using <code>ob- jectgroupname</code> .
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, auto- matically generated. Can be used alternatively to <code>objectno</code> . Note: Make sure that the object you indicate using <code>objec- tuid</code> belongs to the object group you have indicated using <code>ob- jectgroupname</code> .

Parameter	Type	Description
recipient	string (400)	<p>Name and email address of recipient.</p> <p>You can separate first name from family name by using a comma.</p> <p>The email address must be a valid email address according to RFC5322 and RFC2606.</p> <p>Separate name from email by using a semicolon.</p> <p>You can indicate multiple recipients by repeating the <code>recipient</code> parameter.</p> <p>This parameter is required.</p>

deleteEventForwardConfig

Description

Using `deleteEventForwardConfig` you can delete an existing event forwarding configuration.

Technical details

SOAP endpoint address / function name `eventReportingService#deleteEventForwardConfig`

Request limits	10 requests / minute
----------------	----------------------

Parameters

`deleteEventForwardConfig` requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `deleteEventForwardConfig`:

Parameter	Type	Description
eventforwardconfigu- id	string (30)	<p>A unique, unchangeable identifier for the indicated event for-warding configuration, automatically generated.</p> <p>This parameter is mandatory.</p>

Trips and working times

showTripReportExtern

Description

Provides a list of trips of an object. Trips of deleted objects cannot be shown.

In order to prevent your system from being flooded with oversized responses, the result is limited to 10000 entries, if the continuous replication is used. The limit can be adjusted per account on request.

Technical details

SOAP endpoint address / function name tripAndTimeReportingService#showTripReport

Request limits	1 request / minute
----------------	--------------------

Usage patterns

showTripReportExtern supports two alternative usages patterns for different application integration scenarios:

- **Continuous replication of trip records** into a local application; the replication is done by referring to a `tripid` retrieved from a previous call to showTripReportExtern.
- **On-demand download of trip records** created within a variable time period using a date range filter ([Date range filter parameters](#)). The date range filter applies to the end time of a trip.

For both usage patterns, either all trip records or a subset of trip records for a specific object (selected by providing filter conditions) can be downloaded.

- **Continuous replication**

If your application requires access to all or specific trip records, a periodic call of showTripReportExtern can be used to retrieve all new trip records received since the last call. The recommended frequency of calls depends on the distribution of trip reports over any specific period of time as well as business requirements, but should not be more frequent than one call every 15 minutes.

Each trip record is identified by a `tripid` that is strictly (monotonically) increasing. While processing the downloaded results of a call to showTripReportExtern, store the highest `tripid` and provide this as a parameter to the next call.

In order to prevent your system from being flooded with oversized responses, the result is limited to 10000 entries, if you are using continuous replication. The limit can be adjusted per account on request.

- **Date range filter behaviour**

The date range filter applies to the trip end date/time, not the date/time when the trip record was created. Due to this behaviour, there is no guarantee that all trips can be consistently downloaded by e.g. daily calls to showTripReportExtern (for example, trip records sent late due to unavailable GPRS coverage might be missed). Continuous replication is therefore the recommended method of retrieving trip records in near real-time.

Parameter restrictions

Before processing a request, all parameters are checked for invalid combinations and an error message is returned if an unacceptable parameter combination is detected.

- If `tripid` is provided, it must be valid, that is, must have been returned by previous calls to `showTripReportExtern`. In order to retrieve an initial value for `tripid`, use a one-time download covering a small time period.
- If no `tripid` is provided, a date range filter ([Date range filter parameters](#)) compliant to more restrictions (see below) must be present.
- The time period covered by date range filter ([Date range filter parameters](#)) may not be greater than 1 year.
- If the time period covered by date range filter ([Date range filter parameters](#)) is greater than 1 month (and less than or equal to 1 year), an `objectno` must be provided to constrain the result set.

Parameters

`showTripReportExtern` requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

`showTripReportExtern` requires the following other parameters:

- [Date range filter parameters](#)

Parameters specific to `showTripReportExtern`:

Parameter	Type	Description
<code>objectno</code>	string (10)	Identifying number of an object. Unique within an account, case-sensitive. This parameter is optional.
<code>tripid</code>	nonNegativeInteger	This parameter is optional.
<code>driverno</code>	string	Identifying number of a driver. Unique within an account, case-sensitive. Can be used alternatively to <code>driveruid</code> .
<code>drivergroupname</code>	string	Name of the group of drivers the driver is assigned to, case-sensitive. This parameter is optional.
<code>objectgroupname</code>	string	Name of the group of objects the object is assigned to, case-sensitive. This parameter is optional.
<code>objectuid</code>	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .
<code>externalid</code>	string	For future use. This parameter is optional.
<code>driveruid</code>	string	A unique, unchangeable identifier for the indicated driver, automatically generated. Can be used alternatively to <code>driverno</code> .

Parameters specific to `showTripReportExtern`

Result

Result for `showTripReportExtern`:

Parameter	Type	Description
tripid	string	
tripmode	nonNegativeInteger	Valid values: <ul style="list-style-type: none">• 0 - Unknown trip type• 1 - Private trip• 2 - Business trip• 3 - Commute trip• 4 - Correction trip (user changed the odometer value manually)
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
objectname	string	Display name of an object.
start_time	string	The time recorded when this event started.
start_odometer	int	The odometer reading when this event started.
start_postext	string	A detailed textual description of the location where this event started.
end_time	string	The time recorded when this event ended.
end_odometer	int	The odometer reading when this event ended.
end_postext	string	A detailed textual description of the location where this event ended.
duration	int	The difference between start_time and end_time. Unit of measurement is "seconds".
idle_time	int	The idle time during this trip. Unit of measurement is "seconds".
distance	int	The difference between start_odometer and end_odometer. Unit of measurement is "meters".
avg_speed	int	The average speed during this trip.
max_speed	int	The maximum speed during this trip.
fuel_usage	float	Fuel consumption in litres, max. three decimals allowed.

Result for showTripReportExtern

Parameter	Type	Description
start_longitude	int	<p>Geographic longitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
start_latitude	int	<p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
start_formatted_longitude	string	<p>Geographic longitude in the form GGG° MM' SS.S" E/W in the WGS84 coordinate system.</p>
start_formatted_latitude	string	<p>Geographic latitude in the form GGG° MM' SS.S" N/S in the WGS84 coordinate system.</p>
end_longitude	int	<p>Geographic longitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
end_latitude	int	<p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
end_formatted_longitude	string	<p>Geographic longitude in the form GGG° MM' SS.S" E/W in the WGS84 coordinate system.</p>
end_formatted_latitude	string	<p>Geographic latitude in the form GGG° MM' SS.S" N/S in the WGS84 coordinate system.</p>
driverno	string	<p>Identifying number of a driver.</p> <p>Unique within an account.</p>
drivername	string	Display name of a driver.

Result for showTripReportExtern

Parameter	Type	Description
start_addrno	string	Identifying number of an address. Unique within an account.
end_addrno	string	Identifying number of an address. Unique within an account.
fueltype	int	Valid values: <ul style="list-style-type: none">• 0 - unknown• 1 - diesel• 2 - gasoline• 3 - lpg• 4 - hybrid petrol• 5 - hybrid diesel• 6 - electric
co2	int	Carbon dioxide emissions in grams.
ep_distance	int	Distance measured by ecoPLUS in meters.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to objectno.
externalid	string	For future use.
driveruid	string	A unique, unchangeable identifier for the indicated driver, automatically generated. Can be used alternatively to driverno.
optidrive_indicator	float	The overall OptiDrive indicator.
speeding_indicator	float	Value of influencing variable for speeding events. Value ranges from 0 to 1.
drivingevents_indicator	float	Value of influencing variable for driving events. Value ranges from 0 to 1.
idling_indicator	float	Value of influencing variable for idling. Value ranges from 0 and 1.
fuelusage_indicator	float	Value of influencing variable for fuel consumption. Value ranges from 0 and 1.
coasting_indicator	float	Value of influencing variable for coasting. Value ranges from 0 to 1.
constant_speed_indicator	float	Value of influencing variable for constant speed. Value ranges from 0 to 1.
green_speed_indicator	float	Value of influencing variable for green speed. Value ranges from 0 to 1.

Result for showTripReportExtern

Parameter	Type	Description
high_revving_indicator	float	Value of influencing variable for high-revving. Value ranges from 0 to 1.
energy_usage	float	Energy consumption in kWh. Max. three decimals allowed.

Result for showTripReportExtern

showTripSummaryReportExtern

Description

This action provides daily accumulated trip information.

Technical details

SOAP endpoint address / function name tripAndTimeReportingService#showTripSummaryReport

Request limits	10 requests / minute
----------------	----------------------

Parameters

showTripSummaryReportExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

showTripSummaryReportExtern requires the following other parameters:

- [Date range filter parameters](#) - Maximum range is one year (but only if `objectno` is set.)

Parameters specific to **showTripSummaryReportExtern**:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. This parameter is mandatory if <code>objectuid</code> is not defined.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. This parameter is mandatory if <code>objectno</code> is not defined.

Result

Result for **showTripSummaryReportExtern**:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
objectname	string	Display name of an object.

Parameter	Type	Description
start_time	string	The time recorded when this event started.
start_odometer	int	The odometer reading when this event started.
end_time	string	The time recorded when this event ended.
end_odometer	int	The odometer reading when this event ended.
end_postext	string	A detailed textual description of the location where this event ended.
distance	int	The difference between start_odometer and end_odometer. Unit of measurement is "meters".
triptime	string	Cumulated trip durations in seconds.
operatingtime	string	Time between start_time and end_time in seconds.
standstill	string	
tours	string	
fuel_usage	float	Fuel consumption in litres, max. three decimals allowed.
co2	int	Carbon dioxide emissions in grams.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to objectno.
energy_usage	float	Energy consumption in kWh. Max. three decimals allowed.

showTracks

Description

This action retrieves a list of positions of a vehicle for a defined period.

If certain information was not available the corresponding results can be empty.

Technical details

SOAP endpoint address / function name tripAndTimeReportingService#showTracks

Request limits	10 requests / minute
----------------	----------------------

Parameters

showTracks requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)
- [Date range filter parameters](#), periods longer than 2 days are not permitted.

Parameters specific to showTracks:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .
externalid	string	For future use. This parameter is optional.

Result

Result for showTracks:

Parameter	Type	Description
pos_time	dateTime	Date and time when the position was registered in WEBFLEET.
receivetime	dateTime	Date and time when the position was received in WEBFLEET.
latitude	int	Geographic latitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd). Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer. See Geographic coordinate conversion on Wikipedia .
longitude	int	Geographic longitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd). Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer. See Geographic coordinate conversion on Wikipedia .
speed	nonNegativeInteger	in km/h
course	nonNegativeInteger	Compass direction in degrees ($0^\circ \dots 360^\circ$):
fuel_usage	float	Fuel consumption in litres, max. three decimals allowed.
odometer	int	Odometer value at the position. Only available for LINK 7xx/6xx/5xx/4xx.
country	string	Country code.

Parameter	Type	Description
state	string	Code for federal state.
energy_usage	float	Energy consumption in kWh. Max. three decimals allowed.

updateLogbook

Descriptions

This action updates some parameters of an existing logbook entry.

When using `updateLogbook`, you only need to include the parameters for which you want to change or delete the values. If you include a parameter and do not indicate a value, the existing value will be deleted.

In addition to the specific parameters listed below the parameters `modifiedby` and `modifiedon` are being automatically stored.

Technical details

SOAP endpoint address / function name `tripAndTimeReportingService#updateLogbook`

Request limits	10 requests / minute
----------------	----------------------

Parameters

`updateLogbook` requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `updateLogbook`:

Parameter	Type	Description
tripid	nonNegativeInteger	This parameter is required.
logflag	string	Indicates the trip mode. Valid values: <ul style="list-style-type: none"> • 1 - Private • 2 - Business • 3 - Commute This parameter is optional.
logpurpose	string (max. 254 characters)	A description of the purpose. This parameter is optional.
logcontact	string (max. 254 characters)	Contact details for this trip; this is typically at the visited party. This parameter is optional.

Parameter	Type	Description
logcomment	string (max. 254 characters)	Any additional annotation for this trip. This parameter is optional.
reason	string (max. 254 characters)	Reason for this trip. This parameter is optional.

showLogbook

Descriptions

This action returns the most recent state of logbook information for an indicated object or trip - this applies to finished trips only.

Technical details

SOAP endpoint address / function name tripAndTimeReportingService#showLogbook

Request limits	10 requests / minute
----------------	----------------------

Parameters

showLogbook requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

showLogbook requires the following other parameters:

- [Date range filter parameters](#) - The maximum range is one year. The date range filter parameter is optional if `tripid` is specified.

Date range filter behaviour

The date range filter applies to the trip end date/time, not the date/time when the trip record was created.

Parameters specific to showLogbook:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .
tripid	nonNegativeInteger	This parameter precedes <code>objectno</code> . This parameter is optional.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .

Parameters specific to showLogbook

Parameter	Type	Description
modified_since	string	<p>Returns all trips that have been manually edited after the indicated date.</p> <p>The format depends on the value of the General parameters lang and useISO8601.</p> <ul style="list-style-type: none"> • lang = de <i>Format:</i> dd.MM.yyyy HH:mm:ss <hr/> <p><i>Example:</i> 13.07.2007 23:59:59</p> <hr/> <ul style="list-style-type: none"> • lang = en <i>Format:</i> dd/MM/yyyy HH:mm:ss <hr/> <p><i>Example:</i> 13/07/2007 23:59:59</p> <hr/> <ul style="list-style-type: none"> • lang = nl <i>Format:</i> d-M-yyyy H:mm:ss <hr/> <p><i>Example:</i> 13-07-2007 23:59:59</p>
		This parameter is optional.

Parameters specific to showLogbook

Result

Result for showLogbook:

Parameter	Type	Description
tripid	string	
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
objectname	string	Display name of an object.
logflag	string	<p>Indicates the trip mode.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 1 - Private • 2 - Business • 3 - Commute • 4 - Odometer correction
start_time	string	The time recorded when this event started.
start_odometer	int	The odometer reading when this event started.
start_postext	string	A detailed textual description of the location where this event started.

Result for showLogbook

Parameter	Type	Description
end_time	string	The time recorded when this event ended.
end_odometer	int	The odometer reading when this event ended.
end_postext	string	A detailed textual description of the location where this event ended.
distance	int	The difference between start_odometer and end_odometer. Unit of measurement is "meters".
logpurpose	string (max. 254 characters)	A description of the purpose.
logcontact	string (max. 254 characters)	Contact details for this trip; this is typically at the visited party.
logcomment	string (max. 254 characters)	Any additional annotation for this trip.
modifiedon	dateTime	ISO 8601 -formatted date and time in the UTC time-zone, combined representation in the extended format. Example: 2007-12-24T16:00:00+02:00
modifiedby	string	The name of the user who issues the last change.
driverno	string	Identifying number of a driver. Unique within an account.
drivername	string	Display name of a driver.
start_addrno	string	Identifying number of an address. Unique within an account.
end_addrno	string	Identifying number of an address. Unique within an account.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to objectno.
start_latitude	int	Geographic latitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd). Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer. See Geographic coordinate conversion on Wikipedia .

Result for showLogbook

Parameter	Type	Description
start_longitude	int	<p>Geographic longitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
end_latitude	int	<p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
end_longitude	int	<p>Geographic longitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
avg_speed	int	The average speed during this trip.
max_speed	int	The maximum speed during this trip.
fuel_usage	float	<p>Fuel consumption in litres.</p> <p>Max. three decimals allowed.</p>
co2	int	Carbon dioxide emissions in grams.
end_addrname1	string	A suggested address based on end position information.
end_addrname2	string	A suggested address based on end position information.
end_addrname3	string	A suggested address based on end position information.
end_addrcontact	strings	<p>A suggested address contact based on end position information.</p>
driveruid	string	<p>A unique, unchangeable identifier for the indicated driver, automatically generated.</p> <p>Can be used alternatively to <code>driverno</code>.</p>

Result for showLogbook

Parameter	Type	Description
energy_usage	float	Energy consumption in kWh. Max. three decimals allowed.

Result for showLogbookHistory

showLogbookHistory

Descriptions

This action returns a logbook history showing logbook edits including the old and new values.

Change history records are available as of 1st of January 2011.

Technical details

SOAP endpoint address / function name tripAndTimeReportingService#showLogbookHistory

Request limits	10 requests / minute
----------------	----------------------

Parameters

showLogbookHistory requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

showLogbookHistory requires the following other parameters:

- [Date range filter parameters](#) - The maximum range is one year. The date range filter parameter is optional if tripid is specified.

Parameters specific to showLogbookHistory:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to objectuid.
tripid	nonNegativeInteger	This parameter precedes objectno.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to objectno.

Result

Result for showLogbookHistory:

Parameter	Type	Description
tripid	string	

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
objectname	string	Display name of an object.
logpurposeold	string	The old description of the purpose.
logcontactold	string	The old contact details for this trip; this is typically at the visited party.
logcommentold	string	The old additional annotation for this trip.
logflagold	string	The previous trip mode.
logpurposenew	string	The new description of the purpose.
logcontactnew	string	The new contact details for this trip; this is typically at the visited party.
logcommentnew	string	The new additional annotation for this trip.
logflagnew	string	The new trip mode
modifiedon	dateTime	ISO 8601 -formatted date and time in the UTC timezone, combined representation in the extended format. Example: 2007-12-24T16:00:00+02:00
modifiedby	string	The name of the user who issued the last change.
reason	string	The reason for the edits.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .

updateLogbookMode

Descriptions

This action changes the driver's logbook mode on the LINK 7xx/6xx/5xx/4xx/3xx. The change of the logbook mode will become effective with the next trip. If `updateLogbookMode` is executed during a trip, this trip will be ended and a new trip using the new logbook mode will be created.

Limitations

- For LINK 3xx - firmware version 1.92 or higher
- For LINK 5xx/4xx - firmware version 2.0 or higher
- For LINK 6xx/7xx - firmware version 4.0 or higher
- The Operational mode for the LINK device must be set to Logbook.

You can set the Operational mode for your object (LINK device) in WEBFLEET as follows:

1. Select your object.
2. Under **Contract / Device** click **Configure** in the details panel on the right.
3. Go to the **Basic settings** tab and select **Logbook** under **Function**.

Note: You cannot change the logbook mode if a digital tachograph is connected to the LINK device.

Technical details

SOAP endpoint address / function name tripAndTimeReportingService#updateLogbookMode

Request limits	10 requests / minute
----------------	----------------------

Parameters

updateLogbookMode requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to updateLogbookMode:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .
logbook_mode	int	The logbook mode to set on the LINK device. Valid values: <ul style="list-style-type: none"> • 1 - private • 2 - business • 3 - commute This parameter is required.

updateLogbookDriver

Descriptions

updateLogbookDriver can be used to change the driver for an existing trip.

Changing the driver after a trip can cause data inconsistencies, for example when managing orders or for some reports. Therefore, this action is disabled by default. Please contact Webfleet Solutions Customer Support to enable this action for your WEBFLEET account.

This action cannot be used for trips of vehicles which have a tachograph connected.

Technical details

SOAP endpoint address / function name tripAndTimeReportingService#updateLogbookDriver

Request limits	10 requests / minute
----------------	----------------------

Parameters

updateLogbookDriver requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to updateLogbookDriver:

Parameter	Type	Description
tripid	nonNegativeInteger	The ID of the trip to which the driver is assigned. This parameter is required.
driverno	string	The driver number of the driver to be assigned to the trip. This parameter is required.

showWorkingTimes

Description

This report shows work time states changes of the (co-)driver, the locations and vehicle.

Technical details

SOAP endpoint address / function name tripAndTimeReportingService#showWorkingTimes

Request limits	6 requests / minute
----------------	---------------------

Parameter restrictions

Before processing a request, all parameters are checked for invalid combinations and an error message is returned if an unacceptable parameter combination is detected.

- The time period covered by date range filter ([Date range filter parameters](#)) may not be greater than 1 month.

Parameters

showWorkingTimes requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

showWorkingTimes requires the following other parameters:

- [Date range filter parameters](#)

Parameters specific to showWorkingTimes:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .
driverno	string	Identifying number of a driver. Unique within an account, case-sensitive. This parameter is required. Can be used alternatively to <code>driveruid</code> .
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .
driveruid	string	A unique, unchangeable identifier for the indicated driver, automatically generated. Can be used alternatively to <code>driverno</code> .
drivergroupname	string	Name of the group of drivers the driver is assigned to, case-sensitive. This parameter is optional.
objectgroupname	string	Name of the group of objects the driver is assigned to, case-sensitive. This parameter is optional.

Result

Result for showWorkingTimes:

Parameter	Type	Description
driverno	string	Identifying number of a driver. Unique within an account.
drivername	string	Display name of a driver.
role	nonNegativeInteger	Valid values: <ul style="list-style-type: none"> • 1 - Driver • 2 - Co-Driver • 3 - Worker
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
objectname	string	Display name of an object.
start_time	string	The time recorded when this event started.
start_odometer	int	The odometer reading when this event started.

Parameter	Type	Description
start_postext	string	A detailed textual description of the location where this event started.
start_addrno	string	Identifying number of an address. Unique within an account.
start_latitude	int	Geographic latitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd). Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer. See Geographic coordinate conversion on Wikipedia .
start_longitude	int	Geographic longitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd). Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer. See Geographic coordinate conversion on Wikipedia .
end_time	string	The time recorded when this event ended.
end_odometer	int	The odometer reading when this event ended.
end_postext	string	A detailed textual description of the location where this event ended.
end_addrno	string	Identifying number of an address. Unique within an account.
end_latitude	int	Geographic latitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd). Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer. See Geographic coordinate conversion on Wikipedia .
end_longitude	int	Geographic longitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd). Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer. See Geographic coordinate conversion on Wikipedia .
workstate	nonNegativeInteger	Valid values: <ul style="list-style-type: none"> • 0 - Unknown • 1 - Free time (PND only) • 2 - Pause (PND and digital tachograph) • 3 - Standby (digital tachograph only) • 4 - Working (PND only) • 5 - Driving (digital tachograph only) • 6 - Other work (digital tachograph only)

Parameter	Type	Description
end_objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
end_objectname	string	
externaldevicetime-offset	string	The offset in system time between external device (currently only digital tachograph) and LINK, in seconds.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .
end_objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .
driveruid	string	A unique, unchangeable identifier for the indicated driver, automatically generated. Can be used alternatively to <code>driverno</code> .

showStandStills

Description

This actions shows a list of all stops for a certain vehicle for a specified period.

Technical details

SOAP endpoint address / function name `tripAndTimeReportingService#showStandStills`

Request limits	6 requests / minute
----------------	---------------------

Parameters

showStandStills requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

showStandStills requires the following other parameters:

- `range_pattern`, see [Date range filter parameters](#).

Parameters specific to **showStandStills**:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .

Parameter	Type	Description
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .
externalid	string	For future use. This parameter is optional.

Result

Result for `showStandStills`:

Parameter	Type	Description
start_time	string	The time recorded when this event started. ISO 8601 -formatted date and time in the UTC timezone, combined representation in the extended format. Example: 2007-12-24T16:00:00+02:00
end_time	string	The time recorded when this event ended. ISO 8601 -formatted date and time in the UTC timezone, combined representation in the extended format. Example: 2007-12-24T16:00:00+02:00
duration	int	The difference between <code>start_time</code> and <code>end_time</code> . Unit of measurement is "seconds".
latitude	int	Geographic latitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd). Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer. See Geographic coordinate conversion on Wikipedia .
longitude	int	Geographic longitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd). Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer. See Geographic coordinate conversion on Wikipedia .
formatted_latitude	string	Geographic latitude in the form GGG° MM' SS.S" N/S in the WGS84 coordinate system.
formatted_longitude	string	Geographic longitude in the form GGG° MM' SS.S" E/W in the WGS84 coordinate system.
addrno		Identifying number of an address. Unique within an account.
postext	string	

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
fuel_usage	float	Fuel consumption in litres, max. three decimals allowed.
co2	int	Carbon dioxide emissions in grams.
fueltype	int	Valid values: <ul style="list-style-type: none"> • 0 - unknown • 1 - diesel • 2 - gasoline • 3 - lpg • 4 - hybrid petrol • 5 - hybrid diesel • 6 - electric
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .
externalid	string	For future use.

showIdleExceptions

Description

This report shows a list of idle exceptions detected by the LINK or ecoPLUS of an object or of all objects of a object group. An idle event occurs when an object is still for more than five minutes with engine running.

The report shows all idle exceptions that have ended within the period defined with the `start_time` and `end_time`.

Technical details

SOAP endpoint address / function name `tripAndTimeReportingService#showIdleExceptions`

Request limits	10 requests / minute
----------------	----------------------

Parameter restrictions

Before processing a request, all parameters are checked for invalid combinations and an error message is returned if an unacceptable parameter combination is detected.

- As historical data is available for 90 days only a historical time period covered by date range filter ([Date range filter parameters](#)) may not start earlier than 90 days in the past.
- A future time period covered by date range ([Date range filter parameters](#)) may not start in the future.
- If no object is specified, the time period covered by date range filter ([Date range filter parameters](#)) may not be greater than 1 day.

- If an object group is specified, the time period covered by date range filter ([Date range filter parameters](#)) may not be greater than 1 day.
- If an object is specified, the time period covered by date range filter ([Date range filter parameters](#)) may not be greater than 1 month.

Note: Only those idle exceptions are reported that end in the requested date and time range. The start time of the idle exception can be outside this range.

Parameters

showIdleExceptions requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

showIdleExceptions requires the following other parameters:

- [Date range filter parameters](#)

Parameters specific to **showIdleExceptions**:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .
objectgroupname	string	Case-sensitive. This parameter is optional.
driverno	string	Identifying number of a driver. Unique within an account, case-sensitive. Can be used alternatively to <code>driveruid</code> .
drivergroupname	string	Name of the group of drivers the driver is assigned to, case-sensitive. This parameter is optional.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .
driveruid	string	A unique, unchangeable identifier for the indicated driver, automatically generated. Can be used alternatively to <code>driverno</code> .

Result

Result for **showIdleExceptions**:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
objectname	string	Display name of an object.

Parameter	Type	Description
driverno	string	Identifying number of a driver. Unique within an account.
drivername	string	Display name of a driver.
start_time	string	The time recorded when this event started.
end_time	string	The time recorded when this event ended.
idle_duration	int	Duration of idle exception interval in seconds.
latitude	int	Geographic latitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd). Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer. See Geographic coordinate conversion on Wikipedia .
longitude	int	Geographic longitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd). Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer. See Geographic coordinate conversion on Wikipedia .
formatted_latitude	string	Geographic latitude in the form GGG° MM' SS.S" N/S in the WGS84 coordinate system.
formatted_longitude	string	Geographic longitude in the form GGG° MM' SS.S" E/W in the WGS84 coordinate system.
addrno		Identifying number of an address. Unique within an account.
postext	string	
fuel_usage	float	Fuel consumption in litres, max. three decimals allowed.
co2	int	Carbon dioxide emissions in grams.
fueltype	int	Valid values: <ul style="list-style-type: none"> • 0 - unknown • 1 - diesel • 2 - gasoline • 3 - lpg • 4 - hybrid petrol • 5 - hybrid diesel • 6 - electric
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .

Parameter	Type	Description
driveruid	string	A unique, unchangeable identifier for the indicated driver, automatically generated. Can be used alternatively to <code>driverno</code> .

getObjectKPIs

Description

Using `getObjectKPIs` you can retrieve one or more KPIs (Key Performance Indicators) specific to an individual object.

Note: `getObjectKPIs` is the successor action of `getKPIs`. All calls to `getKPIs` will be redirected to `getObjectKPIs`.

Technical details

SOAP endpoint address / function name `tripAndTimeReportingService#getObjectKPIs`

Request limits	10 requests / minute
----------------	----------------------

Parameters

`getObjectKPIs` requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

`getObjectKPIs` requires the following other parameters:

- [Date range filter parameters](#)

Parameters specific to `getObjectKPIs`

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .

Parameter	Type	Description
kpinames	string	<p>A comma-separated list of KPI-group names. This parameter is required.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • tripstats • ecostats • optidrive • speedingevents • drivingevents • orders <hr/> <p><i>Example CSV request parameter:</i> kpinames=tripstats,optidrive,orders</p> <hr/>
level	string	<p>The level of temporal aggregation of the calculated KPIs. Defaults to range.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • day • month • range <p>When set to day, the result contains a KPI for each day within the requested date range.</p> <p>When set to month, the result contains one KPI per month (totalised for each month).</p> <p>When set to range, the whole result consists of a single KPI (summarized over the whole date range).</p> <p>This parameter is optional.</p>
externalid	string	For future use. This parameter is optional.

Result

Result for getObjectKPIs

Parameter	Type	Description
objectno	string (10)	<p>Identifying number of an object. Unique within an account, case-sensitive.</p>
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to objectno.</p>
objectname	string	Display name of an object.
year	string (4)	<p>The year the KPIs are calculated for. Format: YYYY Returned if specified in request parameter level.</p>

Parameter	Type	Description
month	string (2)	The month, the KPIs are calculated for. Format: MM Returned if specified in request parameter level.
day	string (2)	The day of month, the KPIs are calculated for. Format: DD Returned if specified in request parameter level.
externalid	string	For future use.
<kpi-list>		The following columns depend on the requested KPI-group names. See table KPI names .

getDriverKPIs

Description

Using `getDriverKPIs` you can retrieve one or more KPIs (Key Performance Indicators) specific to an individual driver.

Technical details

SOAP endpoint address / function name `tripAndTimeReportingService#getDriverKPIs`

Request limits	10 requests / minute
----------------	----------------------

Parameters

`getDriverKPIs` requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

`getDriverKPIs` requires the following other parameters:

- [Date range filter parameters](#)

Parameters specific to `getDriverKPIs`

Parameter	Type	Description
driverno	string (10)	Identifying number of a driver. Unique within an account, case-sensitive. Can be used alternatively to <code>driveruid</code> .
driveruid	string (30)	A unique, unchangeable identifier for the indicated driver, automatically generated. Can be used alternatively to <code>driverno</code> .

Parameter	Type	Description
kpinames	string	<p>A comma-separated list of KPI-group names. This parameter is required.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • tripstats • ecostats • optidrive • speedingevents • drivingevents • orders <hr/> <p><i>Example CSV request parameter:</i> kpinames=tripstats,optidrive,orders</p> <hr/>
level	string	<p>The level of temporal aggregation of the calculated KPIs. Defaults to range.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • day • month • range <p>When set to day, the result contains a KPI for each day within the requested date range.</p> <p>When set to month, the result contains one KPI per month (totalised for each month).</p> <p>When set to range, the whole result consists of a single KPI (summarized over the whole date range).</p> <p>This parameter is optional.</p>

Result

Table 4-221: Result for getDriverKPIs

Parameter	Type	Description
driverno	string (10)	<p>Identifying number of a driver. Unique within an account, case-sensitive.</p>
driveruid	string (30)	A unique, unchangeable identifier for the indicated driver, automatically generated.
drivername	string	Display name of a driver.
year	string (4)	<p>The year the KPIs are calculated for. Format: YYYY Returned if specified in request parameter level.</p>

Parameter	Type	Description
month	string (2)	The month the KPIs are calculated for. Format: MM Returned if specified in request parameter level.
day	string (2)	The day of month the KPIs are calculated for. Format: DD Returned if specified in request parameter level.
<kpi-list>		The following columns depend on the requested KPI-group names. See table KPI names .

getRemainingDrivingTimesEU

Description

getRemainingDrivingTimesEU returns several [Remaining Driving Times](#) for one or multiple drivers according to the rules of the EU. The respective driver must be assigned to a vehicle for which one of the following additional features is booked:

- Remaining Driving Times
- WEBFLEET Tachograph Manager Plus
- WEBFLEET TachoShare Plus

The calculation of [Remaining Driving Times](#) is based on the rules for calculating remaining driving times, working times and infringements. These rules can be configured for each driver by the action [updateDriverRdtRules](#). The action [getDriverRdtRules](#) returns the currently configured rules for a driver.

Disclaimer: The remaining driving times supplied by Webfleet Solutions are indicative and are reliant upon the information being obtained from the tachograph and sent to WEBFLEET via the onboard device installed in a vehicle. The algorithms used to calculate the indicative remaining driving times are based on European driving time legislation and it is your responsibility to verify remaining driving times and any applicable national legislation.

Technical details

SOAP endpoint address / function name tripAndTimeReportingService#getRemainingDrivingTimesEU

Request limits	10 requests / minute
----------------	----------------------

Parameters

getRemainingDrivingTimesEU requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to getRemainingDrivingTimesEU:

Parameter	Type	Description
driverno	string (10)	Identifying number of a driver. Unique within an account, case-sensitive. Can be used alternatively to <code>driveruid</code> .
driveruid	string (30)	A unique, unchangeable identifier for the indicated driver, automatically generated. Can be used alternatively to <code>driverno</code> .
drivergroupname	string	Name of the group of drivers the driver is assigned to, case-sensitive. Can be used alternatively to <code>drivergroupuid</code> .
drivergroupuid	string (30)	A unique, unchangeable identifier for the indicated driver group, automatically generated. Can be used alternatively to <code>drivergroupname</code> .

Result

Result for `getRemainingDrivingTimesEU`:

Parameter	Type	Description
driverno	string (10)	Identifying number of a driver. Unique within an account.
driveruid	string (30)	A unique, unchangeable identifier for the indicated driver, automatically generated.
drivername	string (50)	Display name of a driver.
reference_time	datetime	Timestamp as reference for all remaining driving time values. This value can be used to calculate the timestamp at the end of a remaining time. ISO 8601 -formatted date and time in the UTC timezone, combined representation in the extended format. Example: 2007-12-24T16:00:00+02:00
next_break	integer	Remaining time until the latest possible start of next break in milliseconds. This is the latest possible end of the current driving or working period, limited by the remaining driving and working time of the current shift as well as the end of the shift. The value is negative if the break should have already been started. The value is not available if the driver is on Break .

Parameter	Type	Description
next_break_change	integer	<p>Indicator whether the remaining driving time until the start of next break is constant or in which direction it is currently changing.</p> <p>This information can be used for continuous calculation of remaining time on client side without frequent polling.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • -1 - Remaining time is decreasing. • 0 - Remaining time is constant. • 1 - Remaining time is increasing.
next_rest	integer	<p>Remaining time until the latest possible start of next rest period in milliseconds. This is the latest possible end of the current shift, limited by the resting time requirements and the availability of daily reduced rest periods.</p> <p>The value is negative if the rest should have already been started.</p> <p>The value is not available if the driver is on Break.</p>
next_rest_change	integer	<p>Indicator whether <code>next_rest</code> is constant or in which direction it is currently changing.</p> <p>This information can be used for continuous calculation of remaining time on client side without frequent polling.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • -1 - Remaining time is decreasing. • 0 - Remaining time is constant. • 1 - Remaining time is increasing.
remain_driving_today	integer	<p>Remaining driving time of the current shift in milliseconds. This value is limited by the weekly remaining driving time, the availability of daily driving time extensions and the end of the shift. If Working hours legislation is enabled for the driver, it is also limited by the daily working time.</p> <p>The value is negative if the daily maximum allowed driving time has been exceeded.</p>
remain_driving_todays_change	integer	<p>Indicator whether <code>remain_driving_today</code> is constant or in which direction it is currently changing.</p> <p>This information can be used for continuous calculation of remaining driving time on client side without frequent polling.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • -1 - Remaining time is decreasing. • 0 - Remaining time is constant. • 1 - Remaining time is increasing.
total_driving_today	integer	Total driving time for today in milliseconds.

Parameter	Type	Description
total_driving_today_change	integer	<p>Indicator whether <code>total_driving_today</code> is constant or in which direction it is currently changing.</p> <p>This information can be used for continuous calculation of the driving time on client side without frequent polling.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 0 - Total time is constant. • 1 - Total time is increasing.
max_driving_week	integer	<p>Maximum weekly driving time within the current week in milliseconds. The 90 hours rule during two consecutive weeks is considered. If Working hours legislation is enabled, the value is also limited by the weekly maximum working time.</p>
remain_driving_week	integer	<p>Remaining weekly driving time for the current week in milliseconds which is limited by maximum weekly driving time.</p> <p>The value is negative if the weekly driving time exceeds the maximum weekly driving time.</p>
remain_driving_week_change	integer	<p>Indicator whether <code>remain_driving_week</code> is constant or in which direction it is currently changing.</p> <p>This information can be used for continuous calculation of remaining driving time on client side without frequent polling.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • -1 - Remaining time is decreasing. • 0 - Remaining time is constant. • 1 - Remaining time is increasing.
remain_driving_next_week	integer	<p>Remaining driving time for the next week in milliseconds.</p> <p>The value can be negative.</p>
remain_driving_next_week_change	integer	<p>Indicator whether <code>remain_driving_next_week</code> is constant or in which direction it is currently changing.</p> <p>This information can be used for continuous calculation of remaining driving time on client side without frequent polling.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • -1 - Remaining time is decreasing. • 0 - Remaining time is constant. • 1 - Remaining time is increasing.
max_extended_shifts	integer	Maximum number of allowed daily driving time extensions per week.
extended_shifts	integer	Number of remaining daily driving time extensions in current week.
max_reduced_rests	integer	Maximum number of allowed reduced rests per week.
reduced_rests	integer	Number of remaining reduced rest periods in current week.

Parameter	Type	Description
rest_balances	string	<p>A string that carries a list of balances for reduced rest periods.</p> <p>One rest balance consists of comma separated values:</p> <ul style="list-style-type: none"> • <code>deadline</code> (datetime, timestamp until the balance has to be fulfilled) • <code>duration</code> (integer, balance amount in milliseconds) <p>Multiple rest balances are separated by semicolon.</p> <hr/> <p><i>Example:</i> 2014-07-01T16:00:00Z,120000;2014-07-02T17:00:00Z,500000</p>
infringements	boolean	<code>true</code> if the driver has already committed social infringements.
max_driving_today	integer	Maximum driving time of the current shift in milliseconds. This value is limited by the weekly remaining driving time and the availability of daily driving time extensions. If Working hours legislation is enabled for the driver, it is also limited by the daily working time.
max_working_today	integer	Maximum daily working time of the current shift in milliseconds. This value is limited by the weekly remaining working time. This value is only available if Working hours legislation is enabled for the driver.
remain_working_today	integer	Remaining working time of the current shift in milliseconds, limited by the weekly remaining working time and the end of the shift. This value is only available if Working hours legislation is enabled for the driver.
total_otherwork_todday	integer	The total duration of activity Other work of the current shift in milliseconds.
total_availability_todday	integer	The total duration of activity Availability of the current shift in milliseconds.
last_activity_from_drivercard	datetime	<p>The time at which the last activity included in the downloaded driver card data ended, including manual corrections.</p> <p>ISO 8601-formatted date and time in the UTC timezone, combined representation in the extended format.</p> <hr/> <p><i>Example:</i> 2007-12-24T16:00:00+02:00</p>
next_break_min_duration	integer	Duration of minimum uninterrupted break in milliseconds to finish the current driving or working period.
next_rest_min_duration	integer	Required minimum duration of the next rest in milliseconds.

Parameter	Type	Description
current_shift_start	datetime	<p>Start of the current shift.</p> <p>This value is not available if no shift has started.</p> <p>ISO 8601-formatted date and time in the UTC timezone, combined representation in the extended format.</p>
		Example: 2007-12-24T16:00:00+02:00
latest_end_current_shift	datetime	<p>Latest end of the current shift.</p> <p>This value is not available if no shift has started.</p> <p>ISO 8601-formatted date and time in the UTC timezone, combined representation in the extended format.</p>
		Example: 2007-12-24T16:00:00+02:00
earliest_start_next_shift	datetime	<p>The earliest possible start of the next shift, if the driver would immediately start the daily rest.</p> <p>ISO 8601-formatted date and time in the UTC timezone, combined representation in the extended format.</p>
		Example: 2007-12-24T16:00:00+02:00
max_working_week	integer	<p>The maximum weekly working time of the current week in milliseconds. Limited by a weekly maximum and the average weekly working time.</p> <p>This value is only available if Working hours legislation is enabled for the driver.</p>
remain_working_week	integer	<p>Remaining working time of the current week in milliseconds limited by the maximum weekly working time.</p> <p>This value is only available if Working hours legislation is enabled for the driver.</p>

KPI names

KPI group	Returned column	Description
tripstats	tripstats_count	Number of trips that ended within the defined period.
	tripstats_mileage	Total mileage of all trips that ended within the defined period (in meters).
	tripstats_mileagebusiness	Total mileage of all trips that ended within the defined period in business or unknown mode (in meters).
	tripstats_mileageprivate	Total mileage of all trips that ended within the defined period in private or commute mode (in meters).

KPI group	Returned column	Description
	tripstats_drivingtime	<p>Total trip time minus the total idling time of all trips that ended within the defined period (in seconds).</p> <p>Note: The first trip may start before the defined period and thus the total driving time may exceed the length of the defined period.</p>
	tripstats_usagetime	<p>Latest end time minus earliest start time of all trips that ended within a day.</p> <p>If the defined period covers more than one day, <code>usagetime</code> is the sum of the daily usage times of all covered days.</p> <p>Note: The earliest start time may be on a previous day and thus the daily usage time may exceed 24 hours.</p>
ecostats	ecostats_fuelusage	Total amount of fuel consumed within the defined period (in milliliters).
	ecostats_co2emission	Total amount of carbon dioxide emitted within the defined period (in gram).
	ecostats_wastedfuel	Total amount of fuel wasted while idling within the defined period (in milliliters).
	ecostats_idletime	Total idling time within the defined period (in seconds).
	ecostats_overrevvingtime	Total driving time with high RPM within the defined period (in seconds).
optidrive	optidrive_indicator	The value of the OptiDrive indicator for the defined period. Its value ranges from 0.0 (bad) to 1.0 (good).
	optidrive_indicator_speeding	Value of influencing variable for speeding events, ranging from 0.0 to 1.0 (good).
	optidrive_indicator_driving	Value of influencing variable for driving events, ranging from 0.0 to 1.0.
	optidrive_indicator_idling	Value of influencing variable for idling events, ranging from 0.0 to 1.0.
	optidrive_indicator_fuel	Value of influencing variable for fuel consumption, ranging from 0.0 to 1.0.
speedingeventsspeedingevents	speedingevents_count	<p>Total number of all speeding-exception intervals that ended within the defined period.</p> <p>A speeding exception is reported if the vehicle speed was continuously over the speed limit, with a tolerance given by an account setting, for at least 30 seconds.</p> <p>The speed limit is the minimum of road-speed limit and vehicle-speed limit.</p>
speedingevents_speedingtime		Average length of all speeding-exception intervals that ended within the defined period (in seconds).

KPI group	Returned column	Description
	speedingevents_avg_violation	Average violation of the speed limit of all speed-exception intervals that ended within the defined period (in km/h).
drivingevents	drivingevents_count	Total number of driving events (braking, steering) registered within the defined period.
	drivingevents_avg_severity	Average severity of the driving events. The severity ranges from 1 (weak) to 5 (strong) and is dependent on the event type (braking or steering), the vehicle type, and the speed at the time when the event happened.
	drivingevents_braking_count	Total number of braking events registered within the defined period.
	drivingevents_braking_avg_severity	Average severity of the braking events.
	drivingevents_steering_count	Total number of steering events registered within the defined period.
	drivingevents_steering_avg_severity	Average severity of the steering events.
orders	orders_completed	Total number of all orders that have been completed within the defined period.
	orders_cancelled	Total number of all orders that have been cancelled or rejected within the defined period.
	orders_ontime	Total number of completed orders (as defined above), whose event time is less than or equal to the planned arrival time.

Miscellaneous reports

showIORReportExtern

Description

This action returns a list of events recorded with the inputs and outputs of the LINK device.

Technical details

SOAP endpoint address / function name tripAndTimeReportingService#showIORReport

Request limits	10 requests / minute
----------------	----------------------

Parameters

showIORReportExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

showIORReportExtern requires the following other parameters:

- [Date range filter parameters](#)

Parameters specific to **showIORReportExtern**:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
iofilter	string	Name of a digital input. Can be specified multiple times to get combinations of all the specified inputs.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .

Result

Result for **showIORReportExtern**:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Maximum capacity is 40 bytes, actual number of characters depends on the byte count consumed by the UTF-8 encoding of those characters.

Parameter	Type	Description
objectname	string	Display name of an object.
start_time	string	The time recorded when this event started.
start_odometer	int	The odometer reading when this event started.
start_postext	string	A detailed textual description of the location where this event started.
end_time	string	The time recorded when this event ended.
end_odometer	int	The odometer reading when this event ended.
end_postext	string	A detailed textual description of the location where this event ended.
reference	string	Name of the input or output channel.
distance	int	The difference between start_odometer and end_odometer. Unit of measurement is "meters".
duration	int	The difference between start_time and end_time. Unit of measurement is "seconds".
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to objectno.

showAccelerationEvents

Description

This action shows unwanted driver behaviour. It shows a list of events with information on excessive acceleration, breaking or cornering, based on a threshold defined by the user. These events only cover short time periods, e.g. two to four seconds for a sharp turn.

Technical details

SOAP endpoint address / function name tripAndTimeReportingService#showAccelerationEvents

Request limits	10 requests / minute
----------------	----------------------

Parameter restrictions

Before processing a request, all parameters are checked for invalid combinations and an error message is returned if an unacceptable parameter combination is detected.

One of the following parameters is mandatory:

- objectno
- objectuid
- objectgroupname
- driverno

- driveruid
- drivergroupname

Parameters

showAccelerationEvents requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

`showAccelerationEvents` requires the following other parameters:

- [Date range filter parameters](#)

Parameters specific to `showAccelerationEvents`:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
driverno	string	Identifying number of a driver. Unique within an account. Search for the specified driver number. Can be used alternatively to <code>driveruid</code> .
drivergroupname	string	Name of the group of drivers the driver is assigned to, case-sensitive. This parameter is optional.
avg_accel	int	Acceleration in milli-g. This value is the lower threshold used for including acceleration events with an average acceleration higher than indicated. Use this value to limit the size of the result list and receive events with more relevant severity. Varies between a minimum of 0 and a maximum of approx.1100. <ul style="list-style-type: none"> • ≤ 449 - very low severity • 450 to 549 - low severity • 550 to 649 - medium severity • 650 to 749 - high severity • ≥ 750 - very high severity The result may not include average acceleration in the very low severity range. This parameter is optional.

Parameter	Type	Description
accelerationtypes	int	<p>Specifies which acceleration types will be reported.</p> <p>You can specify multiple values for this parameter. Separate the values by comma when using the CSV interface.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 0 - acceleration (can be enabled on request) • 1 - brake • 2 - steering left • 3 - steering right <p>When you do not indicate the parameter the types 1,2 and 3 will be returned.</p>
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated.</p> <p>Can be used alternatively to <code>objectno</code>.</p>
externalid	string	For future use. This parameter is optional.
driveruid	string	<p>A unique, unchangeable identifier for the indicated driver, automatically generated.</p> <p>Can be used alternatively to <code>driverno</code>.</p>

Result

Result for `showAccelerationEvents`:

Parameter	Type	Description
objectno	string (10)	<p>Identifying number of an object.</p> <p>Unique within an account, case-sensitive.</p>
objectname	string	Display name of an object.
driverno	string	Identifying number of a driver. Unique within an account.
drivername	string	Display name of a driver.
start_time	Date	<p>Event start.</p> <p>ISO 8601-formatted date and time in the UTC timezone, combined representation in the extended format.</p> <p>Example: 2007-12-24T16:00:00+02:00</p>
end_time	Date	<p>Event end.</p> <p>ISO 8601-formatted date and time in the UTC timezone, combined representation in the extended format.</p> <p>Example: 2007-12-24T16:00:00+02:00</p>

Parameter	Type	Description
start_speed	float	The speed measured at the start of the acceleration event in km/h.
end_speed	float	The speed measured at the end of the acceleration event in km/h.
max_accelspeed	float	The speed at which the maximum acceleration during the acceleration event was measured in km/h.
avg_accel	int	<p>Acceleration in milli-<i>g</i>.</p> <p>Varies between a minimum of 0 and a maximum of 2000.</p> <ul style="list-style-type: none"> • ≤ 449 - very low severity • 450 to 549 - low severity • 550 to 649 - medium severity • 650 to 749 - high severity • ≥ 750 - very high severity
max_accel	int	Acceleration in milli- <i>g</i> .
accel_dir	int	<p>Direction of the acceleration in relation to the vehicle, in degrees.</p> <ul style="list-style-type: none"> • 0 - min • 360 - max <p>Understand the values as follows:</p> <ul style="list-style-type: none"> • 315–45 - forward acceleration (can be enabled on request) • 45–135 - cornering to the left • 135–225 - braking • 225–315 - cornering to the right
accel_type	nonNegativeInteger	<p>Possible values are:</p> <ul style="list-style-type: none"> • 0 - acceleration (can be enabled on request) • 1 - brake • 2 - steering left • 3 - steering right
latitude	int	<p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
longitude	int	<p>Geographic longitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>

Parameter	Type	Description
postext	string	Position at event end time.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .
duration	int	The duration of the event, in milliseconds.
severity	float	Severity of the event. Dependent on event type (braking or steering), vehicle type, and speed. Ranges from 1.0 to 5.0.
roadspeedlimit	float	The actual road speed limit taken from the map data in km/h.
externalid	string	For future use.
driveruid	string	A unique, unchangeable identifier for the indicated driver, automatically generated. Can be used alternatively to <code>driverno</code> .

showSpeedingEvents

Description

This action shows unwanted driver behaviour. It shows a list of trips or part of trips with information on excessive speeding.

Technical details

SOAP endpoint address / function name `tripAndTimeReportingService#showSpeedingEvents`

Request limits	10 requests / minute
----------------	----------------------

Parameter restrictions

Before processing a request, all parameters are checked for invalid combinations and an error message is returned if an unacceptable parameter combination is detected.

One of the following parameters is mandatory:

- `objectno`
- `objectuid`
- `objectgroupname`
- `driverno`
- `driveruid`
- `drivergroupname`

Parameters

showSpeedingEvents requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

`showSpeedingEvents` requires the following other parameters:

- [Date range filter parameters](#)

Parameters specific to `showSpeedingEvents`:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
driverno	string	Identifying number of a driver. Unique within an account. Search for the specified driver number. Can be used alternatively to <code>driveruid</code> .
objectgroupname	string	A name of an object group.
drivergroupname	string	Name of the group of drivers the driver is assigned to, case-sensitive. This parameter is optional.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .
externalid	string	For future use. This parameter is optional.
driveruid	string	A unique, unchangeable identifier for the indicated driver, automatically generated. Can be used alternatively to <code>driverno</code> .

Result

Result for `showSpeedingEvents`:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
objectname	string	Display name of an object.
driverno	string	Identifying number of a driver. Unique within an account.
drivername	string	Display name of a driver.
start_time	string	The time recorded when this event started.

Parameter	Type	Description
start_longitude	int	<p>Geographic longitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
start_latitude	int	<p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
start_postext	string	A detailed textual description of the location where this event started.
end_time	string	The time recorded when this event ended.
end_longitude	int	<p>Geographic longitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
end_latitude	int	<p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
end_postext	string	A detailed textual description of the location where this event ended.
max_speed	int	Maximum speed driven during the speeding event.
min_speed	string	Minimum speed driven during the speeding event.
avg_speed	int	The average speed driven during the speeding event.
object_speedlimit	float	The speed limit defined for the vehicle in km/h.
road_speedlimit	float	Information about actual speed limits for the specific road taken from map data in km/h.
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated.</p> <p>Can be used alternatively to <code>objectno</code>.</p>
duration	int	The duration of the event, in milliseconds.
distance	int	The distance the vehicle was speeding, in meters.

Parameter	Type	Description
externalid	string	For future use.
driveruid	string	A unique, unchangeable identifier for the indicated driver, automatically generated. Can be used alternatively to driverno.

showDigitalInputStateMileage

Description

This action returns all possible switching state combinations of digital inputs along with the mileage for each combination.

Technical details

SOAP endpoint address / function name	tripAndTimeReportingService#showDigitalInputStateMileage
Request limits	10 requests / minute

Parameters

showDigitalInputStateMileage requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

showDigitalInputStateMileage requires the following other parameters:

- [Date range filter parameters](#)

Parameters specific to showDigitalInputStateMileage:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
iofilter	string	Name of a digital input. Can be specified multiple times to get combinations of all the specified inputs.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to objectno.

Parameters specific to showDigitalInputStateMileage

Result

Result for showDigitalInputStateMileage:

Parameter	Type	Description
names	string	Names of the digital inputs. Separated by comma.
statuses	string	States of the inputs (ON/OFF), separated by comma.
distance	int	The distance driven with the specific input combination. Unit of measurement is "meters".

Result for showDigitalInputStateMileage

Geocoding and routing

geocodeAddress

Description

Geocodes the address provided as request parameters and returns all possible matches, one per line.

Technical details

SOAP endpoint address / function name addressService#geocodeAddress

Request limits	900 requests / hour
----------------	---------------------

Validating the response

If the request returns one or multiple matches, the result needs to be validated, e.g. by comparing it to the input parameters, because the result might not be as expected (e.g. due to typing errors) and could result in driving to the wrong destination if used without validation.

Parameters

geocodeAddress requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to geocodeAddress:

Parameter	Type	Description
addrstreet	string (50)	
addrstreetnumber	string (10)	
addrzip	string (10)	
addrcity	string (50)	
addrcountry	string (2)	ISO 3166-1 alpha-2 code for the country (capital letters).

Parameter	Type	Description
freetext	string (512)	Address to geocode in unstructured format. This string can contain all parts of the address separated using spaces.
<i>Example:</i> Oosterdoksstraat 114 Amsterdam NL		
Note: When you use freetext search we recommend not to use the structured parameters. The closer a freetext query is to a structured formatted address the better results you will achieve. Using freetext search you can also search for POIs. This depends on the country and the availability of POI information.		

Result

Result for geocodeAddress:

Parameter	Type	Description
addrstreet	string (50)	
addrstreetnumber	string (10)	
addrzip	string (10)	
addrcity	string (50)	
addrcountry	string (2)	ISO 3166-1 alpha-2 code for the country (capital letters). This parameter is required.
postext	string	
formatted_longitude	string	Geographic longitude in the form GGG° MM' SS.S" E/W in the WGS84 coordinate system.
formatted_latitude	string	Geographic latitude in the form GGG° MM' SS.S" N/S in the WGS84 coordinate system.
longitude	int	Geographic longitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd). Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer. See Geographic coordinate conversion on Wikipedia .
latitude	int	Geographic latitude in the WGS84 coordinate system. Unit of measurement is micro degrees (10^{-6} grd). Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer. See Geographic coordinate conversion on Wikipedia .

Parameter	Type	Description
additional_information		<p>Contains the following, separated by a semicolon:</p> <p>score - Value between 1 and 0, where 1 is best score and 0 is worst. It is possible that multiple records are returned with the same score. The score is not a measure of absolute accuracy. If a query returns only approximate matches, the best of those will be given a score of 1.0.</p> <p>type - The information returned can give you an idea of which type of match the geocoder has found. Important: Don't rely on the possible value, as they can change without further notice.</p>

calcRouteSimpleExtern

Description

Determines the route from a start location to an end location and calculates the resulting estimated time of arrival for a specific route-type. Optionally IQ Routes and/or HD Traffic information can be included.

Note: If you use this action together with our SOAP interface, please make sure you specify the start time to avoid it being set to the beginning of the day, which is usually already in the past.

Technical details

SOAP endpoint address / function name addressService#calcRouteSimple

Request limits	6 requests / minute
----------------	---------------------

Parameters

calcRouteSimpleExtern requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to calcRouteSimpleExtern:

Parameter	Type	Description
route_type	nonNegativeInteger	<p>Defines type of route type for calculation of estimated time of arrival.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 0 - Quickest • 1 - Shortest • 2 - Avoid motorway • 3 - Walk • 4 - Bicycle <p>Defaults to 0.</p> <p>This parameter is optional.</p>

Parameter	Type	Description
use_traffic	nonNegativeInteger	<p>Defines if traffic information needs to be taken into account for calculating the route and estimated time of arrival.</p> <p>Default:</p> <ul style="list-style-type: none"> • if <code>start_datetime</code> is used - 0 • if <code>start_datetime</code> is not used - 1 <p>Valid values:</p> <ul style="list-style-type: none"> • 0 - don't use traffic • 1 - use traffic <p>Note: If <code>use_traffic</code> is set to 1, the current traffic situation is used to calculate the best route and the estimated time of arrival. This works only if the departure time is less than 30 minutes in the future.</p>
		This parameter is optional.
start_datetime	dateTime	<p>Defines the departure date and time. If specified, overrules <code>start_day</code> and <code>start_time</code>.</p> <p>Defaults to the current day and time.</p>
start_day	string	<p>Defines the weekday of departure.</p> <p>If <code>start_day</code> is specified it is used together with <code>start_time</code>, overruling the default of <code>start_datetime</code>. Case-sensitive.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • mon • tue • wed • thu • fri • sat • sun • today <p>Defaults to the current day.</p>
start_time	string	<p>Defines the departure time.</p> <p>If <code>start_time</code> is specified, it is used together with <code>start_day</code> overruling the default of <code>start_datetime</code>.</p> <p>Defaults to the current time.</p>
use_tollroads	nonNegativeInteger	<p>Defines if toll roads should be avoided for and the route calculation.</p> <p>Possible values are:</p> <ul style="list-style-type: none"> • 0 - Avoid toll roads • 1 - Include toll roads <p>Defaults to 1.</p>

Parameter	Type	Description
start_latitude	int	<p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p> <p>This parameter is required.</p>
start_longitude	int	<p>Geographic longitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p> <p>This parameter is required.</p>
end_latitude	int	<p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p> <p>This parameter is required.</p>
end_longitude	int	<p>Geographic longitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p> <p>This parameter is required.</p>

Result

Result for calcRouteSimpleExtern:

Parameter	Type	Description
end_datetime	string	<p>The calculated arrival date and time.</p> <p>Empty if no <code>start_datetime</code> is specified and <code>start_day</code> or <code>start_time</code> is specified.</p>

Parameter	Type	Description
end_day	string	<p>Valid values:</p> <ul style="list-style-type: none"> • mon • tue • wed • thu • fri • sat • sun <p>Empty if <code>start_datetime</code> is specified.</p>
end_time	string	<p>The calculated arrival time.</p> <p>Empty if <code>start_datetime</code> is specified.</p>
distance	int	Distance to destination (in meters).
time	string	<p>The calculated duration of a trip from the departure location to the destination location.</p> <p>The unit of measurement is "seconds".</p>
delay	string	<p>Estimated delay for a trip due to traffic.</p> <p>The unit of measurement is "seconds".</p>
timezone_offset	string	<p>Timezone offset.</p> <p>The unit of measurement is "seconds".</p>

Configuration and security

showSettings

Description

showSettings shows a number of WEBFLEET settings.

Currently showSettings returns OptiDrive indicator related account settings only. The settings indicate the weight given to each influencing variable used for the calculation of the OptiDrive indicator.

In WEBFLEET, when you move a slider of a variable under **Settings** in the **Reporting** tab, the given weight in relation to the weight of the other three variables is indicated in brackets.

Technical details

SOAP endpoint address / function name configurationAndSecurityService#showSettings

Request limits	10 requests / minute
----------------	----------------------

Parameters

showSettings requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to showSettings:

Parameter	Type	Description
target_username	string	<p>The username of the WEBFLEET user for whom the user specific settings shall be retrieved in addition to the account-wide settings.</p> <p>Note: If not specified, settings will be returned on account level.</p> <p>This parameter is optional.</p>

Result

Result for showSettings:

Parameter	Type	Description
od_weight_idling	float	<p>The weight given to idling information used for the calculation of the OptiDrive indicator.</p> <p>The value indicates the total influence of the available information in relation to the other three variables influencing the OptiDrive indicator.</p>

Parameter	Type	Description
od_weight_speeding	float	<p>The weight given to speeding information used for the calculation of the OptiDrive indicator.</p> <p>The value indicates the total influence of the available information in relation to the other three variables influencing the OptiDrive indicator.</p>
od_weight_drivingevents	float	<p>The weight given to information about driving events used for the calculation of the OptiDrive indicator.</p> <p>The value indicates the total influence of the available information in relation to the other three variables influencing the OptiDrive indicator.</p>
od_weight_fuelusage	float	<p>The weight given to fuel consumption information used for the calculation of the OptiDrive indicator.</p> <p>The value indicates the total influence of the available information in relation to the other three variables influencing the OptiDrive indicator.</p>
distanceunit	string	<p>The preferred distance unit set in the application, for example WEBFLEET user interface.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • km • mi <div style="background-color: #f0f0f0; padding: 10px; margin-top: 10px;"> Note: All values returned by WEBFLEET.connect actions deliver metric values no matter which distanceunit is set. </div>
timezone	string	<p>Valid values are known time zones, for example:</p> <ul style="list-style-type: none"> • Europe/Berlin • Europe/London • America/Toronto • ...
block_pwdattack	int	<p>Valid values:</p> <ul style="list-style-type: none"> • 1 - enabled • 0 - disabled <div style="background-color: #f0f0f0; padding: 10px; margin-top: 10px;"> Note: If set to 1, the user's login credential will be blocked after having entered a wrong password multiple times. This is a security feature that protects credentials against password attacks. </div>
order_destinationnotification	int	<p>Indicates if a notification is created when the object approaches the order destination.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 1 - enabled • 0 - disabled

Parameter	Type	Description
order_destinationnotification_minutes	int	The time before arrival when a notification is created automatically, in minutes.
order_destinationnotification_eventlevel	int	The eventlevel of the notification, see Parameters specific to showEventReportExtern .
order_defaulttype	int	Valid values: <ul style="list-style-type: none">• 1 - service order• 2 - pickup order• 3 - delivery order
order_rejectionallowed	int	Valid values: <ul style="list-style-type: none">• 1 - enabled• 0 - disabled
fuelconsumption	float	This is the fleet's reference value for fuel consumption reporting in l/100km. May be empty if not used.
fueltype	int	Valid values: <ul style="list-style-type: none">• 0 - unknown• 1 - diesel• 2 - gasoline• 3 - lpg
speedlimit	float	Speed limit on account level used for reports, in km/h.
speedlimit_tolerance	int	This value indicates the percentage above the speed limit that vehicles are allowed to travel before WEBFLEET records that the vehicle is breaking the speed limit. The values range from 0 ... 100.
od_weight_coasting	float	The weight given to coasting information used for the calculation of the OptiDrive indicator. The value indicates the total influence of the available information in relation to the other variables influencing the OptiDrive indicator.
od_weight_constantspeed	float	The weight given to constant speed information used for the calculation of the OptiDrive indicator. The value indicates the total influence of the available information in relation to the other variables influencing the OptiDrive indicator.
od_weight_greenspeed	float	The weight given to green speed information used for the calculation of the OptiDrive indicator. The value indicates the total influence of the available information in relation to the other variables influencing the OptiDrive indicator.

Parameter	Type	Description
od_weight_high-revving	float	<p>The weight given to gear shifting (high revving) information used for the calculation of the OptiDrive indicator.</p> <p>The value indicates the total influence of the available information in relation to the other variables influencing the OptiDrive indicator.</p>
energy_consumption	float	<p>This is the fleet's reference value for energy consumption reporting in kWh/100km.</p> <p>May be empty if not used.</p>

createSession

Description

Using **createSession** a session on the server will be created. The result structure contains a `sessiontoken`, also see [Authentication parameters](#). For the lifetime of the session that is usually ~60 minutes, this token can be used alternatively to `account`, `username` or `password` to authorise further requests to WEBFLEET.connect.

Technical details

SOAP endpoint address / function name `configurationAndSecurityService#createSession`

Request limits	10 requests / hour
----------------	--------------------

Parameters

createSession requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Result

Result for **createSession**:

Parameter	Type	Description
sessiontoken	string (32)	<p>A server-generated alphanumeric random string. Within the session lifetime, the Authentication parameters <code>account</code>, <code>username</code> and <code>password</code> can be omitted for further requests. Instead, only the new request parameter <code>sessiontoken</code> is needed to identify the user's session.</p> <p>Note: <code>sessiontoken</code> is bound to the IP address of the client, that requested this <code>sessiontoken</code>. Therefore the <code>sessiontoken</code> cannot be used from other computers.</p>
timetolive	nonNegativeInteger	<p>Maximum lifetime of the session in seconds.</p> <p>After this time, the <code>sessiontoken</code> becomes invalid, no matter if requests happened in the meantime.</p> <p>Typical value: 3600 (60 minutes)</p>

Parameter	Type	Description
timetoidle	nonNegativeInteger	Maximum time between two requests in seconds. The idle-timeout is used by the server to detect unused sessions. Typical value: 1800 (30 minutes)
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. This value is returned, when the user is assigned to one object only. Can be used alternatively to objectno.
externalid	string	For future use.
passwordexpiration	dateTime	The expiration time of the password. ISO 8601-formatted date and time in UTC timezone, combined representation in the extended format. <i>Example: 2013-06-24T16:00:00Z</i> Empty if the setting password expiration is disabled or no timestamp of the last password change exists.

terminateSession

Description

Using `terminateSession` you can invalidate a session that was created using [createSession](#). After that you can create a new session.

Technical details

SOAP endpoint address / function name `configurationAndSecurityService#terminateSession`

Request limits	10 requests / minute
----------------	----------------------

Parameters

terminateSession requires the following common parameters:

- [Authentication parameters](#), `sessiontoken` is required
- [General parameters](#)

Note: `terminateSession` does not require any specific parameters. You only need to indicate `sessiontoken` of the session that you want to invalidate, see [Authentication parameters](#).

showAccountOrderStates

Description

`showAccountOrderStates` retrieves the list of order states and their properties. The properties indicate if the respective order state appears in the order workflow and whether a notification shall be created

when the respective order state was reported. These settings apply to all newly created orders within the WEBFLEET account.

The settings of properties of order states correspond to the settings you can make in the WEBFLEET user interface.

Technical details

SOAP endpoint address / function name configurationAndSecurityService#showAccountOrderStates

Request limits	10 requests / minute
----------------	----------------------

Parameters

showAccountOrderStates requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Result

Result for showAccountOrderStates:

Parameter	Type	Description
orderstate	int	<p>The state of the progress of an order.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 101 - Received • 102 - Read • 103 - Accepted • 201 - Service order started • 202 - Arrived at destination • 203 - Work started • 204 - Work finished • 205 - Departed from destination • 222 - Arrived at pick up location • 223 - Pick up started • 224 - Pick up finished • 225 - Departed from pick up location • 242 - Arrived at delivery location • 243 - Delivery started • 244 - Delivery finished • 245 - Departed from delivery location • 298 - Resumed • 299 - Suspended • 301 - Cancelled • 302 - Rejected • 401 - Finished <p>The following order states are handled according to the settings made for order state 201:</p> <ul style="list-style-type: none"> • 221 - Pickup order started • 241 - Delivery order started

Parameter	Type	Description
enabled	int	<p>Indicates whether the respective order state appears in the order workflow on the navigation device.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 0 - false • 1 - true <p>The following order states can be enabled or disabled:</p> <ul style="list-style-type: none"> • 202 - Arrived at destination • 203 - Work started • 204 - Work finished • 205 - Departed from destination • 222 - Arrived at pick up location • 223 - Pick up started • 224 - Pick up finished • 225 - Departed from pick up location • 242 - Arrived at delivery location • 243 - Delivery started • 244 - Delivery finished • 245 - Departed from delivery location
eventlevel	int	<p>Event level.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • <empty> - No event is created. • 2 - Warning

updateAccountOrderState

Description

updateAccountOrderState updates the properties of an order state. This update applies to all newly created orders within an account. Previously created orders are not affected by this change.

Note: If you want to update the properties of multiple order states for the whole account you have to update each order state separately.

Technical details

SOAP endpoint address / function name configurationAndSecurityService#updateAccountOrderState

Request limits	50 requests / hour
----------------	--------------------

Parameters

updateAccountOrderState requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to updateAccountOrderState:

Parameter	Type	Description
orderstate	int	<p>The state of the progress of an order.</p> <p>Valid values:</p> <ul style="list-style-type: none">• 101 - Received• 102 - Read• 103 - Accepted• 201 - Service order started• 202 - Arrived at destination• 203 - Work started• 204 - Work finished• 205 - Departed from destination• 222 - Arrived at pick up location• 223 - Pick up started• 224 - Pick up finished• 225 - Departed from pick up location• 242 - Arrived at delivery location• 243 - Delivery started• 244 - Delivery finished• 245 - Departed from delivery location• 298 - Resumed• 299 - Suspended• 301 - Cancelled• 302 - Rejected• 401 - Finished <p>The following order states are handled according to the settings made for order state 201:</p> <ul style="list-style-type: none">• 221 - Pickup order started• 241 - Delivery order started <p>This parameter is required.</p>

Parameter	Type	Description
enabled	int	<p>Indicates whether the respective order state appears in the order workflow on the navigation device.</p> <p>Valid values are:</p> <ul style="list-style-type: none"> • 0 - false • 1 - true <p>The following order states can be enabled or disabled:</p> <ul style="list-style-type: none"> • 202 - Arrived at destination • 203 - Work started • 204 - Work finished • 205 - Departed from destination • 222 - Arrived at pick up location • 223 - Pick up started • 224 - Pick up finished • 225 - Departed from pick up location • 242 - Arrived at delivery location • 243 - Delivery started • 244 - Delivery finished • 245 - Departed from delivery location <p>This parameter is required.</p>
eventlevel	int	<p>Event level.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • <empty> • 2 - Warning <p>This parameter is optional.</p>

showAccountOrderAutomations

Description

showAccountOrderAutomations retrieves the list of order automation steps. These properties indicate if an order shall be automatically accepted, started, navigated to etc. or if the driver shall be asked to actively confirm the steps. These settings apply to all newly created orders within the WEBFLEET account.

The settings of the order workflow control correspond to the settings you can make in the WEBFLEET user interface.

Technical details

SOAP endpoint address / function name configurationAndSecurityService#showAccountOrderAutomations

Request limits	10 requests / minute
----------------	----------------------

Parameters

showAccountOrderAutomations requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Result

Result for showAccountOrderAutomations:

Parameter	Type	Description
automation	int	<p>Workflow step that can be automated.</p> <p>Valid values:</p> <ul style="list-style-type: none">• 1 - accept the order• 2 - start the order• 3 - navigate to the order destination• 4 - skip displaying the route summary screen• 5 - delete the order after it has been finished• 6 - suppress the "continue with next order" screen
enabled	int	<p>Indicates whether the respective step is automated.</p> <p>Valid values:</p> <ul style="list-style-type: none">• 0 - false• 1 - true, the step is automated

updateAccountOrderAutomation

Description

updateAccountOrderAutomation updates the properties of the workflow steps of orders. This update applies to all newly created orders within an account. Previously created orders are not affected by this change. You can update multiple workflow steps by running the action for each step separately.

Technical details

SOAP endpoint address / function name configurationAndSecurityService#updateAccountOrderAutomation

Request limits 10 requests / minute

Parameters

updateAccountOrderAutomation requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to updateAccountOrderAutomation:

Parameter	Type	Description
orderautomation	int	<p>Workflow step that can be automated.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 1 - accept the order • 2 - start the order • 3 - navigate to the order destination • 4 - skip displaying the route summary screen • 5 - delete the order after it has been finished • 6 - suppress the "continue with next order" screen <p>Available on PRO devices with firmware version 10.533 or higher.</p> <p>This parameter is required.</p>
enabled	int	<p>Indicates whether the respective step is automated.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 0 - false • 1 - true, workflow step is automated <p>This parameter is required.</p>

getAccountStatusMessages

Description

getAccountStatusMessages returns the predefined status messages for the WEBFLEET account. This includes both free text and order related status messages which are visible as predefined messages on the navigation device. By default the units synchronise these account status messages.

For a configuration for individual objects refer to [getStatusMessages](#).

Technical details

SOAP endpoint address / function name configurationAndSecurityService#getAccountStatusMessages

Request limits	10 requests / minute
----------------	----------------------

Parameters

getAccountStatusMessages requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Result

Result for getAccountStatusMessages:

Parameter	Type	Description
type	string	Indicates the type of status message. Valid values: <ul style="list-style-type: none">• text• order
index	nonNegativeInteger	The index of the predefined message Range: 1 ... 15
text	string	The text of the predefined status message.
eventlevel	nonNegativeInteger	The level of the reported event. Valid values: <ul style="list-style-type: none">• <empty> - just the message• 1 - Notice/information• 2 - Warning• 3 - Alarm 1• 4 - Alarm 2• 5 - Alarm 3

getStatusMessages

Description

getStatusMessages returns the predefined status messages for a single object. This applies to both free text and order related status messages which are visible as predefined messages on the navigation device. By default these messages are synchronised with the status messages in the WEBFLEET account.

For account-wide configuration please refer to [getAccountStatusMessages](#).

Technical details

SOAP endpoint address / function name configurationAndSecurityService#getStatusMessages

Request limits	10 requests / minute
----------------	----------------------

Parameters

getStatusMessages requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to getStatusMessages:

Parameter	Type	Description
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. If objectno is not indicated this parameter is mandatory.

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. If objectuid is not indicated this parameter is mandatory.

Result

Result for getStatusMessages:

Parameter	Type	Description
type	string	Indicates the type of status message. Valid values: <ul style="list-style-type: none">• text• order
index	nonNegativeInteger	The index of the predefined message. Range: 1 ... 15
text	string	The text of the predefined status message.
eventlevel	nonNegativeInteger	The level of the reported event. Valid values: <ul style="list-style-type: none">• <empty> - just the message• 1 - Notice/information• 2 - Warning• 3 - Alarm 1• 4 - Alarm 2• 5 - Alarm 3

setVehicleConfig

Description

Using `setVehicleConfig` you can change one or more LINK specific configurations at once.

Technical details

SOAP endpoint address / function name `configurationAndSecurityService#setVehicleConfig`

Request limits	30 requests / hour
----------------	--------------------

Parameters

setVehicleConfig requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to setVehicleConfig:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Indicate either <code>objectno</code> or <code>objectuid</code> .
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Indicate either <code>objectno</code> or <code>objectuid</code> .
ign_tripstart_timeout	int	Timeout before starting the trip automatically after the device detects the ignition is switched on, in seconds. Valid values are: 0, 30, 60, 120, 180, 240, 300 This parameter is optional.
ign_tripstop_timeout	int	Timeout before ending the trip automatically when the device detects standstill or is undocked. Valid values are: 0, 60, 120, 180, 240, 300, 600, 900, 1200, 1800, 2700, 3600 This parameter is optional.
standstill_timeout	int	Minimal standstill duration. Valid values are: 60, 120, 180, 240, 300, 600, 900, 1200, 1800, 2700, 3600 This parameter is optional.

getVehicleConfig

Description

Using `getVehicleConfig` you can retrieve LINK specific configuration settings for individual vehicles or all vehicles in the WEBFLEET account.

Technical details

SOAP endpoint address / function name `configurationAndSecurityService#getVehicleConfig`

Request limits	10 requests / minute
----------------	----------------------

Parameters

getVehicleConfig requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `getVehicleConfig`:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. This parameter is optional.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. This parameter is optional.

Result

Result for getVehicleConfig:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated.
ign_tripstart_timeout	int	Timeout before starting the trip automatically after the device detects the ignition is switched on, in seconds. Valid values are: 0, 30, 60, 120, 180, 240, 300
ign_tripstop_timeout	int	Timeout before ending the trip automatically when the device detects standstill or is undocked. Valid values are: 0, 60, 120, 180, 240, 300, 600, 900, 1200, 1800, 2700, 3600
standstill_timeout	int	Minimal standstill duration. Valid values are: 60, 120, 180, 240, 300, 600, 900, 1200, 1800, 2700, 3600

setStatusMessages

Description

setStatusMessages sets predefined text and order status messages for a specific object. These messages are visible as predefined messages on the driver terminal.

Setting predefined status messages for the WEBFLEET account can be done using [setAccountStatusMessages](#).

Technical details

SOAP endpoint address / function name configurationAndSecurityService#setStatusMessages

Request limits	50 request / 8 hours
----------------	----------------------

Parameters

setStatusMessages requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to **setStatusMessages**:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Indicate either <code>objectno</code> or <code>objectuid</code> .
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Indicate either <code>objectno</code> or <code>objectuid</code> .
resettoaccount	boolean	Valid values: <ul style="list-style-type: none">• 1 - The object specific status messages are reset to the account defaults and the status messages will be used from the WEBFLEET account• 0 - Status messages remain object specific. This parameter is optional.
ts_txt_1	string (60)	The text of the text status message on index 1, 2 ... 15.
ts_txt_2		These parameters are optional.
...		
ts_txt_15		
ts_el_1	nonNegativeInteger	The text of the event level on index 1, 2 ... 15.
ts_el_2		Valid values: <ul style="list-style-type: none">• 1 - Notice/Information• 2 - Warning• 3 - Alarm 1• 4 - Alarm 2• 5 - Alarm 3
...		
ts_el_15		
		These parameters are optional.
Note: If not specified, the status message is not associated with any event level.		
os_txt_1	string (60)	The order status message text on index 1, 2 ... 15.
os_txt_2		These parameters are optional.
...		
os_txt_15		

Parameter	Type	Description
os_el_1	nonNegativeInteger	The event level of the order status message on index 1, 2 ... 15.
os_el_2	nonNegativeInteger	Valid values: ... os_el_15
		<ul style="list-style-type: none"> • 1 - Notice/Information • 2 - Warning • 3 - Alarm 1 • 4 - Alarm 2 • 5 - Alarm 3
		These parameters are optional.
		Note: If not indicated the status message is not associated with any event level.

setAccountStatusMessages

Description

setAccountStatusMessages sets the predefined order and text status messages for a whole WEBFLEET account. For object specific configurations use [setStatusMessages](#).

Technical details

SOAP endpoint address / function name configurationAndSecurityService#setAccountStatusMessages

Request limits	1 request / 4 hours
----------------	---------------------

Parameters

setAccountStatusMessages requires the following common parameters:

- **Authentication parameters**
- **General parameters**

Parameters specific to setAccountStatusMessages:

Parameter	Type	Description
ts_txt_1	string (60)	The text of the text status message on index 1, 2 ... 15.
ts_txt_2		These parameters are optional.
...		
ts_txt_15		

Parameter	Type	Description
ts_el_1	nonNegativeInteger	The text of the event level on index 1, 2 ... 15.
ts_el_2	nonNegativeInteger	Possible values for event levels are:
...		
ts_el_15		<ul style="list-style-type: none"> • 1 - Notice/Information • 2 - Warning • 3 - Alarm 1 • 4 - Alarm 2 • 5 - Alarm 3 <p>These parameters are optional. If not indicated the status message is not associated with any event level.</p>
os_txt_1	string (60)	The order status message text on index 1, 2 ... 15.
os_txt_2		These parameters are optional.
...		
os_txt_15		
os_el_1	nonNegativeInteger	The event level of the order status message on index 1, 2 ... 15.
os_el_2	nonNegativeInteger	Possible values for event levels are:
...		
os_el_15		<ul style="list-style-type: none"> • 1 - Notice/Information • 2 - Warning • 3 - Alarm 1 • 4 - Alarm 2 • 5 - Alarm 3 <p>These parameters are optional. If not indicated the status message is not associated with any event level.</p>

User management

showUsers

Description

This actions returns a list of all existing users within the account along with the last recorded login time.

Technical details

SOAP endpoint address / function name userManagementService#showUsers

Request limits 10 requests / minute

Parameters

showUsers requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to showUsers:

Parameter	Type	Description
username_filter	string (max. 50 characters)	Filter used to match any user name in the account containing the indicated string, also as substring. This parameter is optional.
realname_filter	string (max. 50 characters)	Filter used to match any real name of a user in the account containing the indicated string, also as substring. This parameter is optional.
company_filter	string (max. 50 characters)	Filter used to match any company name in the account containing the indicated string, also as substring. This parameter is optional.

Result

Result for showUsers:

Parameter	Type	Description
username	string (50 characters)	
realname	string (50 characters)	The real name of a user
company	string (50 characters)	

Parameter	Type	Description
email	string (255)	The e-mail address of the user. This parameter is optional.
validfrom	dateTime	ISO 8601 -formatted date and time in the UTC timezone, combined representation in the extended format. Example: 2007-12-24T16:00:00+02:00 Empty if no start date is set.
validto	dateTime	ISO 8601 -formatted date and time in the UTC timezone, combined representation in the extended format. Example: 2007-12-24T16:00:00+02:00 Empty if no end date is set.
lastlogin	dateTime	ISO 8601 -formatted date and time in the UTC timezone, combined representation in the extended format. Example: 2007-12-24T16:00:00+02:00 Empty if no end date is set.
profile	string (50 characters)	The profile of the user. Valid values: <ul style="list-style-type: none">• guest_login_only• standard_login_only• guest• standard• expert• admin
profilename	string	The label used for the value of profile. Returned in the language of the request.
userinfo	string (4000 characters)	Additional information about the user.
passwordexpiration	dateTime	The expiration time of the password. ISO 8601 -formatted date and time in the UTC timezone, combined representation in the extended format. Example: 2007-12-24T16:00:00+02:00 Empty if the setting password expiration is disabled or no timestamp of the last password change exists.
userid	string (30)	A unique unchangeable identifier for the user which is automatically generated by WEBFLEET.

changePassword

Description

Using `changePassword` you can change the password of your own user account.

Technical details

SOAP endpoint address / function name `userManagementService#changePassword`

Request limits 10 requests / hour

Parameters

`changePassword` requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `changePassword`:

Parameter	Type	Description
oldpassword	string	The current password of your user account. This parameter is mandatory.
newpassword	string	The new password. This parameter is mandatory.

insertUser

Description

Using `insertUser` you can create a new WEBFLEET user within the current account.

Note: This action can only be executed by users that have the "Administrator" profile.

Technical details

SOAP endpoint address / function name `userManagementService#insertUser`

Request limits 10 requests / minute

Parameters

`insertUser` requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `insertUser`:

Parameter	Type	Description
new_username	string (50)	User name of the newly created user. This parameter is mandatory. It must be unique within the WEBFLEET account.
new_password	string (255)	The password of the newly created user. You can leave this empty to let WEBFLEET create a new random password. The generated password will be sent to the email address of the newly created user. This parameter is optional.
require_password_change	boolean	If this parameter is set to <code>true</code> , the new user is forced to change the password when they log on to WEBFLEET for the first time. This parameter affects the WEBFLEET user interface only, but not WEBFLEET.connect. Default is <code>true</code> . This parameter is optional.
realname	string (50)	The full name of the user. This parameter is mandatory.
info	string (500)	A descriptive text. This parameter is optional.
company	string (50)	The name of the company. This parameter is optional.
email	string (255)	The e-mail address of the user. This parameter is mandatory.
validfrom	datetime	Defines the start date of the validity of the user account. You can omit this parameter if not needed. Default is null. This parameter is optional.
validto	datetime	Defines the end date of the validity of the user account. You can omit this parameter if not needed. Default is null. This parameter is optional.

Parameters specific to insertUser

Parameter	Type	Description
profile	string (50)	<p>The profile of the user, see showUsers.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • guest_login_only • guest • standard_login_only • standard • expert • admin • invoices_user • report_recipient <p>This parameter is required.</p> <p>See below table for possible combinations with interfacestyle.</p>
interfacestyle	string (50)	<p>The interface style of the user which is used by the WEBFLEET user interface.</p> <p>The default value is "standard".</p> <p>Valid values are:</p> <ul style="list-style-type: none"> • standard • bigmap • invoices • reportrecipient <p>This parameter is optional.</p> <p>See below table for possible combinations with profile.</p>

Parameters specific to insertUser

Profile and interface style

The following combinations of profile and interfacestyle are possible:

	standard	bigmap	invoices	reportrecipient
guest_login_only	x			
guest	x			
standard_login_only	x	x		
standard	x			
expert	x			
admin	x			
invoices_user			x	
report_recipient				x

updateUser

Description

Using `updateUser` you can update the details of a WEBFLEET user within the current account.

Note: This action can only be executed by users that have the "Administrator" profile.

Technical details

SOAP endpoint address / function name `userManagementService#updateUser`

Request limits	10 requests / minute
----------------	----------------------

Parameters

`updateUser` requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `updateUser`:

Parameter	Type	Description
target_userid	string (30)	A unique, unchangeable identifier for the user, automatically generated by WEBFLEET. The <code>userid</code> is returned by showUsers . It is mandatory to specify <code>target_userid</code> and/or <code>target_username</code> .
target_username	string (50)	User name of the user. It is mandatory to specify <code>target_userid</code> and/or <code>target_username</code> .
new_username	string (50)	User name of the newly created user. It is required only if the user name shall be changed. This parameter is optional.
new_password	string (255)	Defines a new password for the user. You can omit this parameter to not change the password. This parameter is optional.
generate_password	boolean	Generates a password for the user. If set to <code>true</code> a new random password will be generated by WEBFLEET. The password will be sent to the email address of the user. Omit this parameter to not change the password. This parameter is optional.
require_password_change	boolean	If this parameter is set to <code>true</code> , the user is forced to change the password when they log on to WEBFLEET for the first time. This parameter affects the WEBFLEET user interface only, but not WEBFLEET.connect. This parameter is optional.

Parameter	Type	Description
realname	string (50)	The full name of the user. This parameter is optional.
info	string (500)	A descriptive text. This parameter is optional.
company	string (50)	The name of the company. This parameter is optional.
email	string (255)	The e-mail address of the user. This parameter is optional.
validfrom	datetime	Defines the start date of the validity of the user account. You can omit this parameter if not needed. Default is null. This parameter is optional.
validto	datetime	Defines the end date of the validity of the user account. You can omit this parameter if not needed. Default is null. This parameter is optional.
profile	string (50)	The profile of the user, see showUsers . Valid values: <ul style="list-style-type: none"> • guest_login_only • guest • standard_login_only • standard • expert • admin • invoices_user • report_recipient This parameter is optional. See table for possible combinations with <code>interfacestyle</code> , insertUser .
interfacestyle	string (50)	The interface style of the user which is used by the WEBFLEET user interface. The default value is "standard". Valid values are: <ul style="list-style-type: none"> • standard • bigmap • invoices • reportrecipient This parameter is optional. See table for possible combinations with <code>profile</code> , insertUser .

deleteUser

Description

Using `deleteUser` you can delete a WEBFLEET user within the current account.

Note: This action can only be executed by users that have the "Administrator" profile.

Technical details

SOAP endpoint address / function name `userManagementService#deleteUser`

Request limits	10 requests / minute
----------------	----------------------

Parameters

deleteUser requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `deleteUser`:

Parameter	Type	Description
<code>target_username</code>	string (50)	User name of the user. It is mandatory to specify <code>target_userid</code> or <code>target_username</code> .
<code>target_userid</code>	string (30)	A unique, unchangeable identifier for the user, automatically generated by WEBFLEET. The <code>userid</code> is returned by showUsers . It is mandatory to specify <code>target_userid</code> or <code>target_username</code> .

getUserRights

Description

This action returns the currently configured access right levels for a specified user. The result contains profile default rights and individually configured rights.

Note: This action can only be executed by users that have the "Administrator" profile.

Technical details

SOAP endpoint address / function name `userManagementService#getUserRights`

Request limits	10 requests / minute
----------------	----------------------

Parameters

getUserRights requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to getUserRights:

Parameter	Type	Description
target_username	string (50)	User name of the user. It is mandatory to indicate target_userid and/or target_username.
target_userid	string (30)	A unique, unchangeable identifier for the user, automatically generated by WEBFLEET. The userid is returned by showUsers . It is mandatory to specify target_userid and/or target_username.

Result

Result for getUserRights:

Parameter	Type	Description
rightlevel	string	The name of the right level, see List of supported right levels .
entityuid	string	The UID of an entity the right applies to. Can be empty for global rights.
entitytype	string	The type of entity the right applies to. Valid values: <ul style="list-style-type: none"> • object • objectgroup • driver • drivergroup • address • addressgroup

setUserRight

Description

This action adds a right level to an individual user. Right levels can only be changed for users with the standard or bigmap interface style (interfacestyle). For users with the bigmap interface style only the right levels address_read_access and object_tracking can be set/removed in combination with an entityuid.

Note: This action can only be executed by users that have the "Administrator" profile.

Technical details

SOAP endpoint address / function name userManagementService#setUserRight

Request limits	10 requests / minute
----------------	----------------------

Parameters

setUserRight requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to setUserRight:

Parameter	Type	Description
target_username	string (50)	User name of the user. It is mandatory to specify <code>target_userid</code> and/or <code>target_username</code> .
target_userid	string (30)	A unique, unchangeable identifier for the user, automatically generated by WEBFLEET. The <code>userid</code> is returned by showUsers . It is mandatory to specify <code>target_userid</code> and/or <code>target_username</code> .
rightlevel	string	The name of the right level, see List of supported right levels .
entityuid	string	The UID of the entity the right applies to. Note: You can only assign right levels to entities when they are supported by the <code>entitytype</code> of the indicated <code>entityuid</code> . For example, you cannot assign the right level <code>object_full_access</code> to an entity of the entity type <code>driver</code> . Omit this parameter for global rights.

resetUserRights

Description

Using `resetUserRights` you can reset the user access right levels to the profile defaults. All individual configured rights will be lost after executing this function.

Note: This action can only be executed by users that have the "Administrator" profile.

Technical details

SOAP endpoint address / function name `userManagementService#resetUserRights`

Request limits	10 requests / minute
----------------	----------------------

Parameters

resetUserRights requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to resetUserRights:

Parameter	Type	Description
target_username	string (50)	User name of the user. It is mandatory to specify target_userid and/or target_username.
target_userid	string (30)	A unique, unchangeable identifier for the user, automatically generated by WEBFLEET. The userid is returned by showUsers . It is mandatory to specify target_userid and/or target_username.

removeUserRight

Description

This action removes a right level from an individual user. Right levels can only be removed from users with the standard or bigmap interface style (interfacestyle). For users with the bigmap interface style only the right levels address_read_access and object_tracking can be removed in combination with an entityuid.

Note: This action can only be executed by users that have the "Administrator" profile.

Technical details

SOAP endpoint address / function name userManagementService#removeUserRight

Request limits	10 requests / minute
----------------	----------------------

Parameters

removeUserRight requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to removeUserRight:

Parameter	Type	Description
target_username	string (50)	User name of the user. It is mandatory to specify target_userid and/or target_username.
target_userid	string (30)	A unique, unchangeable identifier for the user, automatically generated by WEBFLEET. The userid is returned by showUsers . It is mandatory to specify target_userid and/or target_username.

Parameter	Type	Description
rightlevel	string	The name of the right level, see List of supported right levels .
entityuid	string	The UID of the entity the right applies to. Note: You can only remove right levels from entities when they are supported by the <code>entitytype</code> of the indicated <code>entityuid</code> . For example, you cannot remove the right level <code>object_full_access</code> from an entity of the entity type <code>driver</code> .
Omit this parameter for global rights.		

Supported right levels

List of supported right levels

Some of the right levels can be set only on global basis as where other right levels can be set on individual basis, per entity, or on a global basis. In this context, "entity" means a vehicle, address, or driver (or associated group). If a right level is set to global, all associated entities are affected.

List of supported right levels

Parameter	Basis	Description
external_access	Global	Allowed to access WEBFLEET.connect API.
full_access_accountsettings	Global	Allowed to change account settings.
edit_usersettings	Global	User can change own settings.
change_password	Global	User can change his own password.
trip_data_access	Global	Access to trip related data.
areas_full_access	Global	Read/Write access to areas.
areas_read_access	Global	Read access to areas.
orders_full_access	Global	Full access to order management functions.
orders_read_access	Global	Read access to orders.
external_tachograph_interface	Global	Access to the tachograph page
object_full_access	Entity Global	Full read/write access to vehicles, messaging, tracking, change group association etc.
object_expert_access	Entity Global	Full read/write access to vehicles, messaging, tracking
object_standard_access	Entity Global	Read access to vehicles, messaging, tracking

Parameter	Basis	Description
object_tracking	Entity Global	Read access to vehicles, tracking, read messages
object_locating	Entity Global	Read access to vehicles, view position
object_locating_and.messaging	Entity Global	Read access to vehicles, view position, messaging
object_locating_and_communication	Entity Global	Read access to vehicles, view position, messaging
object.messaging	Entity Global	Read access to vehicles, messaging, no position info
object_read_access	Entity Global	Read access to vehicles, view position
address_admin_access	Entity Global	Full edit access to addresses including address group assignments
address_edit_access	Entity Global	Edit access to addresses
address_read_access	Entity Global	Read access to addresses
driver_admin_access	Entity Global	Full edit access to drivers, including driver group assignments
driver_edit_access	Entity Global	Edit access to drivers
driver_read_access	Entity Global	Read access to drivers
enable_device_configuration_management	Global	Allows to manage configurations for mobile devices. This right level is only available for specific users.
report_read_access	Global	Grants read access to reports.
report_edit_access	Global	Allows to edit and create reports. Only available when the right level report_read_access is set.

Vehicle Maintenance

insertMaintenanceSchedule

Description

This action creates a new maintenance schedule and task for a specific object. When you have created a new maintenance schedule, an ID for it will be returned.

Technical details

SOAP endpoint address / function name vehicleMaintenanceService#insertMaintenanceSchedule

Request limits 10 requests / minute

Parameters

insertMaintenanceSchedule requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to insertMaintenanceSchedule:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .
schedulename	string (100)	The name of the maintenance schedule. This parameter is required.
scheduledescription	string (2000)	Description of the maintenance schedule. This parameter is optional.

Parameter	Type	Description
scheduletype	nonNegativeInteger	<p>Indicates the icon for the specific maintenance schedule shown in WEBFLEET.</p> <p>This parameter is required.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 0 - Renew Oil • 1 - Change tires • 2 - Check engine • 3 - General • 4 - License • 5 - Brake disc • 6 - Gas • 7 - Lights • 8 - Air condition • 9 - Battery • 10 - Inspection • 11 - Car lift • 12 - Steering wheel • 13 - Key • 14 - Air bag • 15 - Car jack • 16 - Gears • 17 - Water • 18 - Voltage • 19 - ABS • 20 - Heater • 21 - Handbrake • 22 - Parking • 23 - Temperature • 24 - Wiper • 25 - Diagnostic trouble code • 26 - CAN warning

Parameter	Type	Description
ruletype	nonNegativeInteger	<p>Describes the rules if and how a maintenance task shall be repeated.</p> <p>This parameter is required.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 0 - Single shot - Task will not be repeated. • 1 - Continuous fixed interval - Task will be repeated in a fixed interval that was reported at the end of the previous task, independent from mileage or time when the task was carried out. • 2 - Continuous sequential interval - Task will be repeated in an interval depending on the state of the last completed task. <hr/> <p><i>Example: A Task will be repeated after 2000 km driving after the previous maintenance task has ended.</i></p> <hr/>
intervaltime	nonNegativeInteger	<p>Indicates the interval in months.</p> <p>Valid values: 1 ... 120</p> <p>This parameter is required if <code>intervalodometer</code> is missing and <code>ruletype</code> is 1 or 2.</p>
intervalodometer	nonNegativeInteger	<p>Indicates the interval in meters.</p> <p>Valid values: 1 ... 1,000,000,000</p> <p>This parameter is required if <code>intervaltime</code> is missing and <code>ruletype</code> is 1 or 2.</p>
remindingtime	nonNegativeInteger	<p>Indicates the time a reminder shall show up in WEBFLEET previous to the due date, in days.</p> <p>Valid values: 1 ... 180</p> <p>This parameter is optional.</p>
remindingodometer	nonNegativeInteger	<p>Indicates the mileage a reminder shall show up in WEBFLEET previous to the mileage when the task is due, in meters.</p> <p>Valid values: 1 ... 100,000,000</p> <p>This parameter is optional.</p>
plannedexecetime	date	<p>Indicates the next due date of the maintenance work.</p> <p>This parameter is required if <code>plannedexecodometer</code> is missing.</p>
plannedexecodometer	nonNegativeInteger	<p>Indicates the mileage after which the maintenance is due, in meters.</p> <p>Valid values: 1 ... 10,000,000,000</p> <p>This parameter is required if <code>plannedexecetime</code> is missing.</p>
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated.</p> <p>Can be used alternatively to <code>objectno</code>.</p>

Parameter	Type	Description
intervaltype	nonNegativeInteger	<p>The type of time interval.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 0 - days • 1 - weeks • 2 - months • 3 - years

Result

Result for insertMaintenanceSchedule:

Parameter	Type	Description
scheduleid	nonNegativeInteger	Maintenance schedule specific identifier. Unique within an account.

updateMaintenanceSchedule

Description

This action updates an existing maintenance schedule by using `scheduleid`.

When using `updateMaintenanceSchedule`, you only need to include the parameters for which you want to change or delete the values. If you include a parameter and do not indicate a value, the existing value will be deleted.

To delete a numeric value in SOAP use the `setNull` member.

Technical details

SOAP endpoint address / function name `vehicleMaintenanceService#updateMaintenanceSchedule`

Request limits	10 requests / minute
----------------	----------------------

Parameters

`updateMaintenanceSchedule` requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `updateMaintenanceSchedule`:

Parameter	Type	Description
scheduleid	nonNegativeInteger	<p>Maintenance schedule specific identifier.</p> <p>Unique within an account.</p> <p>This parameter is required.</p>

Parameter	Type	Description
schedulename	string (100)	The name of the maintenance schedule. This parameter is optional.
scheduledescription	string (2000)	Description of the maintenance schedule. This parameter is optional.
scheduletype	nonNegativeInteger	Indicates the icon for the specific maintenance schedule shown in WEBFLEET. This parameter is optional. Valid values: <ul style="list-style-type: none"> • 0 - Renew Oil • 1 - Change tires • 2 - Check engine • 3 - General • 4 - License • 5 - Brake disc • 6 - Gas • 7 - Lights • 8 - Air condition • 9 - Battery • 10 - Inspection • 11 - Car lift • 12 - Steering wheel • 13 - Key • 14 - Air bag • 15 - Car jack • 16 - Gears • 17 - Water • 18 - Voltage • 19 - ABS • 20 - Heater • 21 - Handbrake • 22 - Parking • 23 - Temperature • 24 - Wiper • 25 - Diagnostic trouble code • 26 - CAN warning

Parameter	Type	Description
ruletype	nonNegativeInteger	<p>Describes the rules if and how a maintenance task shall be repeated.</p> <p>This parameter is optional.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 0 - Single shot - Task will not be repeated. • 1 - Continuous fixed interval - Task will be repeated in a fixed interval that was reported at the end of the previous task, independant from mileage or time when the task was carried out. • 2 - Continuous sequential interval - Task will be repeated in an interval depending on the state of the last completed task. <hr/> <p><i>Example: Task will be repeated after 2000 km driving after the previous maintenance task has ended.</i></p> <hr/>
intervaltime	nonNegativeInteger	<p>Indicates the interval in months.</p> <p>Valid values: 1 ... 120</p> <p>This parameter is optional.</p> <p>You can only delete the value of the parameter when there is a valid value for intervalodometer.</p>
intervalodometer	nonNegativeInteger	<p>Indicates the interval in meters.</p> <p>Valid values: 1 ... 1,000,000,000</p> <p>You can only delete the value of the parameter when there is a valid value for intervaltime.</p>
remindingtime	nonNegativeInteger	<p>Indicates the time a reminder shall show up in WEBFLEET previous to the due date, in days.</p> <p>Valid values: 1 ... 180</p> <p>This parameter is optional.</p>
remindingodometer	nonNegativeInteger	<p>Indicates the mileage a reminder shall show up in WEBFLEET previous to the mileage when the task is due, in meters.</p> <p>Valid values: 1 ... 100,000,000</p> <p>This parameter is optional.</p>
plannedexecutetime	date	<p>Indicates the next due date of the maintenance work.</p> <p>This parameter is optional.</p> <p>You can only delete the value of the parameter when there is a valid value for plannedexecodometer.</p> <p>Note: The parameter must include a time as well as the date.</p>

Parameter	Type	Description
plannedexecodometer	nonNegativeInteger	<p>Indicates the mileage after which the maintenance is due, in meters.</p> <p>Valid values: 1 ... 10,000,000,000</p> <p>This parameter is optional.</p> <p>You can only delete the value of the parameter when there is a valid value for <code>plannedexecetime</code>.</p>
intervaltimetype	nonNegativeInteger	<p>The type of time interval.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 0 - days • 1 - weeks • 2 - months • 3 - years

deleteMaintenanceSchedule

Description

This action deletes an existing maintenance schedule and all related tasks. Tasks that have already been read or completed are not being deleted.

Technical details

SOAP endpoint address / function name vehicleMaintenanceService#deleteMaintenanceSchedule

Request limits	10 requests / minute
----------------	----------------------

Parameters

deleteMaintenanceSchedule requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `deleteMaintenanceSchedule`:

Parameter	Type	Description
scheduleid	nonNegativeInteger	<p>Maintenance schedule specific identifier. Unique within an account.</p> <p>This parameter is required.</p>

showMaintenanceSchedules

Description

This action retrieves a list of maintenance schedules.

Technical details

SOAP endpoint address / function name vehicleMaintenanceService#showMaintenanceSchedules

Request limits	10 requests / minute
----------------	----------------------

Parameters

showMaintenanceSchedules requires the following common parameters:

- **Authentication parameters**
- **General parameters**

Parameters specific to showMaintenanceSchedules:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. This parameter is optional.
objectgroupname	string	Case-sensitive. This parameter is optional.
scheduleid	nonNegativeInteger	Maintenance schedule specific identifier. Unique within an account. This parameter is optional.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .

Result

Result for showMaintenanceSchedules:

Parameter	Type	Description
scheduleid	nonNegativeInteger	Maintenance schedule specific identifier. Unique within an account.
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
schedulename	string (100)	The name of the maintenance schedule.
scheduledescription	string (2000)	Description of the maintenance schedule.

Parameter	Type	Description
scheduletype	nonNegativeInteger	<p>Indicates the icon for the specific maintenance schedule shown in WEBFLEET.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 0 - Renew Oil • 1 - Change tires • 2 - Check engine • 3 - General • 4 - License • 5 - Brake disc • 6 - Gas • 7 - Lights • 8 - Air condition • 9 - Battery • 10 - Inspection • 11 - Car lift • 12 - Steering wheel • 13 - Key • 14 - Air bag • 15 - Car jack • 16 - Gears • 17 - Water • 18 - Voltage • 19 - ABS • 20 - Heater • 21 - Handbrake • 22 - Parking • 23 - Temperature • 24 - Wiper • 25 - Diagnostic trouble code • 26 - CAN warning
ruletype	nonNegativeInteger	<p>Describes the rules if and how a maintenance task shall be repeated.</p> <p>This parameter is required.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 0 - Single shot - Task will not be repeated. • 1 - Continuous fixed interval - Task will be repeated in a fixed interval that was reported at the end of the previous task, independant from mileage or time when the task was carried out. • 2 - Continuous sequential interval - Task will be repeated in an interval depending on the state of the last completed task.

Example: Task will be repeated after 2000 km driving after the previous maintenance task has ended.

Parameter	Type	Description
intervaltime	nonNegativeInteger	Indicates the interval in months.
intervalodometer	nonNegativeInteger	Indicates the interval in meters.
remindingtime	nonNegativeInteger	Indicates the time a reminder shall show up in WEBFLEET previous to the due date, in days.
remindingodometer	nonNegativeInteger	Indicates the mileage a reminder shall show up in WEBFLEET previous to the mileage when the task is due, in meters.
plannedexecutetime	date	Indicates the next due date of the maintenance work.
plannedexecodometer	nonNegativeInteger	Indicates the mileage after which the maintenance is due, in meters.
firstexecutetime	date	Indicates the date when the maintenance task was carried out first.
firstexecodometer	nonNegativeInteger	Indicates the mileage at which the maintenance task was carried out first, in meters.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .
creationtype	int	Describes how the maintenance schedule was created. Possible values are: <ul style="list-style-type: none">• 0 - manually by user• 1 - automatically by vehicle diagnostic system
intervaltimetype	nonNegativeInteger	The type of time interval. Valid values: <ul style="list-style-type: none">• 0 - days• 1 - weeks• 2 - months• 3 - years

showMaintenanceTasks

Description

This action retrieves a list of maintenance tasks.

Technical details

SOAP endpoint address / function name vehicleMaintenanceService#showMaintenanceTasks

Request limits	10 requests / minute
----------------	----------------------

Parameters

showMaintenanceTasks requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

showMaintenanceTasks requires the following other parameters:

- [Date range filter parameters](#)

The date range applies to:

- plannedexecutetime if status has the value 0 or is not set.
- readtime if status has the value 1 or is not set.
- completedtime if status has the value 2 or is not set.

Parameters specific to showMaintenanceTasks:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. This parameter is optional.
objectgroupname	string	Case-sensitive. This parameter is optional.
scheduleid	nonNegativeInteger	Maintenance schedule specific identifier. Unique within an account. This parameter is optional.
taskid	nonNegativeInteger	Maintenance task specific identifier. Unique within an account. This parameter is optional.
status	nonNegativeInteger	Status of the task. Valid values: <ul style="list-style-type: none">• 0 - new• 1 - read• 2 - completed This parameter is optional.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to objectno.

Parameter	Type	Description
duetype	int	<p>Filter for tasks that are overdue or tasks with a exceeded reminder.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 0 - no filter • 1 - tasks with exceeded reminder • 2 - tasks that are overdue <p>This parameter is optional.</p>
scheduetype	Integer	<p>Indicates the icon for the specific maintenance schedule shown in WEBFLEET.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 0 - Renew Oil • 1 - Change tires • 2 - Check engine • 3 - General • 4 - License • 5 - Brake disc • 6 - Gas • 7 - Lights • 8 - Air condition • 9 - Battery • 10 - Inspection • 11 - Car lift • 12 - Steering wheel • 13 - Key • 14 - Air bag • 15 - Car jack • 16 - Gears • 17 - Water • 18 - Voltage • 19 - ABS • 20 - Heater • 21 - Handbrake • 22 - Parking • 23 - Temperature • 24 - Wiper • 25 - Diagnostic trouble code • 26 - CAN warning

Result

Result for showMaintenanceTasks:

Parameter	Type	Description
taskid	nonNegativeInteger	Maintenance task specific identifier. Unique within an account.
scheduleid	nonNegativeInteger	Maintenance schedule specific identifier. Unique within an account.
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
plannedexecetime	date	Indicates the next due date of the maintenance work.
plannedexecodometer	nonNegativeInteger	Indicates the mileage after which the maintenance is due, in meters.
remindingtime	date	Indicates the date a reminder shall show up in WEBFLEET previous to the due date.
remindingodometer	nonNegativeInteger	Indicates the mileage a reminder shall show up in WEBFLEET previous to the mileage when the task is due, in meters.
readusername	string	Username of who read the maintenance task.
readtime	date	Time when the maintenance task was read.
readodometer	nonNegativeInteger	Vehicle mileage when the maintenance task was read, in meters.
completedusername	string	Username of who completed the maintenance task.
completedtime	date	Time when the maintenance task was completed.
completedodometer	nonNegativeInteger	Vehicle mileage when the maintenance task was completed, in meters.
status	nonNegativeInteger	Status of the task. Valid values: <ul style="list-style-type: none">• 0 - new• 1 - read• 2 - completed
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to objectno.
schedulename	string(100)	The name of the maintenance schedule.

Parameter	Type	Description
scheduletype	nonNegativeInteger	<p>Indicates the icon for the specific maintenance schedule shown in WEBFLEET.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 0 - Renew Oil • 1 - Change tires • 2 - Check engine • 3 - General • 4 - License • 5 - Brake disc • 6 - Gas • 7 - Lights • 8 - Air condition • 9 - Battery • 10 - Inspection • 11 - Car lift • 12 - Steering wheel • 13 - Key • 14 - Air bag • 15 - Car jack • 16 - Gears • 17 - Water • 18 - Voltage • 19 - ABS • 20 - Heater • 21 - Handbrake • 22 - Parking • 23 - Temperature • 24 - Wiper
schedulecreationtype	int	<p>Describes how the maintenance schedule was created.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 0 - manually by user • 1 - automatically by vehicle diagnostic system

resolveMaintenanceTask

Description

This action resolves a maintenance task depending on the specified status.

Technical details

SOAP endpoint address / function name vehicleMaintenanceService#resolveMaintenanceTask

Request limits	10 requests / minute
----------------	----------------------

Parameters

resolveMaintenanceTask requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to resolveMaintenanceTask:

Parameter	Type	Description
taskid	nonNegativeInteger	Maintenance task specific identifier. Unique within an account. This parameter is required.
status	nonNegativeInteger	Status of the task. Valid values: <ul style="list-style-type: none">• 1 - read• 2 - completed This parameter is required.

Reporting

getArchivedReportList

Description

getArchivedReportList lists information about the reports stored in the WEBFLEET Reports Archive of a specific user. It returns meta information of the reports such as ID, name, file size, creation time, etc.

It does not fetch the report data (PDF or CSV). Use [getArchivedReport](#) to retrieve the actual PDF or CSV files.

Technical details

SOAP endpoint address / function name reportingService#getArchivedReportList

Request limits	10 requests / minute
----------------	----------------------

Parameters

getArchivedReportList requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)
- [Date range filter parameters](#)

Result

Result for getArchivedReportList:

Parameter	Type	Description
reportid	nonNegativeInteger	Identifying number of the report file.
reportname	string (500)	Display name of the report file.
format	string	Name of the file format. Valid values: <ul style="list-style-type: none">• pdf• csv
creationtime	dateTime	Date and time, the report file has been created.
expirytime	dateTime	Date and time of when the report will be deleted automatically.
size	nonNegativeInteger	The file size of the report file, in kB.

getArchivedReport

Description

Using `getArchivedReport` you can retrieve a PDF or CSV report that is stored in the WEBFLEET Reports Archive of a specific user.

Technical details

SOAP endpoint address / function name `reportingService#getArchivedReport`

Request limits	10 requests / minute
----------------	----------------------

Parameters

`getArchivedReport` requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `getArchivedReport`:

Parameter	Type	Description
reportid	nonNegativeInteger	Identifying number of the report file as returned by getArchiveReportList . This parameter is mandatory.

deleteArchivedReport

Description

Using `deleteArchivedReport` you can delete an archived report file from the WEBFLEET Reports Archive of a specific user.

Technical details

SOAP endpoint address / function name `reportingService#deleteArchivedReport`

Request limits	10 requests / minute
----------------	----------------------

Parameters

`deleteArchivedReport` requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `deleteArchivedReport`:

Parameter	Type	Description
reportid	nonNegativeInteger	Identifying number of the report file as returned by getArchiveReportList . This parameter is required.

getReportList

Description

getReportList returns a list of reports, that can be created on demand and that are assigned to the current WEBFLEET user. Reports can be created on demand using `sendReportViaMail` or `createReport`.

Technical details

SOAP endpoint address / function name reportingService#getReportList

Request limits	10 requests / minute
----------------	----------------------

Parameters

getReportList requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to getReportList:

Parameter	Type	Description
reporttype	string (100)	A type that helps to filter for the report names to be returned. Each report can be associated to several types of reports. This parameter is optional. Omit this parameter to retrieve the complete list of available reports.

Result

Result for getReportList:

Parameter	Type	Description
reportname	string (500)	Display name of the report file.
reporttypes	string	Comma-separated list of report types the report is associated with.

createReport

Description

Using `createReport` you can create a new PDF or CSV report on demand.

Technical details

SOAP endpoint address / function name reportingService#createReport

Request limits 5 requests / 10 minutes

Note: The returned CSV file uses a different style than returned by other WEBFLEET.connect actions. This is because the reports are not created by WEBFLEET.connect but by the WEBFLEET user interface.

Parameters

createReport requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)
- [Date range filter parameters](#), the maximum period length is 12 months.

Parameters specific to createReport:

Parameter	Type	Description
reportname	string (500)	Display name of the report file. This parameter is required.
format	string	Name of the file format. Valid values: <ul style="list-style-type: none">• pdf• csv Defaults to pdf if not specified.
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to objectuid. This parameter is optional.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to objectno. This parameter is optional.
objectgroupname	string	A name of an object group. This parameter is optional.
driverno	string	Identifying number of a driver. Unique within an account. This parameter is optional.
drivergroupname	string	Name of the group of drivers the driver is assigned to, case-sensitive. This parameter is optional.

Parameter	Type	Description
orderno	string (20)	Account-unique order id, case-sensitive. This parameter is optional.

sendReportViaMail

Description

Using `sendReportViaMail` you can create a new PDF or CSV report on demand and send it to an indicated email address.

Technical details

SOAP endpoint address / function name `reportingService#sendReportViaMail`

Request limits	5 requests / 10 minutes
----------------	-------------------------

Parameters

`sendReportViaMail` requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)
- [Date range filter parameters](#), the maximum period length is 12 months.

Parameters specific to `sendReportViaMail`:

Parameter	Type	Description
reportname	string (500)	Display name of the report file. This parameter is mandatory.
format	string	Name of the file format. Valid values: <ul style="list-style-type: none"> • <code>pdf</code> • <code>csv</code> Defaults to <code>pdf</code> if not indicated.
email	string	The email address to which the created report will be sent. This parameter is required.
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> . This parameter is optional.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> . This parameter is optional.

Parameter	Type	Description
objectgroupname	string	A name of an object group. This parameter is optional.
driverno	string	Identifying number of a driver. Unique within an account. This parameter is optional.
drivergroupname	string	Name of the group of drivers the driver is assigned to, case-sensitive. This parameter is optional.
orderno	string (20)	Account-unique order id, case-sensitive. This parameter is optional.

Areas

getAreas

Description

This actions returns a list of all areas that are currently configured within the account.

Technical details

SOAP endpoint address / function name areaService#getAreas

Request limits 10 requests / minute

Parameters

getAreas requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to getAreas

Parameter	Type	Description
areano	string (50)	<p>Identification number of an area. Unique within an account, case-sensitive.</p> <p>Note: Indicate either areano or areauid; do not use both parameters in combination.</p>
areauid	string (30)	<p>A unique, unchangeable identifier for the area, automatically generated by WEBFLEET.</p> <p>Note: Indicate either areano or areauid; do not use both parameters in combination.</p>
active	boolean	<p>Indicator for whether an area is enabled. Valid values:</p> <ul style="list-style-type: none">• 0 —area disabled• 1 —area enabled <p>Omit this parameter to retrieve all areas. This parameter is optional.</p>

Result

Result for getAreas:

Parameter	Type	Description
areano	string (50)	Identification number of an area. Unique within an account, case-sensitive.
areauid	string (30)	A unique, unchangeable identifier for the area, automatically generated by WEBFLEET.
areaname	string (254)	Display name of the area.
type	int	Classifies the geometric shape of this area. Valid values: <ul style="list-style-type: none">• 1 - rectangle• 2 - circle• 3 - polygon• 4 - corridor
active	boolean	Indicator for whether an area is enabled. Valid values are: <ul style="list-style-type: none">• 0 - area disabled• 1 - area enabled
validfrom	date	Start date of a period to limit the validity of the area.
validto	date	End date of a period to limit the validity of the area.
notificationmode	int	Describes the type of activity for which events shall be created. Valid values are: <ul style="list-style-type: none">• 0 - inside/outside• 1 - enter/leave
Note: If the area is configured as "inside/outside", recurrent events will be created as long as the vehicle is located inside/outside the area. If the area is configured as "enter/leave", only a single event will be created when the vehicle passes the border of the area.		
eventlevel_inside	int	Notification level (urgency) of the created event, when the vehicle is located inside of the area. Valid values: <ul style="list-style-type: none">• <empty> - No message• 1 - Notice• 2 - Warning• 3 - Alarm 1• 4 - Alarm 2• 5 - Alarm 3 Value is only set if notificationmode = 0.

Parameter	Type	Description
eventlevel_outside	int	<p>Notification level (urgency) of the created event, when the vehicle is located outside of the area.</p> <p>For valid values refer to the list for <code>eventlevel_inside</code>.</p> <p>Value is only set if <code>notificationmode</code> = 0.</p>
eventlevel_enter	int	<p>Notification level (urgency) of the created event, when the vehicle enters the area.</p> <p>For valid values refer to the list for <code>eventlevel_inside</code>.</p> <p>Value is only set if <code>notificationmode</code> = 1.</p>
eventlevel_leave	int	<p>Notification level (urgency) of the created event, when the vehicle leaves the area.</p> <p>For valid values refer to the list for <code>eventlevel_inside</code>.</p> <p>Value is only set if <code>notificationmode</code> = 1.</p>
latitude	int	<p>Geographic latitude of the geometric centre of the shape. Only set if area is a circle or rectangle. For polygon and corridor, please use getAreaPoints to retrieve a list of all coordinates.</p> <p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
longitude	int	See description for <code>latitude</code> for analogue use for longitude.
radius	int	Radius of the area in meters. Only set if the area is a circle.
width	int	Width of the area in meters. Only set if area is a rectangle or corridor.
height	int	Height of the area in meters. Only set if area is a rectangle.
pointcount	int	The number of points of the area. Only set if area is a polygon or corridor.
color	string (6)	The color of the area as a 6-digit hex RGB-color code.

insertArea

Description

`insertArea` creates a new geographic area.

Technical details

SOAP endpoint address / function name `areaService#insertArea`

Request limits	10 requests / minute
----------------	----------------------

Parameters


insertArea requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to insertArea:

Parameter	Type	Description
areano	string (50)	Identification number of an area. Unique within an account, case-sensitive. This parameter is required.
areaname	string (254)	Display name of the area. This parameter is required.
type	int	Classifies the geometric shape of this area. Valid values: <ul style="list-style-type: none">• 1 – rectangle• 2 – circle• 3 – polygon• 4 – corridor This parameter is required.
active	boolean	Indicator for whether an area is enabled. Valid values: <ul style="list-style-type: none">• 0 – area disabled• 1 – area enabled Default value is 1. This parameter is optional.
validfrom	date	Start date of a period to limit the validity of the area. This parameter is optional.
validto	date	End date of a period to limit the validity of the area. This parameter is optional.
notificationmode	int	Describes the type of activity for which events shall be created. The value defaults to 1 (enter/leave). When the vehicle passes the border of area one event is created. This parameter is optional.

Parameter	Type	Description
eventlevel_enter	int	<p>Notification level (urgency) of the created event, when the vehicle enters the area.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • <empty> – No message • 1 – Notice • 2 – Warning • 3 – Alarm 1 • 4 – Alarm 2 • 5 – Alarm 3 <p>Value is only set if notificationmode = 1.</p> <p>Default value is <empty>.</p> <p>This parameter is optional.</p>
eventlevel_leave	int	<p>Notification level (urgency) of the created event, when the vehicle leaves the area.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • <empty> – No message • 1 – Notice • 2 – Warning • 3 – Alarm 1 • 4 – Alarm 2 • 5 – Alarm 3 <p>Value is only set if notificationmode = 1.</p> <p>Default value is <empty>.</p> <p>This parameter is optional.</p>
latitude	int	<p>Geographic latitude of the geometric centre of the shape (rectangle or circle).</p> <p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p> <p>Mandatory for rectangle and circle.</p> <p>For polygon and corridor, please use the parameter point multiple times to submit each point of the complex shape.</p>
longitude	int	See description for latitude for analogue use for longitude.
radius	int	<p>Radius of the area in meters. Only set if the area is a circle.</p> <p>This parameter is mandatory for circle.</p>
width	int	<p>Width of the area in meters. Only set if area is a rectangle or corridor.</p> <p>This parameter is mandatory for rectangle and corridor.</p>

Parameter	Type	Description
height	int	Height of the area in meters. Only set if area is a rectangle. This parameter is mandatory for rectangle.
point	string	Comma-separated latitude/longitude pair, which describes a single point of the polygon or corridor (in WGS84 notation). <code><latitude>,<longitude></code> Repeat this parameter for each point in the shape.
		Note: Use HTTP-POST if the generated request URL is longer than 2000 characters.
		This parameter is mandatory for polygon and corridor.
color	string (6)	The color of the area as a 6-digit hex RGB-color code. This parameter is optional. The default value is 3366FF. The following colors are available within the WEBFLEET GUI: 
		The color codes for these colors are: 990000, CC0000, FF0000, FF6666, FF9999, FFCC- CC, DD6633, FF6600, FF9900, FFCC00, FFFF00, FFFF99, 006600, 009900, 00CC00, 00FF00, 99FF66, CCFF99, 006666, 009988, 00AA99, 00CCAA, 00DDCC, 00FFEE, 0000CC, 0033FF, 3366FF, 3399FF, 66CCFF, 99DDFF, 660066, 990099, CC00CC, FF00FF, FF99FF, FFC- CFF

deleteArea

Description

deleteArea deletes an area. All possibly existing vehicle assignments and schedules for this area will be deleted, too.

Technical details

SOAP endpoint address / function name areaService#deleteArea

Request limits 10 requests / minute

Parameters

deleteArea requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to deleteArea:

Parameter	Type	Description
areano	string (50)	<p>Identification number of an area. Unique within an account, case-sensitive.</p> <p>Note: Specify either areano or areauid; do not use both parameters in combination.</p>
areauid	string (30)	<p>A unique, unchangeable identifier for the area, automatically generated by WEBFLEET.</p> <p>Note: Specify either areano or areauid; do not use both parameters in combination.</p>

updateArea

Description

updateArea updates the details of an existing geographic area.

Technical details

SOAP endpoint address / function name areaService#updateArea

Request limits 10 requests / minute

Parameters


updateArea requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to updateArea

Parameter	Type	Description
areano	string (50)	<p>Identification number of an area. Unique within an account, case-sensitive.</p> <p>Note: It is mandatory to indicate at least areano or areauid to identify the area that needs to be updated. Indicate both when areano shall be updated.</p>
areauid	string (30)	<p>A unique, unchangeable identifier for the area, automatically generated by WEBFLEET.</p> <p>Note: It is mandatory to indicate at least areano or areauid to identify the area that needs to be updated. Indicate both when areano shall be updated.</p>
areaname	string (254)	<p>Display name of the area. This parameter is optional.</p>
type	int	<p>Classifies the geometric shape of this area. Valid values:</p> <ul style="list-style-type: none"> • 1 - rectangle • 2 - circle • 3 - polygon • 4 - corridor <p>This parameter is optional.</p>
active	boolean	<p>Indicator for whether an area is enabled. Valid values:</p> <ul style="list-style-type: none"> • 0 - area disabled • 1 - area enabled <p>This parameter is optional.</p>
validfrom	date	<p>Start date of a period to limit the validity of the area. This parameter is optional.</p>
validto	date	<p>End date of a period to limit the validity of the area. This parameter is optional.</p>
notificationmode	int	<p>Describes the type of activity for which events shall be created. The value defaults to 1 (enter/leave). When the vehicle passes the border of area one event is created. This parameter is optional.</p>

Parameter	Type	Description
eventlevel_enter	int	<p>Notification level (urgency) of the created event, when the vehicle enters the area.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • <empty> – No message • 1 – Notice • 2 – Warning • 3 – Alarm 1 • 4 – Alarm 2 • 5 – Alarm 3 <p>Value is only set if notificationmode = 1.</p> <p>Default value is <empty>.</p> <p>This parameter is optional.</p>
eventlevel_leave	int	<p>Notification level (urgency) of the created event, when the vehicle leaves the area.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • <empty> – No message • 1 – Notice • 2 – Warning • 3 – Alarm 1 • 4 – Alarm 2 • 5 – Alarm 3 <p>Value is only set if notificationmode = 1.</p> <p>Default value is <empty>.</p> <p>This parameter is optional.</p>
latitude	int	<p>Geographic latitude of the geometric centre of the shape (rectangle or circle).</p> <p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p> <p>This parameter is optional.</p> <p>For polygon and corridor, please use the parameter point multiple times to submit each point of the complex shape.</p>
longitude	int	See description for latitude for analogue use for longitude.
radius	int	<p>Radius of the area in meters.</p> <p>Only set if the area is a circle.</p> <p>This parameter is optional.</p>
width	int	<p>Width of the area in meters. Only set if area is a rectangle or corridor.</p> <p>This parameter is optional.</p>

Parameter	Type	Description
height	int	Height of the area in meters. Only set if area is a rectangle. This parameter is optional.
point	string	Comma-separated latitude/longitude pair, which describes a single point of the polygon or corridor (in WGS84 notation). <code><latitude>,<longitude></code> Repeat this parameter for each point in the shape.
		Note: Use HTTP-POST if the generated request URL is longer than 2000 characters. This parameter is optional.
color	string (6)	The color of the area as a 6-digit hex RGB-color code. This parameter is optional. The following colors are available within the WEBFLEET GUI: 
		The color codes for these colors are: 990000, CC0000, FF0000, FF6666, FF9999, FFCC- CC, DD6633, FF6600, FF9900, FFCC00, FFFF00, FFFF99, 006600, 009900, 00CC00, 00FF00, 99FF66, CCFF99, 006666, 009988, 00AA99, 00CCAA, 00DDCC, 00FFEE, 0000CC, 0033FF, 3366FF, 3399FF, 66CCFF, 99DDFF, 660066, 990099, CC00CC, FF00FF, FF99FF, FFC- CFF

getAreaPoints

Description

This action returns a list of coordinates describing the geometric form and location of an area. `getAreas-Points` is only useful for areas in the shape of polygons or corridors.

Technical details

SOAP endpoint address / function name areaService#getAreasPoints

Request limits 10 requests / minute

Parameters

getAreaPoints requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to getAreasPoints:

Parameter	Type	Description
areano	string (50)	<p>Identification number of an area. Unique within an account, case-sensitive.</p> <p>Note: Specify either areano or areauid; do not use both parameters in combination.</p>
areauid	string (30)	<p>A unique, unchangeable identifier for the area, automatically generated by WEBFLEET.</p> <p>Note: Specify either areano or areauid; do not use both parameters in combination.</p>
active	boolean	<p>Indicator for whether an area is enabled. Valid values:</p> <ul style="list-style-type: none">• 0 - area disabled• 1 - area enabled <p>Omit parameter to retrieve all areas. This parameter is optional.</p>

Result

Result for getAreasPoints

Parameter	Type	Description
areano	string (50)	Identification number of an area. Unique within an account, case-sensitive.
areauid	string (30)	A unique, unchangeable identifier for the area, automatically generated by WEBFLEET.

Parameter	Type	Description
latitude	int	<p>Geographic latitude of a single point of the corridor or polygon.</p> <p>Geographic latitude in the WGS84 coordinate system.</p> <p>Unit of measurement is micro degrees (10^{-6} grd).</p> <p>Transformation from degree, minutes and seconds can be done with the following calculation: (degrees + minutes/60 + seconds/3600) * 10^6 and rounding to an integer.</p> <p>See Geographic coordinate conversion on Wikipedia.</p>
longitude	int	See description for latitude for analogue use for longitude.

getAreaAssignments

Description

`getAreaAssignments` returns a list of vehicles and object groups, that are assigned to an area. Assignments can be used to limit the validity of the area to specific vehicles or object groups.

Technical details

SOAP endpoint address / function name `areaService#getAreaAssignments`

Request limits	10 requests / minute
----------------	----------------------

Parameters

`getAreaAssignments` requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `getAreaAssignments`:

Parameter	Type	Description
areano	string (50)	<p>Identification number of an area.</p> <p>Unique within an account, case-sensitive.</p> <p>Indicate either <code>areano</code> or <code>areauid</code>; do not use both parameters in combination.</p>
areauid	string (30)	<p>A unique, unchangeable identifier for the area, automatically generated by WEBFLEET.</p> <p>Indicate either <code>areano</code> or <code>areauid</code>; do not use both parameters in combination.</p>
objectno	string (10)	<p>Identifying number of an object.</p> <p>Unique within an account, case-sensitive.</p> <p>This parameter is optional. Indicate either <code>objectno</code> or <code>objectuid</code>; do not use both parameters in combination.</p>

Parameter	Type	Description
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. This parameter is optional. Indicate either <code>objectno</code> or <code>objectuid</code> ; do not use both parameters in combination.
objectgroupname	string (50)	A name of an object group. This parameter is optional.

Result

Result for `getAreaAssignments`:

Parameter	Type	Description
areano	string (50)	Identification number of an area. Unique within an account, case-sensitive.
areauid	string (30)	A unique, unchangeable identifier for the area, automatically generated by WEBFLEET.
assignmentuid	string (30)	A unique, unchangeable identifier for the assignment, automatically generated by WEBFLEET.
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Value is set if the area is assigned to this vehicle, <code>objectgroupname</code> is empty in this case.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Value is set if the area is assigned to this vehicle, <code>objectgroupname</code> is empty in this case.
objectgroupname	string (50)	A name of an object group. Value is set if the area is assigned to this group. <code>objectno</code> and <code>objectuid</code> are empty in this case.

insertAreaAssignment

Description

`insertAreaAssignment` adds a new assignment of a vehicle or object group to a specified area. Assignments can be used to limit the validity of the area to individual vehicles or object groups.

Technical details

SOAP endpoint address / function name `areaService#insertAreaAssignment`

Request limits	10 requests / minute
----------------	----------------------

Parameters

insertAreaAssignment requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to insertAreaAssignment:

Parameter	Type	Description
areano	string (50)	<p>Identification number of an area. Unique within an account, case-sensitive. This parameter is optional.</p> <p>Note: Indicate either areano or areauid; do not use both parameters in combination.</p>
areauid	string (30)	<p>A unique, unchangeable identifier for the area, automatically generated by WEBFLEET. This parameter is optional.</p> <p>Note: Indicate either areano or areauid; do not use both parameters in combination.</p>
objectno	string (10)	<p>Identifying number of an object. Unique within an account, case-sensitive.</p> <p>Note: It is required to indicate either objectno, objectuid, or objectgroupname; do not combine two or all of these parameters.</p>
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated.</p> <p>Note: It is required to indicate either objectno, objectuid, or objectgroupname; do not combine two or all of these parameters.</p>
objectgroupname	string (50)	<p>A name of an object group.</p> <p>Note: It is required to indicate either objectno, objectuid, or objectgroupname; do not combine two or all of these parameters.</p>

deleteAreaAssignment

Description

deleteAreaAssignment deletes one or more vehicle or objectgroup assignments of an area.

Technical details

SOAP endpoint address / function name areaService#deleteAreaAssignment

Request limits	10 requests / minute
----------------	----------------------

Parameters

deleteAreaAssignment requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to deleteAreaAssignment:

Parameter	Type	Description
areano	string (50)	<p>Identification number of an area. Unique within an account, case-sensitive.</p> <p>Note: Indicate either areano or areauid; do not use both parameters in combination.</p>
areauid	string (30)	<p>A unique, unchangeable identifier for the area, automatically generated by WEBFLEET.</p> <p>Note: Indicate either areano or areauid; do not use both parameters in combination.</p>
assignmentuid	string (30)	<p>A unique, unchangeable identifier for the assignment, automatically generated by WEBFLEET. Repeat this parameter for each assignment that shall be deleted. Use HTTP-POST if the generated request URL is longer than 2000 characters. This parameter is required.</p>

getAreaSchedules

Description

getAreaSchedules returns a list of days and times for which the area shall be effective. Schedules can be used to limit the validity of areas to specific days or time periods.

Technical details

SOAP endpoint address / function name areaService#getAreaSchedules

Request limits	10 requests / minute
----------------	----------------------

Parameters

getAreaSchedules requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to getAreaSchedules:

Parameter	Type	Description
areano	string (50)	<p>Identification number of an area. Unique within an account, case-sensitive.</p> <p>Note: Indicate either <code>areano</code> or <code>areauid</code>; do not use both parameters in combination.</p>
areauid	string (30)	<p>A unique, unchangeable identifier for the area, automatically generated by WEBFLEET.</p> <p>Note: Indicate either <code>areano</code> or <code>areauid</code>; do not use both parameters in combination.</p>

Result

Result for getAreaSchedules:

Parameter	Type	Description
areano	string (50)	<p>Identification number of an area. Unique within an account, case-sensitive.</p>
areauid	string (30)	<p>A unique, unchangeable identifier for the area, automatically generated by WEBFLEET.</p>
scheduleuid	string (30)	<p>A unique, unchangeable identifier for the schedule, automatically generated by WEBFLEET.</p>
mon	boolean	<p>Indicates if the area is activated on this day. Valid values:</p> <ul style="list-style-type: none"> • 0 - area disabled • 1 - area enabled
tue	boolean	See mon.
wed	boolean	See mon.
thu	boolean	See mon.
fri	boolean	See mon.
sat	boolean	See mon.
sun	boolean	See mon.

Parameter	Type	Description
start_time	string (5)	Time of day, the activation of the area starts on each of the days above. Format hh:mm, in the local time zone of the user.
end_time	string (5)	Time of day, the activation of the area ends on each of the days above. Format hh:mm, in the local time zone of the user.

insertAreaSchedule

Description

`insertAreaSchedule` adds a list of weekdays and times for which the area shall be effective. Schedules can be used to limit the validity of areas in a temporal way.

Technical details

SOAP endpoint address / function name `areaService#insertAreaSchedule`

Request limits	10 requests / minute
----------------	----------------------

Parameters

`insertAreaSchedule` requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `insertAreaSchedule`:

Parameter	Type	Description
areano	string (50)	Identification number of an area. Unique within an account, case-sensitive.
areauid	string (30)	A unique, unchangeable identifier for the area, automatically generated by WEBFLEET.

Note: Indicate either `areano` or `areauid`; do not use both parameters in combination.

Note: Indicate either `areano` or `areauid`; do not use both parameters in combination.

Parameter	Type	Description
mon	boolean	<p>Indicates if the area is activated on this day.</p> <p>Valid values:</p> <ul style="list-style-type: none"> • 0 - area disabled • 1 - area enabled <p>This parameter is optional.</p>
tue	boolean	See mon.
wed	boolean	See mon.
thu	boolean	See mon.
fri	boolean	See mon.
sat	boolean	See mon.
sun	boolean	See mon.
start_time	string (5)	<p>Time of day, the activation of the area starts on each of the days above.</p> <p>Format hh:mm, in the local time zone of the user.</p> <p>Default value is 00:00.</p> <p>This parameter is optional.</p>
end_time	string (5)	<p>Time of day, the activation of the area ends on each of the days above.</p> <p>Format hh:mm, in the local time zone of the user.</p> <p>Default value is 23:59.</p> <p>This parameter is optional.</p>

deleteAreaSchedule

Description

`deleteAreaSchedule` deletes one or more schedules of an area.

Technical details

SOAP endpoint address / function name `areaService#deleteAreaSchedule`

Request limits	10 requests / minute
----------------	----------------------

Parameters

deleteAreaSchedule requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `deleteAreaSchedule`:

Parameter	Type	Description
areano	string (50)	<p>Identification number of an area. Unique within an account, case-sensitive.</p> <p>Note: Specify either areano or areauid; do not use both parameters in combination.</p>
areauid	string (30)	<p>A unique, unchangeable identifier for the area, automatically generated by WEBFLEET.</p> <p>Note: Specify either areano or areauid; do not use both parameters in combination.</p>
scheduleuid	string (30)	<p>A unique, unchangeable identifier for the schedule, automatically generated by WEBFLEET.</p> <p>Repeat this parameter for each assignment that shall be deleted. Use HTTP-POST if the generated request URL is longer than 2000 characters.</p> <p>This parameter is required.</p>

LINK.connect

For documentation of the LINK.connect functionality and integration between third party devices and LINK devices, terms and abbreviations used please refer to the LINK.connect Reference document at <https://www.webfleet.com/webfleet/partners/integration/developer-resources/>

API key mandatory

Note: All LINK.connect-related functions require a dedicated API key.

Always use a dedicated API for the LINK.connect integration solution that you will develop.

sendAuxDeviceData

Description

sendAuxDeviceData sends the given opaque payload data to the specified third party device using the indicated WEBFLEET unit/LINK device.

Maximum allowed data size is 2560 byte raw opaque payload data. The base64 encoding required for transmission of opaque payload through the web service API does not count as raw payload data size.

There can only be one pending aux device data message for a LINK at a time. Further calls to sendAuxDeviceData for the same LINK will be rejected until the data is transferred to the LINK.

To track the status of the opaque payload message once sent, please use the WEBFLEET.connect Queue Service.

Technical details

SOAP endpoint address / function name auxDeviceDataService#sendAuxDeviceData

Request limits	10 requests / minute
----------------	----------------------

Parameters

sendAuxDeviceData requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to sendAuxDeviceData:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. This parameter is required.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. This parameter is required.

Parameter	Type	Description
data	base64(raw(2560))Base64 encoded user payload. the data is not interpreted by WEBFLEET.	
deviceid	string	Identifier of the aux device. In case of Bluetooth, this is the Bluetooth adapter MAC address (Bluetooth device address) in the 6 byte notation separated by colon, e.g. 11:22:33:44:55:66
correlationid	int	An arbitrary identifier which helps to identify the WEBFLEET messages in the message queue service that belong to this request. Should be unique in the integration server backend. Optional.

LINK to aux device connection handling when sending opaque payload

The LINK will try to connect to the specified aux device, if the device is not already connected. If the LINK is not paired to the aux device yet, it will initiate a Bluetooth pairing if needed. The configured PIN is used for pairing.

Data will be transferred to the aux device when a Bluetooth connection exists. If the LINK is unable to establish this connection the opaque payload will remain in the LINK's opaque payload data message queue, reducing the size of this queue.

getLocalAuxDeviceConfig

Description

getLocalAuxDeviceConfig returns the stored and applicable configuration of a WEBFLEET unit regarding Bluetooth connectivity.

Technical details

SOAP endpoint address / function name auxDeviceDataService#getLocalAuxDeviceConfig

Request limits	10 requests / minute
----------------	----------------------

Parameters

getLocalAuxDeviceConfig requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to getLocalAuxDeviceConfig:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. This parameter is optional.

Parameter	Type	Description
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. This parameter is optional.

Result

Result for getLocalAuxDeviceConfig:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated.
servicename	string (32)	Local Bluetooth service name of the LINK.
serviceuuid	UUID(128)	Local Bluetooth service UUID in 128 bit UUID format.
authentication	boolean	Flag indicating whether authentication for local SPP service is enabled.
addgpsfix	boolean	Flag indicating whether the LINK adds GPS data to every opaque payload data message.
addtimestamp	boolean	Flag indicating whether the LINK adds a time stamp to every opaque payload data message.
addodometer	boolean	Flag indicating whether the LINK adds the current odometer value to every opaque payload data message.

configureLocalAuxDevice

Description

configureLocalAuxDevice allows the integration server backend to change configuration settings relating to aux devices. Currently the settings are specific to Bluetooth.

Note: All configuration parameters are optional. Parameters not specified in the request will not be changed.

Technical details

SOAP endpoint address / function name auxDeviceDataService#configureLocalAuxDevice

Request limits	10 requests / minute
----------------	----------------------

Parameters

configureLocalAuxDevice requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to configureLocalAuxDevice:

Parameter	Type	Description
objectno	string (10)	<p>Identifying number of an object. Unique within an account, case-sensitive.</p> <p>Note: Either <code>objectno</code> or <code>objectuid</code> is required.</p>
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated.</p> <p>Note: Either <code>objectno</code> or <code>objectuid</code> is required.</p>
servicename	string (32)	Local Bluetooth service name of the LINK.
serviceuuid	UUID(128)	Local Bluetooth service UUID in 128 bit UUID format.
authentication	boolean	<p>Flag indicating whether authentication for local SPP service is enabled. When set to 1 authentication for local SPP service is enabled.</p>
addgpsfix	boolean	<p>Flag indicating whether the LINK adds GPS data to every opaque payload data message. When set to 1 the LINK will add GPS data to every opaque payload data message.</p>
addtimestamp	boolean	<p>Flag indicating whether the LINK adds a time stamp to every opaque payload data message. When set to 1 the LINK will add a time stamp to every opaque payload data message.</p>
addodometer	boolean	<p>Flag indicating whether the LINK adds the current odometer value to every opaque payload data message. When set to 1 the LINK will add the current odometer value to every opaque payload data message.</p>

getRemoteAuxDeviceConfig

Description

getRemoteAuxDeviceConfig returns the stored and applicable configuration of a WEBFLEET unit regarding Bluetooth remote aux devices.

Technical details

SOAP endpoint address / function name auxDeviceDataService#getRemoteAuxDeviceConfig

Request limits	10 requests / minute
----------------	----------------------

Parameters

getRemoteAuxDeviceConfig requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to getRemoteAuxDeviceConfig:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Either of <code>objectno</code> or <code>objectuid</code> is mandatory.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Either of <code>objectno</code> or <code>objectuid</code> is mandatory.

Result

Result for getRemoteAuxDeviceConfig:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated.
configid	int	Identifies the remote aux device configuration. Every remote device configuration for a LINK must have a unique identifier.
deviceid	string	Identifier of the remote aux device. In the case of Bluetooth, this is the Bluetooth adapter MAC address (Bluetooth device address) in the 6 byte notation. Separated by colon, e.g. 11:22:33:44:55:66.
friendlyname	string (248)	A name for the remote device that is easier to read for humans. Maximum length is 248 bytes UTF-8.
servicename	string (32)	Remote device SPP service name.
serviceuuid	UUID(128)	Remote device SPP service UUID in 128 bit UUID format.
channel	int	RFCOMM channel ID (1..30).
pin	string(16)	Bluetooth PIN to be used for pairing. When set to an empty value, no PIN will be used. Maximum length is 16 bytes UTF-8.
sppbuffersize	int	SPP buffer threshold of the LINK for conversion of SPP data streams (from aux device to LINK) to opaque payload messages. Maximum 1024 Byte.

Parameter	Type	Description
sppflushtimeout	int	SPP buffer timeout (ms) of the LINK for conversion of SPP data streams (from aux device to LINK) to opaque payload messages. Maximum 5000 ms.

configureRemoteAuxDevice

Description

configureRemoteAuxDevice allows the integration server backend to change configuration settings relating to a remote aux device.

Currently the settings are specific to Bluetooth. All configuration parameters are optional. Parameters not specified in the request will not be changed. To remove a value, specify `null` or use an empty parameter value.

Technical details

SOAP endpoint address / function name auxDeviceDataService#configureRemoteAuxDevice

Request limits	10 requests / minute
----------------	----------------------

Parameters

configureRemoteAuxDevice requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to configureRemoteAuxDevice:

Parameter	Type	Description
objectno	string (10)	<p>Identifying number of an object. Unique within an account, case-sensitive.</p> <p>Note: Either <code>objectno</code> or <code>objectuid</code> is required.</p>
objectuid	string (30)	<p>A unique, unchangeable identifier for the indicated object, automatically generated.</p> <p>Note: Either <code>objectno</code> or <code>objectuid</code> is required.</p>
configid	int	<p>Identifies the remote aux device configuration. Every remote device configuration for a LINK must have a unique identifier. The maximum allowed number of remote device configurations per LINK is 5. Valid values: 0 ... 4</p>

Parameter	Type	Description
deviceid	string	Identifier of the remote aux device. In the case of Bluetooth, this is the Bluetooth adapter MAC address (Bluetooth device address) in the 6 byte notation. Separated by colon, e.g. 11:22:33:44:55:66
		Note: Either deviceid or friendlyname is required.
friendlyname	string (248)	Remote device Friendly name. Maximum length is 248 bytes UTF-8.
		Note: Either deviceid or friendlyname is required.
servicename	string (32)	Remote device SPP service name.
serviceuuid	UUID(128)	Remote device SPP service UUID in 128 bit UUID format.
channel	int	RFCOMM channel ID (1..30).
pin	string(16)	Bluetooth PIN to be used for pairing. When set to an empty value, no PIN will be used. Maximum length is 16 bytes UTF-8.
sppbuffersize	int	SPP buffer threshold of the LINK for conversion of SPP data streams (from aux device to LINK) to opaque payload messages. Maximum 1024 Byte.
sppflushtimeout	int	SPP buffer timeout (ms) of the LINK for conversion of SPP data streams (from aux device to LINK) to opaque payload messages. Maximum 5000 ms.

removeRemoteAuxDeviceConfig

Description

removeRemoteAuxDeviceConfig removes a remote aux device configuration.

Technical details

SOAP endpoint address / function name auxDeviceDataService#removeRemoteAuxDeviceConfig

Request limits	10 requests / minute
----------------	----------------------

Parameters

removeRemoteAuxDeviceConfig requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to removeRemoteAuxDeviceConfig:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Either of <code>objectno</code> or <code>objectuid</code> is mandatory.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Either of <code>objectno</code> or <code>objectuid</code> is mandatory.
configid	int	Identifies the remote aux device configuration. Every remote device configuration for a LINK must have a unique identifier. The maximum allowed number of remote device configurations per LINK is 5. Valid values: 0 ... 4. This parameter is required.

clearAuxDeviceDataQueue

Description

`clearAuxDeviceDataQueue` removes data from the outgoing queue of the LINK. This can be used to remove stale data for third party devices that do not exist anymore or that are unlikely to connect anymore. The LINK does not remove outgoing data by itself because it cannot decide if a third party device will connect sometime.

Technical details

SOAP endpoint address / function name `auxDeviceDataService#clearAuxDeviceDataQueue`

Request limits	10 requests / minute
----------------	----------------------

Parameters

`clearAuxDeviceDataQueue` requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `clearAuxDeviceDataQueue`:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive.

Note: Either `objectno` or `objectuid` is mandatory.

Parameter	Type	Description
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Note: Either <code>objectno</code> or <code>objectuid</code> is mandatory.
deviceid	string	Identifier of the remote aux device. In the case of Bluetooth, this is the Bluetooth adapter MAC address (Bluetooth device address) in the 6 byte notation. Separated by colon, e.g. 11:22:33:44:55:66 This parameter is optional.

resetAuxDeviceData

Description

If the LINK does not respond to outgoing aux device data sent with [sendAuxDeviceData](#) the transfer status is incomplete. In such cases `resetAuxDeviceData` must be used to reset the outgoing data transfer and get back to a consistent state between integration server backend and aux device. This is important because you cannot send new data until the current transfer is completed or cancelled/reset. If the opaque payload to be delivered with the original send is still important from the view of `LINK.connect` integration solution, the integration server backend should repeat the `sendAuxDeviceData` operation after the reset.

Technical details

SOAP endpoint address / function name `auxDeviceDataService#resetAuxDeviceData`

Request limits	10 requests / minute
----------------	----------------------

Parameters

`resetAuxDeviceData` requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `resetAuxDeviceData`:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Note: Either <code>objectno</code> or <code>objectuid</code> is mandatory.
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Note: Either <code>objectno</code> or <code>objectuid</code> is mandatory.

Plugins

insertExternalEvent

Description

`insertExternalEvent` allows integrators to create own events for vehicles. The events are handled in the same way like internal events created by WEBFLEET. The user of the WEBFLEET user interface can see notifications for the events and is able to acknowledge and/or resolve them. Also notification forwarding and reporting works as usual.

Use cases are for example warnings for external temperature or tire pressure sensors. Gathering of the data and decisions about warnings or alarm levels is up to the 3rd party integrator.

Prerequisites

1. The integrator needs to register a WEBFLEET Plugin. The plugin is tied to the API key.
2. The WEBFLEET customer needs to purchase the additional feature **WEBFLEET Plugin** to have the plugin data available in WEBFLEET. This is booked per vehicle (object).

Please refer to the [WEBFLEET Plugin developer guide](#) for more information.

Technical details

SOAP endpoint address / function name `pluginsService#insertExternalEvent`

Request limits 5 requests / minute

Parameters

`insertExternalEvent` requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `insertExternalEvent` :

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .
data	string	JSON containing the event payload. The content is validated against the JSON schema.

setExternalObjectData

Description

`setExternalObjectData` allows integrators to specify arbitrary data for a vehicle in a well-defined JSON format. The data is shown on the WEBFLEET user interface. The intended use is to display measured data from sensors or other equipment, such as temperature, tire pressure, cargo load etc. Gathering such data is up to the 3rd party integrator.

Prerequisites

1. The integrator needs to register a WEBFLEET Plugin. The plugin is tied to the API key.
2. The WEBFLEET customer needs to book the additional feature WEBFLEET Plugin to have the plugin data available in WEBFLEET. This is booked per vehicle (object).

Please refer to the [WEBFLEET Plugin developer guide](#) for more information.

Technical details

SOAP endpoint address / function name `pluginsService#setExternalObjectData`

Request limits 10 requests / minute

Parameters

setExternalObjectData requires the following common parameters:

- [Authentication parameters](#)
- [General parameters](#)

Parameters specific to `setExternalObjectData`:

Parameter	Type	Description
objectno	string (10)	Identifying number of an object. Unique within an account, case-sensitive. Can be used alternatively to <code>objectuid</code> .
objectuid	string (30)	A unique, unchangeable identifier for the indicated object, automatically generated. Can be used alternatively to <code>objectno</code> .
data	string	JSON containing the event payload. The content is validated against the JSON schema.

Appendix A Operation response codes

Response codes

Response code	Message	Description
0	The operation was successful.	
1	Your last action could not be processed	A system error has occurred.
8	A constraint violation occurred. No detailed information available.	
9	One of the entered values is too large. Please check your input.	
20	Your last action could not be processed.	A system error has occurred.
40	Your last action could not be processed.	A system error has occurred.
45	Access denied. You have insufficient permissions to perform this function.	
47	The time period you have entered is invalid. Please enter a valid time period.	Invalid time period.
55	Action is not valid	Indicates that the API method supplied as the parameter <code>action</code> is not available. Check your parameter for typos.
60	General error.	
63	Document contains no data	Indicates that the result set is empty for the specific combination of parameters provided for the request.
123	Unknown macro command or unit not initialised.	
1100	User name already exists for this account.	
1101	User invalid (does not exist).	
1105	Password must be given.	Either the password is empty or the parameter was not part of your request. You need to provide a password.
1106	Authentication failed. check account/username/password.	Either the account or the username supplied does not exist or the password is wrong.
1112	The input field "Username" must not be empty.	

Response code	Message	Description
1114	User profile missing or invalid.	
1115	New password missing.	
1123	New password must not be the username.	
1124	New password too short (at least 5 characters required).	
1125	Password not allowed (blacklisted).	
1126	New password must not be the account name.	
1127	Old password missing.	
1128	New password too simple.	
1129	New password must not be a part of the users real name.	
1130	The account is temporary blocked.	
1132	The account is not valid anymore.	
1140	The user is not valid anymore.	
1143	API key is invalid	
1144	Session invalid or expired.	
1146	Password expired	
1147	Interface style invalid.	The used interface style parameter is not a valid interface style.
1148	User profile for interface style invalid.	The user profile for the interface style of this user is invalid.
1220	Right level does not fit to given entity.	
1221	Unknown right level.	
1223	Right level is not allowed for the user.	Changing the given right level for the given user is not allowed.
2109	The provided object number doesn't exist.	objectno is invalid.
2110	Invalid objectgroupname	objectgroupname is invalid.

Response code	Message	Description
2112	Specify either objectno or objec-tuid, not both.	
2210	Contract not valid	The contract for the object used in the request is not valid (e.g. has expired).
2307	The referenced event forward-ing configuration does not exist within the account.	
2308	The event forward configuration is missing.	
2501	Please enter a date of execution.	Missing order date
2502	Please enter an order text.	Missing order text
2503	Deficient address data	The address format is invalid.
2504	The entered time of arrival has an invalid format.	Invalid arrival time format.
2505	Invalid duration format	The duration format is invalid.
2506	Please enter the coordinates of the order destination.	Missing order destination coordinates.
2507	The entered order destination coordinates have an invalid for-mat.	Invalid format of order destination coordinates.
2508	Invalid format order number	The order number format is invalid.
2509	The provided order number doesn't exist.	
2510	Order was already sent.	
2511	Missing object number.	
2512	Invalid street address.	
2513	The entered telephone number has an invalid format.	
2514	Incomplete destination descrip-tion.	
2515	Duplicate Order number.	Use sendDestinationOrderExtern or updateOrderExtern if you need to modify an existing order.
2516	The selected order number is in-valid or not unique.	
2517	Updating the order type of an al-ready existing order is not sup-ported.	

Response code	Message	Description
2600	Maximum message text length (UTF-8 format) exceeded	
2601	Maximum order text length (UTF-8 format) exceeded	
2602	Maximum order number length exceeded	
2603	Feature not supported.	
2604	The feature sendText is not supported by this unit	The addressed device is either used with a tariff that doesn't include messaging or hasn't been configured properly (PND not paired during initialization).
2605	The feature sendOrder is not supported by this unit	The addressed device is either used with a tariff that doesn't include messaging or hasn't been configured properly (PND not paired during initialization).
2607	Order state is invalid or missing.	
2608	Order state cannot be disabled.	
2609	Event level not supported.	
2610	Order state has to be enabled or disabled.	
2611	Order state not supported.	
2614	Invalid waypoint parameter.	
2615	Itinerary orders not supported for this unit type.	The unit does not support orders with itineraries.
2616	Too many waypoints.	The amount of waypoints is too large.
2617	Itinerary distance is too long.	The overall straight line distance of the order's itinerary is too long.
2618	Waypoint description text is too long.	
32000	Feature plugins not booked for this vehicle.	
32001	Invalid JSON data.	
32002	No plugin registered for the API key.	
32003	Invalid schema version number in JSON data.	
32004	Invalid external URL in JSON element href.	

Response code	Message	Description
32005	Missing parameter data. It must contain a JSON string.	
32006	Object is currently tied to external data of another plugin. Try again later when those external data have expired.	
32007	The total size of all translation strings exceeds the limit.	
33022	Unknown output name	The output name used in the request is not configured for the LINK device.
4000	An address by the same key exists already in the account.	
4001	The address does not exist.	
4002	An address with the same identification does already exist.	
4003	The address group does not exist.	
4004	A group of the same name / identification does already exist.	
4006	A name must be provided for an address.	
4007	A number identifying an address within an account must be provided.	
4008	The name of an address group can not be NULL or empty	
4009	The micro degree value of a geo-coordinate (latitude, longitude) is outside the allowed range. The allowed range is a non-null value of -180000000 to +180000000 micro degrees.	
4010	A unique, non-null Identifier for an address group within an account must be given!	
4107	Invalid accountname	
6210	areano already exists.	
6211	areano parameter missing or invalid.	

Response code	Message	Description
6212	areaname parameter missing or invalid.	
6213	radius parameter missing or invalid.	
6214	width parameter missing or invalid.	
6215	height parameter missing or invalid.	
6218	Please specify at least one weekday for scheduled activation of this area.	
6219	Format of time parameter invalid. please specify the time in HH:mm format.	
6221	Specify either areano or areauid to identify the area.	
6222	Area not found.	
6223	area type parameter missing or invalid.	
6224	validfrom parameter invalid.	
6225	validto parameter invalid.	
6226	area contains an invalid geo-position.	
6227	area contains an invalid event level.	
6228	assignmentuid parameter missing or invalid.	
6229	Specify one of objectno, objectuid or objectgroupname.	
6230	scheduleuid parameter missing or invalid.	
6231	End time must be greater than start time.	
6232	Area assignment already exists.	
6233	Specify either areano or areauid, not both.	
6234	area assignment does not exist.	

Response code	Message	Description
6235	Area schedule does not exist.	
6236	Maximum number of points exceeded.	
6237	Maximum count of available of areas exceeded.	
6238	Color parameter invalid.	The used color parameter is not a valid 6-digit hex RGB-color code.
8000	General system error.	
8011	Request quota reached. More than n requests in t seconds are not permitted	Your request exceeds the quota defined for that request type or that request group. See Request limits .
8014	External requests are not allowed for that account/user. Please make sure that an API key is used and the user has the WEBFLEET.connect access right.	See Access to WEBFLEET.connect with API Key .
8015	Account / username busy processing other request.	Requests using the same account-username pair must always be serialised and may not overlap. Occurs if you did not wait long enough for a response from the previous request and prematurely terminated the connection. The recommended timeout for requests is 300 seconds. Requests may be retried after a 10 second wait interval, but might fail again until the initial request has timed out.
8104	Action missing or invalid.	
8105	Language missing or invalid.	
9000	Your last WEBFLEET.connect action could not be processed.	
9001	invalid parameter (range_pattern)	The <code>range_pattern</code> is invalid for this operation, please see the operation's documentation for the allowed range.
9002	missing parameter (range_pattern)	The <code>range_pattern</code> is missing for this operation, please see the operation's documentation for the allowed range.
9003	missing parameter (objectno)	
9004	invalid parameters (rangefrom_string, rangeto_string)	The time period given by <code>rangefrom_string</code> and <code>rangeto_string</code> exceeds the allowed time range for this operation and parameter combination, please see the documentation for the allowed range.

Response code	Message	Description
9005	invalid parameter (msgid)	The msgid is not known to the system - the message might have been deleted after being outdated.
9006	missing parameter(s) (range_pattern and/or msgid)	You need to provide either a msgid or date range filter parameters (see Date range filter parameters)
9007	invalid parameter (rangefrom_string)	The use of range_pattern requires values for rangefrom_string and rangeto_string.
9008	invalid parameter (rangeto_string)	The use of range_pattern requires values for rangefrom_string and rangeto_string.
9009	invalid parameters (rangefrom_string must be a date before rangeto_string)	
9010	invalid orderstate (must be 0 100 101 102 103 201 202 203 204 205 221 222 223 224 225 241 242 243 244 245 298 299 301 302 401)	
9011	invalid ordertype (must be 1 2 3)	
9012	missing parameter(s) (orderid, objectid)	
9013	wrong state, order not re-assignable	
9014	no valid contract for object	
9015	no valid id given	
9016	no trip id, objectno and/or date range given	
9017	For the date range given an objectno also needs to be given.	
9018	driver does not exist	
9019	driver group does not exist	
9020	driver name is missing	
9021	driver number is missing or invalid	
9022	driver group name is missing or invalid	
9023	driver pin must be not empty and must be a number	

Response code	Message	Description
9024	driver code must be a number	
9025	driver number must be unique	
9026	driver group name must be unique	
9027	country of driver invalid	
9028	driver group not unique or not existing	
9029	driver not unique or not existing	
9030	driver already in group	
9031	driver not in group	
9032	driver company invalid	
9033	driver description invalid	
9034	driver zip invalid	
9035	driver city invalid	
9036	driver street invalid	
9037	driver mobile invalid	
9038	driver private telephone invalid	
9039	driver email invalid	
9040	driver code not unique	
9041	tachograph card id invalid	
9042	tachograph card country invalid	
9044	tachograph card is already assigned to other driver	
9047	driver is already assigned to other ibutton	The driver was already assigned a button id. Remove the assignment first by providing an empty button id.
9048	ibutton already assigned to other driver	The button id is already assigned to another driver. Remove this assignment first by updating the other driver with an empty button id.
9050	Driver is already assigned non-manually	
9051	There's a driver already assigned to the vehicle non-manually	

Response code	Message	Description
9052	Driver is not assigned to the specific vehicle.	
9053	Manual driver detach not possible for non-manual assignments.	
9054	Conflicting driver parameters (driverno vs. drivergroupname)	
9056	Specify either driverGroupName or driverGroupUid, not both	
9058	Remaining driving time feature not enabled for driver's unit.	Also occurs if the driver is not attached to any unit.
9060	event does not exist	
9061	event is not on alarm level	Use resolveEventExtern to flag this event as resolved.
9062	event is not below alarm level	Use acknowledgeEventExtern to flag this event as acknowledged before resolving it.
9063	eventid invalid	
9064	event already resolved	
9065	event already acknowledged	
9066	event level unknown	The event level parameter eventlevel_cur provided is not within the defined range.
9067	event state unknown	One of the event state parameters (resolved, acknowledged) provided is not within the defined range.
9069	The driver key is invalid	
9070	The driver key type is not assigned to this driver	
9071	The driver key is already assigned to another driver	
9080	order does not exist	
9081	order not yet assigned to unit	
9082	order is assigned to an other unit already	
9083	orderid parameter missing or invalid	
9100	object does not exist	

Response code	Message	Description
9101	objectno parameter missing or invalid	
9102	Invalid object group name	
9104	date-rage is unparsable	
9107	licence plate number parameter invalid	
9114	This operation is presently not supported.	
9122	Object group name is missing or invalid.	
9123	object-no is not part of this object group name	Both objectno and objectgroupname are given and the objectno and objectgroupname exist, but the objectno is not part of the objectgroup.
9124	Object already in group.	
9125	Object group name is missing or invalid or not unique.	
9126	Object no is missinig or invalid or not unique.	
9127	Object group already exists.	
9130	Odometer parameter invalid.	
9131	Conflicting object parameters (objectno/objectuid vs. object-groupname)	
9135	manufactureyear parameter invalid	This message is returned if the indicated year is not an 4 digit integer value.
9150	This action is not applicable with an order in this state.	
9152	Output status invalid.	
9155	Message category invalid.	
9160	The geo position (lat/long) is invalid.	
9161	Address geo position is invalid.	The geo-position of the address is invalid.
9162	The parameter for modified since time is invalid.	
9170	The email format is invalid.	

Response code	Message	Description
9171	Maximum data amount for an email is exceeded.	
9172	Filter parameter invalid.	
9173	No report configuration found.	
9174	No report template found.	
9176	Report generation failed.	
9177	Report name parameter invalid.	
9179	Report type parameter invalid.	
9180	Report format parameter invalid.	
9181	Report ID parameter missing or invalid.	
9182	Report does not exist.	
9184	Invalid parameter (referen-ceno).	
9195	The request parameters for this request are invalid. Please make sure you provide parameters that adhere to the required structure (see documentation or) and the minimum amount of request data as documented.	Invalid parameter(s).
9196	Some or all request parameters are missing or incomplete. The request can not be processed.	Missing or incomplete parameter(s).
9197	The current combination of parameters can not be processed as-is. Please provide fewer / differently combined parameters.	Invalid combination of parameter(s).
9198	The current request with the parameters given processed successfully, but with an empty result.	Indicates that the result set is empty for the specific combination of parameters provided for the request.
9199	An upstream system did not respond properly. At the moment we are unable to service this request.	
9200	Maximum period length exceeded (range_pattern)	
9300	Date invalid, since it lies in the future or >90 days in past.	

Response code	Message	Description
9301	Invalid day.	
9302	non-numeric value	
9303	value out of range	This error code is returned for SOAP errors. See also Operation response codes for queues
9304	no duplicates allowed.	
9305	geofence-area-id duplicate entry.	
9306	unknown entry.	
9310	invalid geographical coordinate, see WGS84 standards	
9311	invalid or unknown geofence-as- signment-id	
9312	invalid or unknown ge- ofence-area-id	
9500	Address street parameter invalid	
9501	Address street number parame- ter invalid.	
9504	Message: address country code parameter invalid or missing	
9514	Unable to calculate an appropri- ate route.	
9517	empty geocoding result	
9538	Address not valid	
9543	name1 parameter invalid	
9544	name2 parameter invalid	
9545	name3 parameter invalid	
9546	addrregion parameter invalid	
9547	contact parameter invalid	
9548	fax parameter invalid	
9549	mailaddr parameter invalid	
9550	teloffice parameter invalid	
9551	telmobile parameter invalid	
9552	telprivate parameter invalid	

Response code	Message	Description
9074	Remaining Driving Time configuration invalid. Please check possible configuration options.	
9075	Remaining Driving Time configuration: Country missing or invalid.	
9076	Remaining Driving Time configuration: Regulation type missing or invalid.	
9077	Remaining Driving Time configuration: Employment type missing or invalid.	
10000	Operation time-out, retry later.	Resource currently busy, try again later.
10020	Operation service error	Returned when calling downstream service.
10100	Request intercepted and blocked by application security manager (request id = <some id>).	This error is returned when the format of the HTTP request is invalid.
20003	User name missing or invalid.	
20004	Password missing or invalid.	
20005	Real name missing.	
20006	Company name missing or invalid.	
20007	Info parameter is invalid.	
20008	Own user cannot be modified or deleted.	
20009	Specify either username or useruid, not both.	
20010	Specify either username or useruid to identify the user.	
20101	Object no, object group name, driver no or driver group name missing or invalid.	
20100	driverno or objectno or both are missing or invalid	
21007	UID invalid	
22015	Logbook flag is invalid	
22016	Logbook purpose is invalid	

Response code	Message	Description
22017	Logbook contact is invalid	
22018	Logbook comment is invalid	
22020	Logbook modification reason invalid	
22023	Aggregation level invalid.	
22024	KPI name(s) invalid.	
22036	The new driver is already assigned to other trips for the same period	
23003	ecoPLUS BT address invalid.	
23004	Remote LINK Bluetooth address invalid.	
23005	Invalid config value.	
23007	The request parameter is invalid.	
23008	Wakeup-timers parameter missing or invalid.	
24000	Tracking feature disabled	
25001	The allowed monthly quota has been exceeded	
26001	Schedule does not exist	
26002	Schedule type parameter missing or invalid	
26003	Rule type parameter missing or invalid	
26007	Resolution status parameter invalid	
26009	Schedule name parameter missing or invalid	
26010	Schedule description parameter invalid	
26013	Reminding time parameter missing or invalid	
26014	Reminding odometer parameter missing or invalid	
26015	Interval odometer parameter missing or invalid	

Response code	Message	Description
26016	Interval time parameter missing or invalid	
26018	Next execution odometer parameter missing or invalid	
26019	Task does not exist	
27001	Cannot decode binary message data.	
27002	Sending of binary message data not enabled for this unit.	
27003	Binary message data missing.	
27004	Maximum size of data exceeded.	
27005	Maximum length of application identifier exceeded.	
27006	The application ID contains invalid characters.	
27007	The application ID is missing.	
27008	Another binary mesage data transfer is already in progress.	
28000	The size of the aux data is too large.	
28002	There's already another aux data transfer in progress. Additional data can only be sent when the LINK has acknowledged the previously sent data.	
28003	Data parameter missing.	
28004	The SPP buffer size is invalid.	
28005	The SPP flush timeout is invalid.	
28006	Cannot decode auxiliary device data. The base64 encoding may be wrong.	
28007	Service name is too long.	
28008	Service UUID has an invalid format.	
28009	Aux device data feature is not enabled for this unit.	

Response code	Message	Description
28010	Config ID for remote device configuration is missing or invalid.	
28011	Config ID for remote device configuration too large.	
28012	Device ID missing.	
28013	Device ID has an invalid format.	
28014	RFCOMM channel number is invalid	
28015	Bluetooth PIN too long	
28016	Bluetooth PIN has invalid characters	
28017	Bluetooth device name (friendly name) invalid	
28018	Remote BD_ADDR or friendly name is required	
29000	Unable to retrieve unit configuration	
29001	No dedicated status message available	
29002	Object is already synchronized with account defaults	
29003	Message text parameter is too long	
29004	Message parameter is missing	
29005	Message in message parameter is invalid	
29006	Message parameter or reset flag missing	
29007	Specify either message parameter or reset flag, not both	
29008	Index is invalid	
29009	Multiple messages with the same index defined	

Response codes - Queues

Response code	Message	Description
WFCQ_E0001	queue database doesn't exist for {0}	
WFCQ_E0006	skipped creation of queue, exists already	Returned by createQueueExtern if a queue for that msgclass already exists for that user. The creation has been skipped and no changes were made to the existing queue.
WFCQ_E0007	queue to acknowledge doesn't exist	The operation ackQueueMessagesExtern could not be executed as there is no queue for the msgclass provided.
WFCQ_E0022	queue to pop doesn't exist	There is no queue for the msgclass provided. A queue needs be created with createQueueExtern before trying to retrieve messages from it.
WFCQ_E0033	Hint: can contain multiple error messages	Please check the returned error message for further details.
WFCQ_E0034	queue unknown, no subscription(s) found	
WFCQ_E0035	authentication failed	The username does not exist or the password does not validate.
WFCQ_E0037	queue doesn't exist, skipping deletion	A queue that has not been created (createQueueExtern) first cannot be deleted.
WFCQ_E0041	account unknown	The account name does not exist.
WFCQ_E0043	shutdown was already initiated, no more calls allowed	
WFCQ_E0053	error due to being finally unable to resolve a deadlock while processing tx	
WFCQCS_E0000	"action" unknown	The operation named in the action is not available.
WFCQCS_E0001	one or more of "action parameter missing", "account parameter missing", "username parameter missing", "password parameter missing", "msgclass parameter missing"	
WFCQCS_E0003	empty result	
WFCQCSWS_UN- KNOWN	problems processing your request, please try again later	There are (likely transient) problems, that prevent the operation from completing successfully.

Appendix B: Resources

WEBFLEET.connect resources

- WEBFLEET.connect [developer resources](#)
Download the latest documentation, libraries, examples and localised activation forms.
- WEBFLEET.connect [API-key request](#)
Request an API key to gain access to WEBFLEET APIs.
- WEBFLEET.connect [discussion group](#)
Turn to this discussion group if you have general questions or if you want to get in touch with other developers.
- [Webfleet Solutions technical support](#)
Use the online support to access FAQs, user guides and to contact our customer support team.

Other resources

- [Wikipedia article about WGS84](#)
- [Wikipedia article about Geographic coordinate conversion](#)
- [RFC 2616 - Hypertext Transfer Protocol — HTTP/1.1](#)
- [RFC 1738 - Uniform Resource Locators \(URL\)](#)
- [Simple Object Access Protocol \(SOAP\)](#)
- [Web Services Description Language \(WSDL\)](#)
- [SOAP Message Transmission Optimization Mechanism \(MTOM\)](#)
- [ISO 8601](#)
- [Wikipedia article about ISO 8601](#)
- [JSON website](#)
- [Mapcode website](#)
- [ISO 3166-1 alpha-2 codes](#)
- [IEEE guidelines for unique identifiers](#)

Appendix C: Superseded functionality

Table: Superseded functionality

Affected functionality	Announce- ment date End of Life date	Alternatives
SOAP version 1.9	2012-08-06 2012-09-30	All requests to the removed version will be forwarded to the latest compatible SOAP version automatically. No changes in existing integration should be required. Please stop new integrations on this version.
SOAP version 1.8	2012-04-20 2012-07-31	All requests to the removed version will be forwarded to the latest compatible SOAP version automatically. No changes in existing integration should be required. Please stop new integrations on this version.
SOAP version 1.6 and 1.7	2012-04-20 2012-07-12	All requests to the removed version will be forwarded to the latest compatible SOAP version automatically. No changes in existing integration should be required. Please stop new integrations on this version.

Affected functionality	Announce- ment date	Alternatives
	End of Life date	
showLogbookReportExtern	2011-11-09 2013-11-09	showLogbook - Requests to showLogbookReportExtern will be forwarded to showLogbook as of announcement date.
SOAP version 1.5	2011-08-23 2011-10-13	All requests to the removed version will be forwarded to the latest compatible SOAP version automatically. No changes in existing integration should be required. Please stop new integrations on this version.
SOAP version 1.4	2011-08-23 2011-09-12	All requests to the removed version will be forwarded to the latest compatible SOAP version automatically. No changes in existing integration should be required. Please stop new integrations on this version.
SOAP version 1.1 and 1.2	2011-05-30 2011-06-15	All requests to the removed versions will be forwarded to the latest compatible SOAP version automatically. No changes in existing integration should be required. Please stop new integrations on these versions.
SOAP versions 1.0 and 1.3	2011-05-30 2011-07-01	All requests to the removed versions will be forwarded to the latest compatible SOAP version automatically. No changes in existing integration should be required. Please stop new integrations on these versions.
showObjectGroupReportExtern	2011-05-30 2013-05-30	showObjectGroups , requests to showObjectGroupReportExtern will be forwarded to showObjectGroups as of 2011-05-30.
showObjectGroupObjectReportExtern	2011-05-30 2013-05-30	showObjectGroupObjects , requests to showObjectGroupObjectReportExtern will be forwarded to showObjectGroupObjects as of 2011-05-30.
showObjectAccelerationEvents	2011-05-30 2014-05-30	showAccelerationEvents , requests to showObjectAccelerationEvents will be forwarded to showAccelerationEvents as of 2014-05-30.
showObjectSpeedingEvents	2011-05-30 2014-05-30	showSpeedingEvents , requests to showObjectSpeedingEvents will be forwarded to showSpeedingEvents as of 2014-05-30.
geocodeAddressExtern geocodeLocation (SOAP)	2010-12-15 2012-12-15	geocodeAddress , requests to geocodeAddressExtern are currently handled separately from geocodeAddress. We are planning to forward those requests to geocodeAddress in future and will inform you about this change. The corresponding SOAP function geocodeLocation will expire accordingly.

Affected functionality	Announce- ment date	Alternatives
	End of Life date	
Endpoint URLs: http(s)://connect.webfleet.tomtom-work.com https://soap.connect.webfleet.tomtomwork.com	2010-09-30 2013-06-30	Announced with rebranding of TomTom WORK to TomTom Telematics. Alternatives, see Making HTTP requests , Making SOAP requests
showTrailerReportExtern	2010-09-02 2011-09-02	No alternative, support for object category trailer was stopped several years ago
showPersonReportExtern	2010-09-02 2011-09-02	no alternative, support for tracking and locating people was stopped several years ago
showStoplistReportExtern	2010-06-17 2011-06-17	showStandStills , inverted showTripReportExtern
showWorkingTimeDriverReportExtern	2010-02-18 2012-02-18	showWorkingTimes
showWorkingTimeObjectReportExtern	2010-02-18 2012-02-18	showWorkingTimes
showUsageTimeDriverReportExtern	2010-02-18 2012-02-18	No direct alternative. Please contact customer support to discuss your use case to define alternative approaches.
showUsageTimeObjectReportExtern	2010-02-18 2012-02-18	No direct alternative. Please contact customer support to discuss your use case to define alternative approaches.
showOrderMessageReportExtern	2010-01-06 2013-01-06	Make use of the Message queues system.

Appendix D: Solving known issues

Using WEBFLEET.connect SOAP with Visual Basic

When you are using WEBFLEET.connect SOAP with Visual Basic you may encounter some naming conflicts. This is because Visual Basic is not case-sensitive with names. To prevent naming conflicts, you have to edit the WSDL file manually.

For the addressService:

1. Download the WSDL file for the addressService and store it locally.
2. Find the line <:portType name="address"> and replace address with address_if.
3. Find this line <:binding name="addressServiceSoapBinding" type="tns:address"> and replace "address" with "address_if".

Now you can create a new service reference using this file without naming conflicts.

For the ordersService:

1. Download the WSDL file for the ordersService and store it locally.
2. Find the line <xs:simpleType name="RouteType"> and replace RouteType by RouteTypes.
3. Find the line <xs:element default="Quickest" minOccurs="0" name="route-Type" nillable="true" type="ns1:RouteTypes"/> and replace ns1:RouteType by ns1:RouteTypes.

Now you can create a new service reference using this file without naming conflicts.

SOAP message size quota in Visual Studio

By default, Visual Studio restricts the maximum size for SOAP messages to 65536 bytes. In many cases this is too small for production use.

You can increase the size by adjusting the appropriate values in the file **app.config** in your Visual Studio project:

- In element `httpsTransport`, change the values of the attributes `maxReceivedMessageSize` and `maxBufferSize` to a higher value.

Note: Use the same value for both attributes.

- In element `mtomMessageEncoding`, insert attribute `maxBufferSize`.

Note: Set it to the same value as for the attributes above.

Appendix E: Using MTOM with SOAP

MTOM is a technique to send binary data in SOAP messages. Binary data means XML data type `xs:base64Binary`.

Without MTOM, this data would be inlined as a Base64-encoded string. Using MTOM this data is sent as a binary attachment (multipart MIME). The SOAP message contains a reference to the attachment part.

There is a size overhead for the reference to the attachment and for the multipart MIME message. For binary content less than ~1kB per SOAP message it is not worth to use MTOM. It is better to inline base64 encoded data directly instead.

MTOM in the WEBFLEET.connect SOAP API

WEBFLEET.connect is configured to use SOAP 1.2 MTOM binding. This means that all clients must use MTOM binding, too — even if MTOM is not used for a specific request.

Defining binary data in WS parameters

On the server side using byte arrays in JAXB annotated classes will produce xs:base64Binary data type in WSDLs.

The WSDL then has impact on client code generation for some programming languages, such as Java. It is especially useful for very large data (Mbytes) because it allows streaming.

Java Client Code Generation

Given these examples from the server backend used to generate WSDLs:

Code sample: Example from server backend

1.

```
@XmlElement  
public byte[] userData1;
```

2.

```
@XmlElement  
@XmlMimeType("application/octet-stream")  
public byte[] userData2;
```

Java

Java's wsimport will generate client code like this:

Code sample: Java generated code

1.

```
protected byte[] userData1;
```

2.

```
@XmlMimeType("application/octet-stream")  
protected DataHandler userData2;
```

Visual Studio

Visual Studio will generate code like this (Property setter/getters omitted):

Code sample: Visual Studio generated code

1.

```
private byte[] userData1Field;
```

2.

```
private byte[] userData2Field;
```

Data handling

As you can see, Java will generate a `DataHandler` for the member annotated with a content type. This can be useful for very large data. In most cases it is more convenient to operate on simple byte arrays. Using a `DataHandler` has no impact on MTOM vs. inlined base64. The pure byte arrays can also be transported using MTOM.

.NET does not generate any streaming handler code.

Note: Streaming is not covered here in this article. It would require to use `DataHandler` on the server side, too.

Activating MTOM depending on data size

Due to the message size overhead for SOAP attachments we advise to activate MTOM only for binary data larger than ~1Kbytes.

Java – server side

On the server side it is possible to control the threshold for MTOM attachments via annotations on the SEI. The following example will activate MTOM for outgoing binary data larger or equal than 1kB. Smaller binary content will be inlined as base64 encoded string.

Code sample: Activate MTOM for outgoing binary data larger than 1KB

```
@BindingType(value = javax.xml.ws.soap.SOAPBinding.SOAP12HTTP_MTOM_BINDING)
@MTOM(threshold = 1024)
public interface MessagesService { }
```

Java – client side

Here is an example how to use a threshold on binary data sent to the server:

Code sample: Threshold on binary data sent to server

```
MessagesService service = new MessagesService();
MTOMFeature mtom = new MTOMFeature(true, 1024);
Messages messagesPort = service.getMessagesPort(mtom);
```

.NET

.NET has no adjustable threshold. .NET will enable MTOM automatically if the binary content is above a certain size. This seems to be around 800 or 900 bytes.

Testing with soapUI

MTOM must be enabled in soapUI.

For more information please see <https://www.soapui.org/soap-and-wsdl/headers-and-attachments.html#2-Attachments-and-Inline-Files>

Appendix F CAN signal types

CAN signal types

CAN signal types	Description
WARNING_BULB_DEFECT_GROUP_D	(On/Off)
SWITCHEDPOWERSUPPLY	(On/Off)
WARNING_BULB_DEFECT_GROUP_B	(On/Off)
WARNING_BULB_DEFECT_GROUP_C	(On/Off)
WARNING_BULB_DEFECT_GROUP_J	(On/Off)
WARNING_BULB_DEFECT_GROUP_A	(On/Off)
WARNING_BULB_DEFECT_GROUP_F	(On/Off)
WARNING_BULB_DEFECT_GROUP_H	(On/Off)
WARNING_BULB_DEFECT_GROUP_E	(On/Off)
WARNING_BULB_DEFECT_GROUP_G	(On/Off)
WARNING_BULB_DEFECT_GROUP_I	(On/Off)
FUEL_LEVEL	Amount of fuel available in the fuel tank (L)
FUEL_CONSUMPTION	Amount of fuel consumed by the engine (mL)
CHARGER_CONNECTED	Battery charger is connected (electrical vehicles) (On/Off)
CHARGING	Battery is charging (electric/hybrid vehicles) (On/Off)
SYN_WARNING BRAKE_FLUID_LEVEL_LOW	Brake Fluid Level Low (debounced)
SYN_WARNING_COOLANT_LEVEL_LOW	Coolant Level Low (debounced)
SYN_MIL_ABS	Defect ABS (debounced)
SYN_MIL_AIRBAG	Defect Airbag (debounced)
SYN_MIL_BRACING_SYSTEM	Defect Bracing System (debounced)
SYN_WARNING_BULB_DEFECTIVE	Defect Bulb (debounced)
SYN_MIL_CHARGE_CIRCUIT	Defect Charge Circuit (debounced)
SYN_MIL_DIESEL_ENGINE	Defect Diesel Engine (debounced)
SYN_WARNING_DIESEL_PARTICULATE_FILTER	Defect Diesel Particulate Filter (DPF) (debounced)
SYN_MIL ELECTRONIC_POWER_CONTROL	Defect Electronic Power Control (debounced)
SYN_MIL ELECTRONIC_STABILITY_PROGRAM	Defect Electronic Stability Program (debounced)

CAN signal types	Description
SYN_MIL_EMISSION_CONTROL_SYSTEM	Defect Emission Control System (debounced)
SYN_MIL_ENGINE_COOLING	Defect Engine Cooling (debounced)
MILEAGE_TO_INSPECTION	Distance to go before the vehicle needs an inspection (km)
MILEAGE_TO_OIL_SERVICE	Distance to go before the vehicle needs oil service (km)
TRIP_METER	Distance travelled during trip (m)
WARNING_OIL_PRESSURE_LOW	Engine oil pressure is low (On/Off)
RPM	Engine speed (RPM)
DOOR_FRONT_LEFT	Front left door is opened (On/Off)
DOOR_FRONT_RIGHT	Front right door is open (On/Off)
WARNING_FUEL_LEVEL_LOW	Fuel level is low (On/Off)
HOOD	Hood of the car is opened (On/Off)
DAYS_TO_INSPECTION	Number of days before the vehicle needs an inspection (-)
DAYS_TO_OIL_SERVICE	Number of days before the vehicle needs oil service (-)
SYN_WARNING_OIL_LEVEL_CHECK	Oil level check (debounced)
SYN_WARNING_OIL_LEVEL_HIGH	Oil level high (debounced)
SYN_WARNING_OIL_LEVEL_LOW	Oil level low (debounced)
SYN_WARNING_OIL_PRESSURE_LOW	Oil pressure low (debounced)
DOOR_LOCKED_REAR_LEFT	On = locked (On/Off)
DOOR_LOCKED_REAR_RIGHT	On = locked (On/Off)
TRUNK_LOCKED	On = locked (On/Off)
DOOR_LOCKED_FRONT_LEFT	On = locked (On/Off)
DOOR_LOCKED_FRONT_RIGHT	On = locked (On/Off)
WARNING_BULB_DEFECTIVE	One of the lighting bulbs is defective (On/Off)
PARKING BRAKE	Parking brake is applied (On/Off)
SYN_SWITCHED_POWER	Powersupply is active (On/Off) (derived)
MIL_EMISSION_CONTROL_SYSTEM	Problem with the emission control system (On/Off)

CAN signal types	Description
RANGE_FUEL_UNIT	Range Fuel Unit
SYN_ELECTRIC_RANGE	Range until next recharge (km) (derived)
ELECTRIC_RANGE	Range until next recharge (km miles)
SYN_FUEL_RANGE	Range until next refuel (km) (derived)
FUEL_RANGE	Range until next refuel (km miles)
SYN_TOTAL_RANGE	Range until next refuel or recharge (km) (derived)
TOTAL_RANGE	Range until next refuel or recharge (km miles)
DOOR_REAR_LEFT	Rear left door is opened (On/Off)
DOOR_RIGHT_REAR	Rear right door is opened (On/Off)
STATE_OF_CHARGE	State of charge of the battery pack (%)
ENGINE_COOLANT_TEMPERATURE	Temperature of the engines coolant fluid (°C)
WARNING_BRAKE_FLUID_LEVEL_LOW	The brake fluid level is low (On/Off)
WARNING_BRAKE_PAD	The brake pads are worn (On/Off)
ELECTRONIC_PARKING_BRAKE	The electronic parking brake is enabled (On/Off)
WARNING_COOLANT_LEVEL_LOW	The engine coolant level is low (On/Off)
WARNING_OIL_LEVEL_LOW	The engine oil level is low (On/Off)
WARNING_TYRE_PRESSURE_LOW	The pressure of one of the tyres is low (On/Off)
WARNING_WINDSCREEN_WASHER_FLUID_LEVEL_LOW	The windscreen washer fluid level is low (On/Off)
MIL_AIRBAG	There is a problem with one of the airbags (On/Off)
MIL_ABS	There is a problem with the ABS (On/Off)
MIL_BRAKING_SYSTEM	There is a problem with the braking system (On/Off)
MIL_CHARGE_CIRCUIT	There is a problem with the charge circuit (On/Off)
MIL_DIESEL_ENGINE	There is a problem with the diesel engine (On/Off)
WARNING_DIESEL_PARTICULATE_FILTER	There is a problem with the diesel particulate filter (On/Off)
MIL_ELECTRONIC_POWER_CONTROL	There is a problem with the electronic power control (On/Off)
MIL_ELECTRONIC_STABILITY_PROGRAM	There is a problem with the electronic stability program (On/Off)

CAN signal types	Description
MIL_ENGINE_COOLING	There is a problem with the engine cooling system (On/Off)
TOW_BAR_CONNECTED	Tow bar is connected (On/Off)
TRUNK	Trunk is open (On/Off)
SYN_WARNING_TYRE_PRESSURE_LOW	Tyre pressure low (debounced)
VEHICLE_LOCKED	Vehicle is locked (On/Off)
SPEED	Vehicle speed (km/h)
BATTERY_VOLTAGE	Voltage of the battery pack (in electric and/or hybrid vehicles) (V)
WARNING_OIL_LEVEL_CHECK	Warning Oil Level Check (On/Off)
WARNING_OIL_LEVEL_HIGH	Warning Oil Level High (On/Off)
SYN_ZERO_EMISSION_DISTANCE	Zero Emission Distance (km) (derived)

Revision history

WEBFLEET.connect

Webfleet Solutions, WEBFLEET.connect 1.56.0

© 2022 Webfleet Solutions. All rights reserved. WEBFLEET is a registered trademark of Webfleet Solutions B.V. or one of its Affiliates.

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

Revision history

Revision	Date	Description	Author
1.0.0	2004-10-08	Initial release	UM
1.1.2	2005-08-22	Added showTripReportExtern and added the field fuel_usage to CS showTripSummaryReportExtern output	CS
1.1.3	2005-09-29	Added sendDestinationOrderExtern	IM
1.1.4	2005-09-30	Added methods to deal with addresses (Addresses)	ML
1.1.5	2005-09-30	Added parameter addrgrpname to insertAddressExtern , added updateAddressExtern .	ML
1.1.6	2006-04-05	Editorial changes.	IM
1.1.7	2006-04-07	Initial release after conversion to DocBook.	IM

Revision	Date	Description	Author
1.1.8	2006-06-29	Extended parameter set for sendDestinationOrderExtern - added support for GO x10.	IM
1.1.9	2006-08-22	Changed the size of the order text parameter for sendDestinationOrderExtern . Renamed parameter from radium to radius for insertAddressExtern (documentation fix)	IM
1.2.0	2006-11-07	Added methods for order management: insertDestinationOrderExtern , updateOrderExtern , updateDestinationOrderExtern and cancelOrderExtern . Added some notes regarding performance impacts to showMessageReportExtern.	IM
1.2.1	2006-11-24	Corrected the range_pattern for user-defined from du to ud. Changed the parameter addrstate to addrcountry for insertAddressExtern and updateAddressExtern .	IM
1.2.2	2006-12-08	Added value documentation for tripmode for showTripReportExtern . Added value documentation for status, msgstatus and msgtype for showMessageReportExtern.	IM
1.2.3	2007-01-23	Minor editorial changes.	IM
1.3.1	2007-05-07	Extensions to showObjectReportExtern , now returns most recent position data in addition to object details. Added geocodeAddress for geocoding.	IM
1.3.2	2007-07-17	Changed DNS hostname for WEBFLEET.connect to csv.business.tomtom.com. Added documentation of parameter constraints for showMessageReportExtern. Removed filter parameter objectgroupname from several report methods that return message-based data.	IM
1.3.3	2007-07-20	Added examples and corrections to the date format requirements for rangefrom_string and rangeto_string. Changed the result column name for showOrderReportExtern from orderno to orderid. Added some more explanations on how to make HTTP requests.	IM
1.3.4	2007-10-10	Added showOrderMessageReportExtern. Removed user-state from the result set documentation for showMessageReportExtern (for backward compatibility, the column might still be part of the result, but the contents – if any – should be considered as reserved). Minor additions to the documentation of some result columns.	IM
1.3.5	2007-10-12	Added reassignOrderExtern	IM
1.3.6	2008-01-24	New request limits (Request limits) based on functional groups. Updated documentation for showMessageReportExtern with new explanations for msgid-based replication and parameter limits.	IM
1.3.7	2008-05-08	Updated documentation for showTripReportExtern with new explanations for tripid-based replication and interpretation of date range filters.	IM

Revision	Date	Description	Author
1.3.8	2008-07-29	Updated documentation for insertAddressExtern and updateAddressExtern - added description for the parameter visible. Updated documentation for objectno/objectid and order-no/orderid with details about parameter size. Updated documentation for userstate result element for showOrderMessageReportExtern. Updated Creating a user and assigning rights for the new WEBFLEET UI. Added useISO8601 to the general parameters (General parameters).	IM
1.4.0	2008-10-28	Added new details to showObjectReportExtern on page 56: current destination navigated to, eta, current order (if any) and matched address number for the vehicle's current position (all subject to support by the connected device). Added a new section about queue-based access to messages (Overview of queues). Removed documentation for showMessageReportExtern because its use is deprecated and will not be available after 2008-12-31. Added appendixes with operation result codes and recommended resources.	IM
1.5.0	2009-02-16	Added support for address colours to insertAddressExtern , updateAddressExtern and showAddressReportExtern . Extended the filter parameter set for showEventReportExtern and added methods to flag events as acknowledged and as resolved. Added a set of methods for driver management, see Orders . Updated result columns for the object a driver is currently signed onto to showDriverReportExtern .	IM
1.5.1	2009-06-18	Added support for address regions to insertAddressExtern , updateAddressExtern and showAddressReportExtern . Added examples to sendDestinationOrderExtern and showOrderReportExtern .	IM
1.5.2	2009-07-02	Added deleteOrderExtern .	IM
1.6.0	2010-01-06	Minor editorial changes. Added new groups to request limits for driver and event methods. Added section Making SOAP requests . Added documentation for parameter restrictions on showTripReportExtern . Added support for the digital tachograph to showObjectReportExtern , popQueueMessagesExtern and all driver management methods. Removed documentation for showOrderMessageReportExtern (its use is still supported but it should not be used in new work anymore).	IM
1.6.1	2010-02-18	Added new methods: clearOrdersExtern , clearTextMessageExtern . Replaced working and usage time reports with showWorkingTimes .	IM
1.6.2	2010-02-25	Added a clarification regarding supported date/time formats to showWorkingTimes . Expanded the list of documented error codes in Appendix A, Operation Return Codes.	IM

Revision	Date	Description	Author
1.7.0	2010-05-20	Updated the request limit table with new limits for queue access and queue management methods. Expanded the list of documented error codes in Appendix A: Operation response codes . Added new data elements for the TomTom Remote LINK (see Drivers , popQueueMessagesExtern). Added new method to support inventory of devices: showContracts . Added updateVehicle .	IM
1.7.1	2010-06-17	Removed documentation for <code>showOrderMessageReportExtern</code> and <code>showStoplistReportExtern</code> (their use is still supported but it should not be used in new work anymore). Clarification on the message classes that can be used for queue creation. Updated the user creation guide to point out that full permissions on orders might be necessary for certain methods to succeed.	IM
1.7.2	2010-09-02	Clarification on the data size for <code>objectno</code> (10 characters). Added working time information to showDriverReportExtern . Added <code>event_time</code> to popQueueMessagesExtern . Fixed and expanded the <code>source_device</code> enumeration for popQueueMessagesExtern . Added Bluetooth address of a paired Remote LINK device (<code>r11_btaddress</code>) to showObjectReportExtern . Clarification on the supported devices for deleteOrderExtern . Removed documentation for showPersonReportExtern and showTrailerReportExtern (their use is still supported but it should not be used in new work anymore).	IM
1.7.3	2010-12-15	Removed function <code>geocodeAddressExtern</code> from the Reference document and added geocodeAddress . Added new action calcRouteSimpleExtern . Added new result parameter to showWorkingTimes . Added new section Trips and working times and new actions showSpeedingEvents , showAccelerationEvents , showStandStills , showIdleExceptions . Added new parameters to updateVehicle . Added new JSON objects to <code>surplus_data</code> and new message classes to popQueueMessagesExtern . Added parameters to showTripReportExtern . Added parameters to showTripSummaryReportExtern . Added parameters to showVehicleReportExtern . Corrected parameter naming in showDriverReportExtern . Renamed chapters and changed order. Other minor editorial changes.	RH
1.7.4	2011-02-24	Changed description for <code>avg_accel</code> and description of showAccelerationEvents . Updated result list for showTripSummaryReportExtern . Updated parameters list for updateDestinationOrderExtern . Added advise on the use of HTTP authentication in Making HTTP requests . Edited parameter names for showEventReportExtern . Added new parameters to showTripReportExtern . Added description for <code>pin</code> and <code>code</code> for <code>Drivers</code> commands. Extended list of Messages types for popQueueMessagesExtern . Extended list of Operation response codes . Extended information about case-sensitivity of inbound parameters of multiple commands. Added limits for calcRouteSimpleExtern to Default request limit configuration.	RH

Revision	Date	Description	Author
1.8.0	2011-05-24	<p>New end point URLs see Making requests to WEBFLEET.connect. Added new authentication parameter <code>apikey</code> to Common parameters. Extended the list values for date range filter parameter <code>range_pattern</code> in Common parameters. Replaced old function <code>showObjectSpeedingEvents</code> with new function <code>showSpeedingEvents</code>. Replaced old function <code>showObjectAccelerationEvents</code> with new function <code>showAccelerationEvents</code>. Added query and result parameters to <code>showIdleExceptions</code>. Added parameter to <code>showOrderReportExtern</code>. Added result parameters to <code>showObjectReportExtern</code>. Added new functions <code>showObjectGroups</code>, <code>showObjectGroupObjects</code>, <code>attachObjectToGroup</code>, <code>detachObjectFromGroup</code>, <code>insertObjectGroup</code>, <code>deleteObjectGroup</code>, <code>updateObjectGroup</code>. Removed old functions <code>showObjectGroupReportExtern</code> and <code>showObjectGroupObjectReportExtern</code>. Added new chapter Configuration and security with new function <code>showSettings</code>. Added new function <code>showOptiDriveIndicator</code>. Extended list of Response codes. Added new results to <code>showVehicleReportExtern</code>. Added list of superseded functionality Appendix C: Superseded functionality indicating the announcement date, the date of end of life and possible alternatives.</p>	RH
1.9.0	2011-08-23	<p>New functions <code>attachDriverToGroup</code>, <code>detachDriverFromGroup</code>, <code>deleteDriverGroup</code>, <code>insertDriverGroup</code>, <code>showDriverGroups</code>, <code>showDriverGroupDrivers</code>, <code>updateDriverGroup</code>, <code>showUsers</code> in the newly introduced chapter User management. Removed <code>showLogbookReportExtern</code>. New parameter to filter on entities that are not assigned to certain entity groups for <code>showObjectReportExtern</code>, <code>showDriverReportExtern</code> and <code>showAddressReportExtern</code>. Extended result list for <code>showObjectReportExtern</code> with <code>drivername</code>, <code>codrivername</code> and <code>pos_time</code>. New result <code>objectcount</code> in <code>showObjectGroups</code>. Unformatted latitude/longitude results with <code>showAddressReportExtern</code>. Updated Appendix C: Superseded functionality, please read carefully. Added important notes to Making HTTP requests. Introduced new general parameter <code>columnfilter</code> to be used with all functions, see General parameters. Added technical details, such as SOAP function name and endpoint address and request limits to each function. Most important outbound messages relating to text messages and order messages are now available in the queue system, see Message queues. Other miscellaneous edits. Added note about how orders appear on the TomTom navigation device to <code>sendOrderExtern</code> and <code>sendDestinationOrderExtern</code>. Added instructions for integrators working with SOAP and Visual Basic with regards to WEBFLEET.connect addresses and MTOM encoding support, see Making SOAP requests. Added error codes to Response codes. Added a new section called Terminology explaining terms used in the context WEBFLEET, WEBFLEET.connect, and WEBFLEET solutions, products, and features. Edits to the list of Messages types. Information about Synchronising driver lists.</p>	RH

Revision	Date	Description	Author
1.10.0	2011-11-09	<p>New functions insertMaintenanceSchedule, updateMaintenanceSchedule, deleteMaintenanceSchedule, showMaintenanceSchedules, showMaintenanceTasks, resolveMaintenanceTask, updateLogbook, showLogbook, showLogbookHistory. Added co2 to result list of showTripSummaryReportExtern. showWorkingTimes supports now all time/date values listed in Date range filter parameters. Contact and driver details that relate to an order are included in the result of showOrderReportExtern. Added drivertelmobile and codrivertelmobile to the result list of showObjectReportExtern. Added new parameter addrno to insertDriverExtern, updateDriverExtern and showDriverReportExtern. Added parameters addrno, positiony and positionx to showDriverReportExtern. The working state of a vehicle is indicated even when no driver has signed on using showObjectReportExtern. Added information about input and return date formats to Making HTTP requests, Making SOAP requests and General parameters. Distinction between SOAP and CSV General parameters. Superseded functionality - geocodeLocation will be superseded together with geocodeAddressExtern. Superseded functionality - showLogbookReportExtern will be superseded. Added new error codes to Appendix A: Operation return codes.</p>	RH
1.10.1	2011-11-09	<p>Adjusted maximum values for parameters intervalodometer, remindingodometer, plannedexecodometer of insertMaintenanceSchedule and updateMaintenanceSchedule. Minor other edits.</p>	RH
1.11.0	2012-01-30	<p>Added new functions showAccountOrderStates, updateAccountOrderState, switchOutput, showTracks, attachDriverToVehicle, detachDriverFromVehicle. Added new parameters name2 and name3 to insertDriverExtern and updateDriverExtern. Added new column manualassignment to result list of showDriverReportExtern. Added new parameter useorderstates that defines the order states that appear in the order workflow per order to sendOrderExtern and send-DestinationOrderExtern. Added two new parameters latitude_mdeg and longitude_mdeg, with unit of measurement in micro degrees, to the result list of showObjectReportExtern and showEventReportExtern. Added useUTF8 parameter to General parameters. Added to the list of terms explained in the Terminology chapter the section Vehicle maintenance including the definitions of Maintenance schedule and Maintenance task. Other minor editorial changes.</p>	RH

Revision	Date	Description	Author
1.12.0	2012-04-13	<p>Added new parameter <code>target_username</code> and result columns to showSettings. Added showAccountOrderAutomations and updateAccountOrderAutomation. Added parameter <code>orderautomations</code> to sendOrderExtern, sendDestinationOrderExtern, assignOrderExtern, reassignOrderExtern, updateOrderExtern, updateDestinationOrderExtern. Added parameter <code>odometer</code> to updateVehicle. Added parameter <code>objectuid</code> to showObjectReportExtern, showVehicleReportExtern, showContracts, updateVehicle, showObjectGroupObjects, attachObjectToGroup, detachObjectFromGroup, switchOutput. Added result <code>objectuid</code> to showObjectReportExtern, showVehicleReportExtern, showContracts, showObjectGroupObjects. Added parameter <code>objectuid</code> to showTracks. geocodeAddress parameter provider can now also be the new TomTom Geo Coder Version 2.</p>	RH
1.12.1	30.05.2012	Introduces the support of the LINK 510 (see Messages types and switchOutput) and other minor edits.	RH
1.12.2	15.06.2012	Introduction of itinerary orders: Added waypoint parameter <code>wp</code> (waypoint) to sendDestinationOrderExtern , updateDestinationOrderExtern , insertDestinationOrderExtern . New action showOrderWaypoints . Edits to list of Messages types and Response codes . Making HTTP requests - added HTTP POST support for a limited number of actions)	RH

Revision	Date	Description	Author
1.13.0	06.08.2012	<p>Added FMS and acceleration surplus_data to popQueueMessagesExtern. New result order_addrno in popQueueMessagesExtern. showOrderReportExtern - Added destination address details to result list. showNearestVehicles delivers a list of vehicles that are within a defined distance to a specific location. showWakeupTimers delivers a list of days and times when the LINK 3xx/510 is set to automatically wake up. updateWakeupTimers lets you define new and change existing days and times when the LINK 3xx/510 device shall automatically wake up. Added new parameter rpmlimit to updateVehicle that sets a maximum number of revolutions per minute for the vehicle's engine that is being used for reporting on rpm violations. Added new results vh_rpmlimit and fl_rpmlimit to showVehicleReportExtern. Added new result fuellevel to showObjectReportExtern. showDriverReportExtern - Added new result pin that is used by the driver to logon to the Driver Terminal. updateLogbookMode changes the logbook mode on the LINK 3xx/510 device. Added new parameter acceleration_types to showAccelerationEvents. Added the parameter objectuid as an alternative to objectno to sendOrderExtern, insertDestinationOrderExtern, sendDestinationOrderExtern, assignOrderExtern, reassignOrderExtern, clearOrdersExtern, showOrderReportExtern, attachDriverToVehicle, detachDriverFromVehicle, showTripReportExtern, showTripSummaryReportExtern, showLogbook, showLogbookHistory, showWorkingTimes, showStandStills, showIdleExceptions, sendTextMessageExtern, clearTextMessagesExtern, insertMaintenanceSchedule, showMaintenanceSchedules, showMaintenanceTasks, showIORReportExtern, showAccelerationEvents, showSpeedingEvents, showEventReportExtern. Added new result objectuid to showOrderReportExtern, showDriverReportExtern, showTripReportExtern, showTripSummaryReportExtern, showLogbook, showLogbookHistory, showWorkingTimes, showStandStills, showIdleExceptions, popQueueMessagesExtern, showMaintenanceSchedules, showMaintenanceTasks, showIORReportExtern, showAccelerationEvents, showSpeedingEvents, showEventReportExtern. Added new error codes to Appendix A: Operation return codes.</p>	RH

Revision	Date	Description	Author
1.14.0	06.11.2012	<p>New action getObjectKPIs. New parameter modified_since and new results start_latitude, start_longitude, end_latitude, end_longitude, avg_speed, max_speed, fuel_usage, co2, end_addrname1, end_addrname2, end_addrname3, end_addrcontact for showLogbook. showTracks has the new result parameters odometer, country, state. Added information on limitations to the description of updateLogbookMode. New actions createSession, terminateSession, changePassword. Added new parameter sessiontoken to Authentication parameters. Extended type-list within in the result additional_information of geocodeAddress. showAccelerationEvents has new results duration, severity and roadspeedlimit. showSpeedingEvents has new results duration and distance. For showOrderReportExtern, Date range filter parameters are not required if orderid is indicated. New Date range filter parameters sessiontoken, 2020, month, day. Updated Operation response codes. Updated the description of acel_dir in showAccelerationEvents.</p>	RH
1.15.1	13.03.2013	<p>Added new section LINK.connect. Added new actions sendAuxDeviceData, getLocalAuxDeviceConfig, configureLocalAuxDevice, getRemoteAuxDeviceConfig, configureRemoteAuxDevice, removeRemoteAuxDeviceConfig, clearAuxDeviceDataQueue, resetAuxDeviceData. Added to popQueueMessagesExtern new LINK.connect related message types to Messages types and added new JSON objects. Added new section Reporting. Added new actions getArchivedReportList, getArchivedReport, deleteArchivedReport, getReportList, createReport, sendReportViaMail. Added new section Appendix E: Using MTOM with SOAP. Added new parameter deleteaddresses to deleteAddressGroupExtern, that deletes all addresses assigned to the indicated address group too. The odometer value can now be updated for navigation devices too using updateVehicle. Added new result referenceno to showContracts. Edits to Appendix A: Operation return codes.</p>	RH
1.16.0	10.04.2013	<p>Added actions showMessages, getObjectFeatures. Added new property dur to table Parameters specific to acc_events in popQueueMessagesExtern. Updated updateDestinationOrderExtern - ordertext is optional. Introduced new parameter/result driveruid/codriveruid to popQueueMessagesExtern, showObjectReportExtern, showDriverReportExtern, updateDriverExtern, deleteDriverExtern, showOptiDriveIndicator, showDriverGroupDrivers, attachDriverToGroup, detachDriverFromGroup, attachDriverToVehicle, detachDriverFromVehicle, showTripReportExtern, showWorkingTimes, showIdleExceptions, showAccelerationEvents, showSpeedingEvents. Introduced new parameter/result externalid to createSession, showVehicleReportExtern, showObjectReportExtern, showTripReportExtern, showStandStills, showTracks, showAccelerationEvents, showSpeedingEvents, getObjectKPIs. Parameter msgclass has an additional value for LINK.connect messages in the following actions createQueueExtern, deleteQueueExtern, popQueueMessagesExtern, ackQueueMessagesExtern.</p>	RH

Revision	Date	Description	Author
1.17.0	21.08.2013	Introduced new action updateContractInfo which allows to assign and change an customer specific reference number per object. Introduced new parameter freetext to geocodeAddress . Introduced new parameter ep_btaddress and rl1_btaddress to updateVehicle . Introduced new result passwordexpiration for showUsers , createSession . Introduced new result creationtype for showMaintenanceSchedules . Added troublecodes to surplus_data in popQueueMessagesExtern and JSON structure Parameters specific to troublecodes . New msg_type 80000880 indicating that the list of current vehicle Diagnostic Trouble Codes has changed. Introduced new result obu_btaddress to showVehicleReportExtern . Introduced driveruid to result list of showOptiDriveIndicator , showDriverGroupDrivers , showTripReportExtern , showLogbook , showWorkingTimes , showIdleExceptions , showAccelerationEvents , showSpeedingEvents , showOrderReportExtern . Added SOAP message size quota in Visual Studio to Appendix D: Solving known issues .	RH
1.18.0	21.08.2013	Introduced new chapter Areas with the following actions: getAreas , getAreaPoints , deleteArea , insertArea , updateArea , getAreaAssignments , insertAreaAssignment , deleteAreaAssignment , getAreaSchedules , insertAreaSchedule , deleteAreaSchedule .	RH
1.19.0	15.02.2014	Introduced new functions insertUser , updateUser , deleteUser , getUserRights , setUserRight , removeUserRight , getStatusMessages , setVehicleConfig , getAccountStatusMessages . Added new result useruid to showUsers . Added new parameters drivergroupname and objectgroupname to showWorkingTimes . Added new parameters addrnr and addruid and result addruid to showAddressReportExtern . Introduced result addressgroupid to showAddressGroupReportExtern . Added parameter addruid to updateAddressExtern . In insertDriverExtern the parameters code and pin are optional. showDriverGroups returns drivergroupuid . WEBFLEET.connect supports JSON throughout the whole range of functions. To define the response format the parameter outputformat was introduced to the list of General parameters .	RH
1.19.1	31.03.2014	TomTom Business Solutions was renamed to TomTom Telematics.	RH
1.20.0	02.04.2014	The following functions are new getEventForwardConfigs , getEventForwardConfigRecipients , insertEventForwardConfig , updateEventForwardConfig , deleteEventForwardConfig , resetUserRights . Added output parameters addruid and addressgroupid to showAddressGroupAddressReportExtern . Added addruid to updateAddressExtern , deleteAddressExtern , attachAddressToGroupExtern , detachAddressFromGroupExtern . Added parameter addrgrpuid to insertAddressExtern , attachAddressToGroupExtern , detachAddressFromGroupExtern , deleteAddressGroupExtern . Parameters notify_enabled and notify_leadtime in updateDestinationOrderExtern are not supported anymore. Added new parameter duetype to showMaintenanceTasks . Added right level edit_usersettings to List of supported right levels	RH

Revision	Date	Description	Author
1.21.0	01.08.2014	WEBFLEET error codes are now also returned in HTTP header fields, Making HTTP requests . Added new result pnd_mapversion to showContracts . Added new parameter ep_type to updateVehicle and showVehicleReportExtern .	RH
1.21.1	15.08.2014	The process of requesting access to APIs has changed, Access to WEBFLEET.connect with API Key	RH
1.23.0	05.11.2014	Introduced sendBinaryMessage , resetBinaryMessages and clearBinaryMessages . Introduced sendBinaryMessage , resetBinaryMessages and clearBinaryMessages that allow to send and manage messages transmitting raw binary data that can be used by third party apps installed on the driver terminal. popQueueMessagesExtern : Added new surplus_data relevant for the transfer of binary data for third party apps installed on the driver terminal. Introduced getRemainingDrivingTimesEU that assists fleet managers to determine remaining driving times of their truck drivers. Introduced getDriverKPIs and getObjectKPIs to retrieve the Key Performance Indicators of individual drivers or objects. getObjectKPIs is the successor action of getKPIs . All calls to getKPIs will be redirected to getObjectKPIs . With the new parameter (and result) color in getAreas , insertArea , updateArea you can define and retrieve the colour of an area as a 6-digit hex RGB-color code. The actions insertUser and updateUser come with the new parameter interfacestyle, that lets you define which type of interface a user is supposed to see/use in WEBFLEET. The new profile values invoices_user and report_recipient have been added to the actions insertUser and updateUser . Extended the List of supported right levels to include the rights levels report_read_access, enable_device_configuration_management and report_edit_access. Added new result msisdn to showContracts . Added objectgroupid to the results of showObjectGroupObjects and to the list of parameters of showObjectGroups . The new getVehicleConfig lets you retrieve LINK specific configurations. Introduced setStatusMessages and setAccountStatusMessages to set the predefined text and order status messages for individual vehicles and for the WEBFLEET account. The newly introduced mapcode parameter offers an alternative to longitude and latitude when determining locations using sendDestinationOrderExtern , insertDestinationOrderExtern , updateDestinationOrderExtern , insertAddressExtern , updateAddressExtern . Added new result value mapcode to showOrderReportExtern , showAddressReportExtern .	RH
1.24.0	19.01.2015	Assigning the relevant WEBFLEET.connect user rights to WEBFLEET users in the WEBFLEET user interface has changed. The instructions in Creating a user and assigning rights have been amended to reflect these developments. showEventReportExtern : Added new result pos_time that indicates the time of the last known position when the event occurred.	RH

Revision	Date	Description	Author
1.25.0	28.04.2015	<p>We have extended the result list for showOptiDriveIndicator to include all relevant parameters for OptiDrive 360.</p> <p>We have extended the result list for showSettings to include the four new parameters that show the weights of coasting, constant speed, green speed and gear shift.</p>	RH
1.26.0	16.12.2015	<p>Itinerary orders - PRO 7100/7150, PRO 9100/9150 and PRO 5150 support up to 1000 waypoints/order. PRO 8270/8275 support up to 250 waypoints/order. PRO 5250, PRO 7250 do not support itinerary orders. The affected functions are: sendDestinationOrderExtern, updateDestinationOrderExtern, insertDestinationOrderExtern.</p> <p>showVehicleReportExtern and updateVehicle have the new optional parameter <code>manufacturedyear</code> that indicates the year a specific vehicle was manufactured.</p> <p>With the new parameter <code>intervaltimetype</code> in insertMaintenanceSchedule and updateMaintenanceSchedule you can define maintenance schedules timely more flexible. <code>intervaltimetype</code> lets you differentiate between days, weeks, months and year. <code>intervaltimetype</code> has been added to the result list of showMaintenanceSchedules too.</p> <p>Minor edits and improvements.</p>	RH
1.27.0	31.03.2016	<p>Using showMaintenanceTasks you can retrieve all relevant information on the next maintenance tasks as it is shown in the WEBFLEET user interface. There is no need to make additional calls using showMaintenanceSchedules anymore. For this we have added the parameter <code>schedulename</code> and we have added <code>schedulename</code>, <code>scheduletype</code> and <code>schedulecreationtype</code> to the result list.</p> <p>Improved support of various driver authentication devices by Adding parameter <code>driver_key</code> to insertDriverExtern and updateDriverExtern; Adding <code>driver_keys</code> to result list of showDriverReportExtern; Adding <code>driverkey_deviceaddress</code> to the result list of showObjectReportExtern; Adding <code>driverkey_deviceaddress</code> and <code>driverkey</code> to the result list of popQueueMessagesExtern.</p> <p>Minor edits and improvements.</p>	RH

Revision	Date	Description	Author
1.28.0	01.05.2016	<p>Using showMaintenanceTasks you can retrieve all relevant information on the next maintenance tasks as it is shown in the WEBFLEET user interface. There is no need to make additional calls using showMaintenanceSchedules anymore. For this we have added the parameter <code>schedulename</code>, <code>scheduletype</code> and <code>schedulecreationtype</code> to the result list.</p> <p>Improved support of various driver authentication devices by:</p> <ul style="list-style-type: none"> • Adding parameter <code>driver_key</code> to insertDriverExtern and updateDriverExtern • Adding <code>driver_keys</code> to result list of showDriverReportExtern • Adding <code>driverkey_deviceaddress</code> to the result list of showObjectReportExtern • Adding <code>driverkey_deviceaddress</code> and <code>driverkey</code> to the result list of popQueueMessagesExtern • Minor edits and improvements 	RH
1.29.0	30.06.2016	<p>showUsers returns the <code>email</code> address of the user.</p> <p>Minor edits and improvements</p>	RH
1.30.1	01.09.2016	<p>showTripReportExtern returns the following OptiDrive 360 related parameters: <code>optidrive_indicator</code>, <code>speeding_indicator</code>, <code>drivingevents_indicator</code>, <code>idling_indicator</code>, <code>fuelusage_indicator</code>, <code>coasting_indicator</code>, <code>constant_speed_indicator</code>, <code>green_speed_indicator</code>, <code>high_revving_indicator</code></p> <p>showObjectReportExtern returns the parameter <code>fuelLevelMilliliters</code>.</p>	RH
1.31.0	30.11.2016	<p>Introduced the new <code>fuelreference</code> parameter to both showVehicleReportExtern and updateVehicle. Using this parameter you select which source shall be used as fuel reference.</p> <p>geocodeAddress - parameter <code>provider</code> not supported anymore.</p> <p>insertDriverExtern and updateDriverExtern support both driver key types Remote LINK and RFID used with the PRO 2020 Driver Terminal.</p> <p>endpoints have changed from <code>soap.business.tomtom.com</code> to <code>soap.telematics.tomtom.com</code> and from <code>csv.business.tomtom.com</code> to <code>csv.telematics.tomtom.com</code></p>	RH
1.32.0	01.09.2017	<p>Migrated document from legacy system.</p> <p>Various edits and improvements.</p> <p>Not released due to impending bug fix.</p>	CH

Revision	Date	Description	Author
1.33.0	05.10.2017	<p>Added chapters Getting started with HTTP requests and Getting started with SOAP requests to Programming Guide.</p> <p>Removed colour <code>ivory</code>. This affects showVehicleReportExtern and updateVehicle.</p> <p>The list of message types was updated. It now shows the full <code>msg_type</code> numbers. Additionally, you can see now on which message queues a message is available.</p> <p>Double entries in the parameter tables of popQueueMessageExtern have been removed.</p> <p>Added note on usage for updateAddressExtern. If certain parameters are not specified in a request, these parameters are deleted.</p> <p>showDriverReportExtern: The parameter <code>driver_keys</code> only appears in a response. It was moved from the Parameters to the Result table.</p> <p>The colour <code>ivory</code> has been removed. This affects showVehicleReportExtern and updateVehicle.</p> <p>The GO 715 device has been discontinued. Information on this device was removed.</p> <p>Added the value "3 – Worker" to the parameter <code>role</code> in the Result table of showWorkingTimes.</p> <p>Added the value "3 – Worker" to the parameter <code>signonrole</code> in the Result table of showDriverReportExtern.</p> <p>Minor edits and improvements.</p>	CH
1.35.0	26.02.2018	<p>popQueueMessagesExtern - introduced the new parameter <code>location_params</code>, which is currently being tested.</p> <p>The list of message types was updated (Acceleration event and Working time event).</p> <p>showObjectReportExtern - renamed parameter <code>fuelLevelMilliliters</code> to <code>fuellevel_milliliters</code></p> <p>Minor edits and improvements.</p>	RH
1.37.0	12.07.2018	<p>Added the new topic HTTP request encoding</p> <p>showOrderWaypoints - parameter <code>orderid</code> is mandatory</p> <p>Minor edit and improvements</p>	RH
1.39.0	09.10.2018	<p>Added the new chapter Plugins including the actions insertExternalEvent and setExternalObjectData to be used for the additional feature WEBFLEET Plugin.</p>	RH
1.40.1	08.01.2019	<p>Enhanced SOAP documentation - added new SOAP parameters topic, added SOAP request examples to showObjectReportExtern, sendDestinationOrderExtern and showOrderReportExtern</p>	RH
1.40.1 - update	01.02.2019	Minor editorial changes.	RH
1.40.1 - update	19.02.2019	Added some message types .	RH

Revision	Date	Description	Author
1.42.0	09.04.2019	Removed unsupported inside/outside value for notificationmode from insertArea and updateArea . Added new surplus data to popQueueMessageExtern . er_tripdata provides additional trip information for optimal eco reporting.	RH
1.43.0	20.05.2019	The handling of rights to see position time and user information for showEventReportExtern has changed and can return empty results for pos_time, ackuser and resuser paramters.	RH
1.44.0	16.07.2019	Minor changes.	RH
1.45.0	01.08.2019	Introducing two new actions getDriverRdtRules and updateDriverRdtRules Minor changes and edits.	RH
1.46.0	21.10.2019	Introducing new return value engine_operation_time to action showObjectReportExtern . updateVehicle introduces the option to update the vehicle objectno.	RH
1.47.0	29.01.2020	location parameter not supported anymore in all actions related to addresses . Introduced new message types on cruise control, engine status and engine oil and coolant temperature. The new surplus data ioname for popQueueMessagesExtern provides the name of the input or output when switched on or off. Introducing the two new actions getObjectCanSignals and getObjectCanMalfunctions , that let you retrieve the latest received CAN signal values for one or more objects in an account and the current state of CAN based malfunctions of an object. Using the newly introduced parameter output_name for action switchOutput you can specify the output instead of relying on the order that is pre-configured. URLs, endpoints and references to the company and products have been amended according to the migration from TomTom Telematics to Webfleet Soutions.	RH
1.48.0	01.04.2020	Introduced new action showDigitalInputStateMileage to retrieve all possible switching state combinations of digital inputs along with mileage information. Minor other edits.	RH
1.49.0	27.07.2020	Disabling MTOM – You can enforce non-MTOM responses in the SOAP API. vehicleUpdate supports all vehicle types that are available in the vehicle icon gallery in WEBFLEET. Some vehicle types are not supported for all colours.	RH
1.50.0	28.08.2020	Introduced new action getElectricVehicleData . Introduced new action updateLogbookDriver . Added missing features for action getObjectFeatures .	HR

Revision	Date	Description	Author
1.51.0	09.12.2020	<p>Documented parameter restrictions for actions showAccelerationEvents and showSpeedingEvents.</p> <p>Removed documentation about how to create users using WEBFLEET classic.</p> <p>Added PRO 8375 and PRO 8475 to sendDestinationOrderExtern, updateDestinationOrderExtern, insertDestinationOrderExtern.</p> <p>Adapted description for response code 25001.</p>	HR
1.53.0	25.05.2021	<p>Documented new result values of action getRemainingDrivingTimesEU.</p> <p>Added the fuel type values for electric and hybrid vehicles to showVehicleReportExtern and updateVehicle</p>	HR
1.55.0	30.11.2021	<p>Introduced new action getActiveAssetCouplings</p> <p>Documented new malfunction codes for getObjectCanMalfunctions</p> <p>Documented new return parameters for getObjectFeatures</p> <p>Documented new parameters for insertDriverExtern, updateDriverExtern and showDriverReportExtern</p>	HR

Revision	Date	Description	Author
1.56.0	17.03.2022	<p>Extended information about HD Tracking at Tracking and tracing</p> <p>Documented message types at Message types</p> <p>Extended description of parameter engine_operation_time of action showObjectReportExtern</p> <p>Added documentation of parameter identnumber for actions showVehicleReportExtern, updateVehicle</p> <p>Documented new parameter accelerationvehicletype for actions showVehicleReportExtern, updateVehicle</p> <p>Added PRO 7350 and PRO 5350 to documentation of parameter WP for actions sendDestinationOrderExtern, updateDestinationOrderExtern and insertDestinationOrderExtern</p> <p>Documented that use of orders waypoint parameters notify and visible is discouraged at Parameters in wp</p> <p>Documented that LINK.connect feature is necessary to use action sendBinaryMessage</p> <p>Fixed typo in parameter idling_wastedfuel for action showOptiDriveIndicator</p> <p>Documented new result parameter drivergroupuid for action showDriverGroupDrivers</p> <p>Extended documentation of parameter radius for action insertAddressExtern and updateAddressExtern</p> <p>Documented new result parameter energy_usage for actions showTripReportExtern, showTripSummaryReportExtern, showTracks and showLogbook</p> <p>Documented new result parameter energy_consumption for action showSettings</p> <p>Removed filter restriction for action showWorkingTimes</p> <p>Corrected name of parameter resettoaccount for action setStatusMessages</p> <p>Documented missing scheduletype 25 & 26 for actions insertMaintenanceSchedule, updateMaintenanceSchedule, showMaintenanceSchedules and showMaintenanceTasks</p> <p>Documented missing response code 9500 at Response codes</p>	MO